



#### Color Variants

**RC472701**  
with temperature controlled drawer  
Fully integrated appliance

#### Included accessories

1 x egg box with lid.

#### RC472701

**Refrigeration column**  
with temperature controlled drawer  
Fully integrated appliance  
Width 30" (76.2 cm)

- Width 30" (76.2 cm)
- Stainless steel interior
- Generous LED lighting concept
- Solid aluminum door bins
- Net volume 17.1 cu.ft.
- Temperature controlled drawer (32 °F to 37 °F)
- One motorized glass shelf, adjustable when fully loaded
- ENERGY STAR® qualified

#### Operation

Electronic precision temperature control with digital temperature display.

#### Technical features

Dynamic cool air distribution with Multi-Flow Air system.  
Automatic defrosting with defrost water evaporation.  
Activated charcoal air filter.  
Energy-saving vacation mode.  
Open-door and malfunction warning system.

#### Cooling compartment

Net volume 17.1 cu.ft. (416 liters).  
No-frost technology with fast cooling.  
Temperature adjustable from 35 °F to 46 °F (+2 °C to +8 °C).  
4 safety glass shelves (one is motorized, two are manually adjustable).  
2 fully extendable drawers (low and high) with transparent front.  
Bright interior lighting with LED sidewall pillars.  
3 height adjustable door bins, one of which is a large gallon door bin.  
1 door bin with transparent front flap.

#### Temperature controlled drawer

Net volume 0.9 cu. ft.  
Separate automatic temperature control with settings for fish (32°F), meat (35°F) and produce (37°F).  
1 continuous, fully-extendable temperature controlled drawer with transparent front and integrated lighting.

#### Planning notes

Flat hinge.  
Door hinge right, reversible.  
Door opening angle of 115°, optional 90° door stop.  
Max. door panel weight 77 lb.

#### Consumption data

Energy consumption 0.875 kwh/24 h.  
Energy consumption 319.38 kwh/year.  
Noise level 39 dB.

#### Rating

Total rating 0.180 kW.  
Total Amps: 15 A.  
120 V / 60 Hz  
Connecting cable 78 3/4" with plug.

#### Product Features

**Multi-Flow Air Tower**

Yes

**SUPERCOOL**

Yes

**SUPERFREEZE**

No

**Carbon Air Filter**

No

**Temperature Controlled Drawer**

Yes

**Humidity Control Drawer**

Yes

**Number of Door Bins - Refrigerator**

2

**Adjustable Door Bins - Refrigerator**

No

**Tilt-Out Door Bins - Refrigerator**

Yes

**Gallon Storage Bins**

1

**Number of Shelves - Refrigerator**

4

**Door Hinge**

Right reversible

**Adjustable Shelves - Refrigerator**

3

**Number of Shelves - Freezer**

**Reversible Door Hinge**

Yes

**Adjustable Shelves - Freezer**

No

#### Consumption and connection features

**UPC code**

825225899921

**Color / Material housing**

Colour.Material door

**Panel ready**

**Silence level (dBA)**

39

**Watts (W)**

180

**Current (A)**

15

**Volts (V)**

120

**Frequency (Hz)**

60

**Total annual energy consumption (kWh)**

319.38

**Energy Star® qualified**

Yes

**Approval certificates**

ETL, ETL C

**Power Cord Length**

78 3/4"

**Required cutout size (HxWxD) (in)**

84" x 30" x 24 3/4"

**Appliance Width (in)**

29 3/4"

**Height (in)**

83 3/4 "

**Depth (in)**

24"

**Capacity in 0.75l (bordeaux bottles)**

**Total unit gross capacity (cu. ft.) - AHAM**

17

**Product packaging dimensions (HxWxD) (in)**

88.97 x 33.46 x 29.52

**Refrigerator Gross capacity (cu. ft.)**

17

**Freezer Gross capacity (cu ft)**

**Net weight (lbs)**

396

**Gross weight (lbs)**

433

**SKU**


RC472701

**2013-10-19**


Page 1

RC472701  
 Refrigeration column  
 with temperature controlled drawer  
 Fully integrated appliance  
 Width 30" (76.2 cm)

2013-10-19  
 Page 2

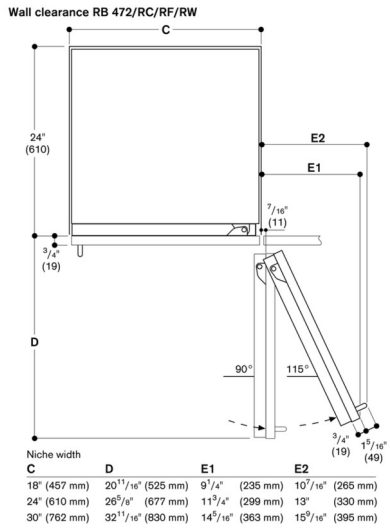

The drawing is based on a cabinet panel width of 3/4" (19 mm) and a Gaggenau cabinet handle height of 1 7/16" (49 mm).

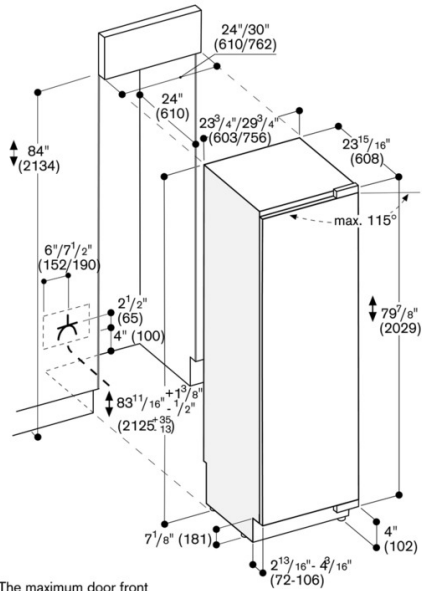

The maximum door front measurements are designed for a gap measurement of 3 mm.