



Home Comfort FFHP092SQ2

Ductless Mini-Split Air Conditioner/Heat Pump

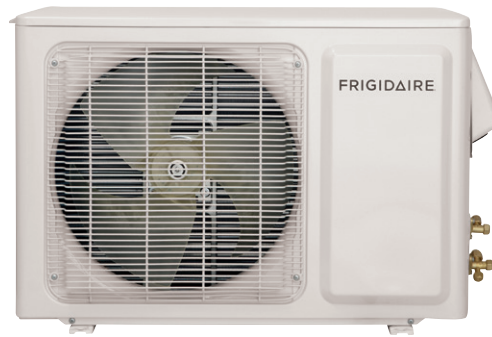

FFHP092WQ2¹ Indoor



FFHP092CQ2¹ Outdoor

Product Dimensions Evaporator (Indoor) Model

Height	10-7/8"
Width	33-1/4"
Depth	7-1/8"

Product Dimensions Condenser (Outdoor) Model

Height	21-1/4"
Width	33-7/16"
Depth	12-5/8"

More Easy-To-Use Features

Multi-Speed Fan

Features three different fan speeds, for more cooling flexibility.

Effortless™ Restart

Automatically resumes operating at its previous settings when power is restored to your unit.

Effortless™ Clean Filter

Our antibacterial filter reduces bacteria, room odors and other airborne particles for a healthier, more comfortable environment.

Ready-Select® Controls

Easily select options with the touch of a button.

Electronic Controls

Allow you to set the comfort level to your preference, while a convenient temperature readout displays the set temperature.

Signature Features

Quick Cool & Quick Warm

When you need to cool down quickly or warm up faster, use the quick cool/warm mode to speed up the fan.

Programmable 24-Hour On/Off Timer

Customize times to fit your schedule for immediate comfort when you get home. The built-in timer allows you to preset the unit to turn on and off in half-hour increments.

Effortless™ Temperature Control

Our air conditioners maintain the preset room temperature, so you will remain comfortable at all times.

Sleep Mode

Maximum comfort throughout the evening hours with the added benefit of energy savings. With Sleep Mode, the temperature gradually increases a few degrees over the evening.


Performance	BTUs
Cool	9,000
Heat	9,800

¹Photo may not represent actual model.


Model Numbers	
Set Model Number	FFHP092SQ2
Indoor Unit Part Number	FFHP092WQ2
Outdoor Unit Part Number ¹	FFHP092CQ2
Performance	
BTU (Cool)	9,000
BTU (Heat Pump)	9,800
Cooling Area (Sq. Ft.)	400
SEER (Air Conditioner)	22
HSPF (Heat Pump)	9.2
Inverter Technology	Yes
COP	3.80
Electrical	
Volts	230V/208V
Min Circuit Ampacity	10 A
Maximum Circuit Breaker	15 A
Rated Amps (Cool)	2.8
Rated Watts (Cool)	620
Rated Amps (Heat)	3.1
Rated Watts (Heat)	750
Features	
Controls	Ready-Select® Controls
Fan Speeds (Cool/Fan/Heat)	4/3/4
Low Voltage Start-Up	Yes
Turbo Fan	Yes
Auto Fan	Yes
Energy Saver	
Sleep Mode	Yes
24-Hour On/Off Timer	Yes
Remote Control	Full-Function
Air CFM (High/Med/Low) Indoor	(306/277/253) 218
Air Direction Control (Vert./Horz.)	Swing/Manual
Air Discharge (Full-Width)	Bottom
Filter Type	Antimicrobial Mesh
Filter Access	Slide-Out
dB Indoor (Turbo)(High/Med/Low)	(43)(38/35/32)
dB Outdoor	52
Warranty ²	Yes
Included Accessories	
Drain Kit (Outdoor Unit)	Yes
Installation Plate (Indoor Unit)	Yes
Line Set Kit (Indoor Unit)	Yes
Remote Holder (Indoor Unit)	Yes

¹Includes 25 ft. line set

²5 year parts only

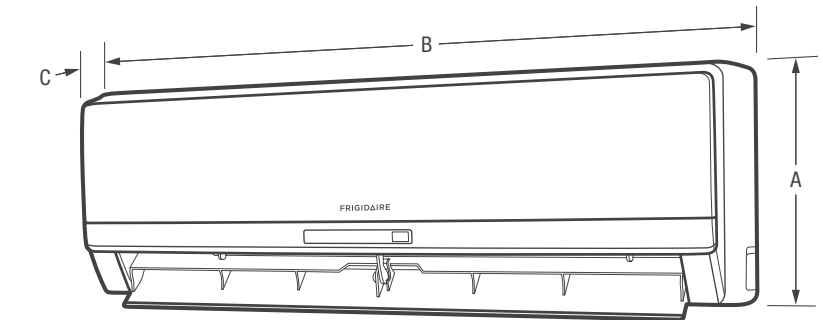

FFHP092WQ2¹ Indoor

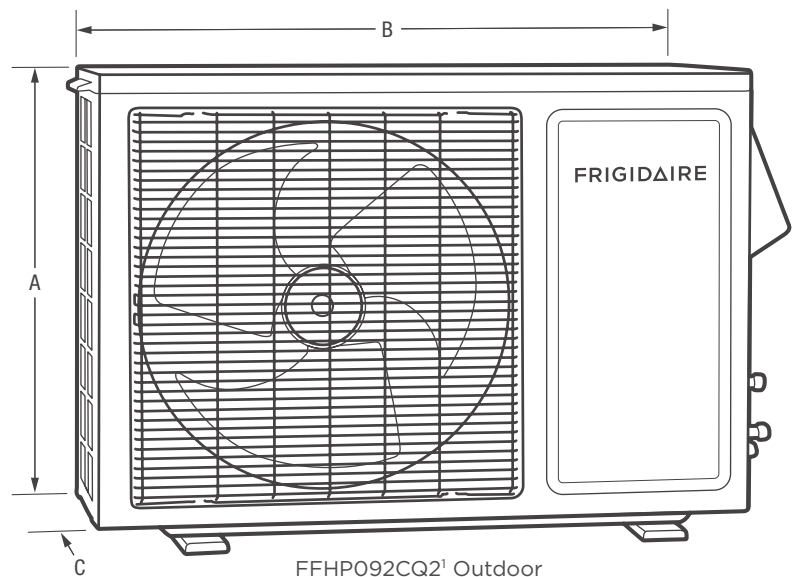

FFHP092CQ2¹ Outdoor

NOTE: For planning purposes only. Always consult local and national electric codes. Refer to Product Installation Guide for detailed installation instructions on the web at frigidaire.com.



Product Dimensions	
Indoor -	
A - Height	10-7/8"
B - Width	33-1/4"
C - Depth	7-1/8"
Outdoor -	
A - Height	21-1/4"
B - Width	33-7/16"
C - Depth	12-5/8"

¹Illustration may not represent actual model.

All refrigeration and electrical work must be performed by a certified and licensed refrigeration technician for parts warranty validation. Insulated line sets and control wires are required and available for Frigidaire split systems in 25 ft. length. Each line set is equipped with flare nuts on both ends. Each system requires one line set for each indoor unit installed.

Accessories information available on the web at frigidaire.com

Ductless Mini-Split System Air Conditioner/Heat Pump Submittal Sheet

FRIGIDAIRE


FFHP092SQ2

Job: _____ Reference: _____ Construction: _____
 Location: _____ Approval: _____ Unit Number: _____
 Engineer: _____ Date: _____ Drawing Number: _____
 Submitted to: _____ Submitted by: _____


Power	
Min Circuit Ampacity	10 A
Maximum Circuit Breaker	15 A
Capacities	
Cooling	9,000 BTU
Cooling Watts	620 W
Min/Max Cooling	3,500 BTU/9,600 BTU
Heatpump Capacity (BTU)	9,800 BTU
HSPF	9.2
Outdoor Sound Rating	52 dB (A)
SEER	22
EER	14.2
Low Ambient Cooling	-5° - 110°F
Low Ambient Heating	
Voltage/Frequency/Phase	230/208/60Hz
Dehumidification	2.5 PT/H

Indoor Unit		FFHP092WQ2
Dimensions (H x W x D)		10-7/8" x 33-1/4" x 7-1/8"
Max. Wall Thickness		18"
Sound Rating		(42) 38/35/32
Net Weight		22 lb
Shipping Weight		29 lb
Fan Motor Load		.2 A
Number of Fan Speeds		4
Fan Type		Cross-flow
RPM at High Speed (cool)		1,100 RPM
Coil Type		aluminum fin & copper tube
Fin Type		coated fin
Pipe Type		copper internal thread
Fin Rows (FPI)		2
Tube Diameter		ϕ 7mm (9/32")
Drain Connection Size		ϕ 6mm (5/8")
Compressor		
Compressor Type		Twin Rotary
Compressor Control		DC Inverter
Compressor Load		7.17 A
Locked Rotor Amps		33 A

Outdoor Unit		FFHP092CQ2
Dimensions (H x W x D)		21-1/4" x 33-7/16" x 12-5/8"
Sound Rating		52 dB (A)
Net Weight		80 lb
Shipping Weight		91 lb
Fan Motor Load		.14 A
Drive Type		inverter
CFM (high)		1,600
Fan Type		Axial-flow
Fan Diameter/Number of Speeds		15-3/4"/2
Number of Poles and RPM		DC/680/900
Coil Type		aluminum fin & copper tube
Fin Type		coated fin
Pipe Type		copper internal thread
Fin Rows (FPI)		2
Tube Size		ϕ 9.52mm (3/8")
Features		
Controls		microprocessor
Remote Control		lcd wireless
Temperature Control		61-86°F (16-30°C)
Timer		24 hr
Air Louvers		2 pieces
Horizontal		manual
Vertical		swing
Low Voltage Restart		built-in
Self-Diagnosis		yes
Air Filter		washable, anti-mold
Refrigerant System		
Refrigerant		R410A
Ounces		45.86
Lineset		25 ft
Maximum Height		16 ft
Maximum Line Length		49 ft
Discharge Vapor Line (od)		6 mm (1/4")
Suction (od)		9 mm (3/8")
Operating Range		
Indoor Air Cooling Intake Temp Range		>= 61°F
Indoor Air Heating Intake Temp Range		<= 86°F
Outdoor Air Cooling Intake Temp Range		-5ϕ 110°F
Outdoor Air Heating Intake Temp Range		-5ϕ 75°F

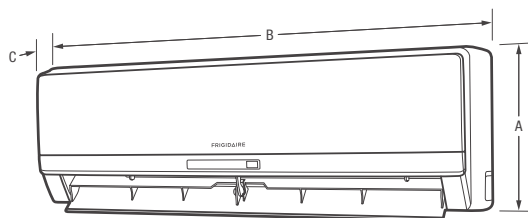

FFHP092WQ2¹ Indoor

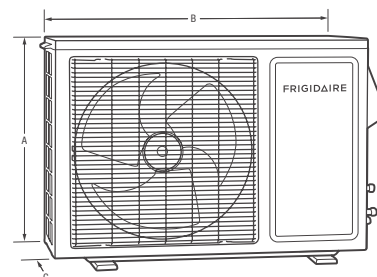

FFHP092CQ2¹ Outdoor

¹Illustration may not represent actual model.

FRIGIDAIRE

USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-800-FRIGIDAIRE • frigidaire.com
 CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4 • 1-800-265-8352 • frigidaire.ca

FFHP092SQ2 02/16

© 2016 Electrolux Home Products, Inc.



Specifications
subject to change.