

Speed Queen® Multi-Housing

Micro Display Commercial Single Load Dryer

Rear Control

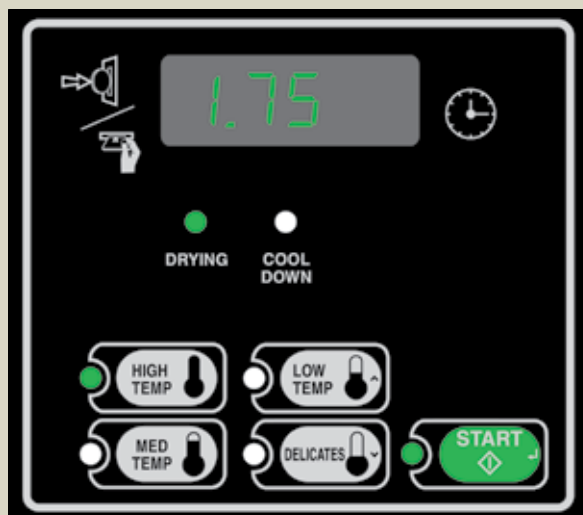


BUILT FOR RELIABLE PERFORMANCE






- Industry's largest door opening 2.06 sq. ft. (1914 cm²)
- Quiet, efficient blower system
- Door is reversible for installation flexibility
- End-of-cycle signal
- High efficiency exhaust blower with superior airflow 220 cfm (105 liters/sec)
- 100% serviceable from the front
- Space-saving narrow cabinet 26-7/8" (683 mm)
- Upfront lint filter easy to clean and secured
- Durable galvanized steel cylinder

MICRO DISPLAY CONTROL

- Easy-to-read digital display
- Touch pad selection combines temperature and cycle
- Manually program and audit
- Card and coin transactions



MICRO DISPLAY COMMERCIAL **SINGLE LOAD DRYER** SPECIFICATIONS

MODELS and ACTIVATION	SDET07WF1500 SDET07WF SDGT09WF	SDEBCRGS171TW02 SDGBCRGS111TW02	SDEY07WF1500 SDEY07WF SDGY09WF	SDEX07WF1500 SDEX07WF SDGX09WF	SDEBXRGS171TW02 SDGBXRGS111TW02
{NOTE: Coin Box Sold Separately}					
	Coin "C"	Coin "C"	Prep Card "Y"	Prep Coin "X"	Prep Coin "X"
Appearance					
Color	White	White	White	White	White
Control Panel Selection	Rear	Rear	Rear	Rear	Rear
Meter Case	Standard	High Capacity	--	Standard	High Capacity
Technical Info					
Cylinder Volume - cu. ft. (liters)	7.0 (198)	7.0 (198)	7.0 (198)	7.0 (198)	7.0 (198)
Cycle Temperature - High, Medium, Low, Delicates					
Motor (Capacitor Start and Thermal Protected) - 1/3 HP					
Weight - lb (kg)	Elec	135 (61)	135 (61)	135 (61)	135 (61)
	Gas	140 (64)	140 (64)	140 (64)	140 (64)
Shipping Weight - lb (kg)	Elec	145 (66)	145 (66)	145 (66)	145 (66)
	Gas	150 (68)	150 (68)	150 (68)	150 (68)
Electrical Requirements	Elec	208/60/1-30 amp 240/60/1-30 amp*	240/60/1-30 amp*	208/60/1-30 amp 240/60/1-30 amp*	208/60/1-30 amp 240/60/1-30 amp*
	Gas	120/60/1-15 amp	120/60/1-15 amp	120/60/1-15 amp	120/60/1-15 amp
Overall Dimensions WxDxH - in (mm):	26 7/8 (683) x 28 (711) x 43 (1092) High Capacity 26 7/8 (683) x 28 (711) x 43 7/8 (1114)				
Type Of Gas (Gas Models Only) Factory-Equipped Natural/Mixed Gas**					
Air Outlet Diameter - in (mm)	4 (102)	4 (102)	4 (102)	4 (102)	4" (102)
Exhaust Airflow - cfm (liters/sec)	220 (105)	220 (105)	220 (105)	220 (105)	220 (105)
Heating Element	Elec	4750W, 208V 5350W, 240V	5350W, 240V	4750W, 208V 5350W, 240V	4750W, 208V 5350W, 240V
	Gas	25,000 Btu	25,000 Btu	25,000 Btu	25,000 Btu
Performance/Features					
Secured Automated Audits	Yes	Yes	Yes	Yes	Yes
Agency Approval	Elec	cULus	cULus	cULus	cULus
	Gas	cCSAus	cCSAus	cCSAus	cCSAus

* Electric dryers come equipped for 240/60/1 operation. They can be field converted to operate on 208/60/1 with optional 61928 conversion kit.

** Gas dryers can be field converted for operation on LP gas with optional 458P3 conversion kit.

For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications subject to change without notice. The quality management system of Alliance Laundry Systems' Ripon facility has been registered to ISO9001:2008.

