

# Speed Queen® Multi-Housing

## Micro Display Commercial Stack Washer/Dryer

Front Control




ENERGY STAR® Certified  
Washer

### BUILT FOR RELIABLE PERFORMANCE





- U.S. DOE compliance for energy and water efficiencies
- ADA compliant (washer only)
- Industry leading 1200 spin speed exerts 440 G-force extraction
- Extra-wide 15.5" door opening and 180° door swing
- Industry's largest door opening 2.06 sq. ft. (1914 cm<sup>2</sup>)
- Quiet, efficient blower system
- End-of-cycle signal
- High efficiency exhaust blower with superior airflow 220 cfm (105 liters/sec)
- 100% serviceable from the front
- Space-saving narrow cabinet 26-7/8" (683 mm)
- Upfront lint filter easy to clean and secured
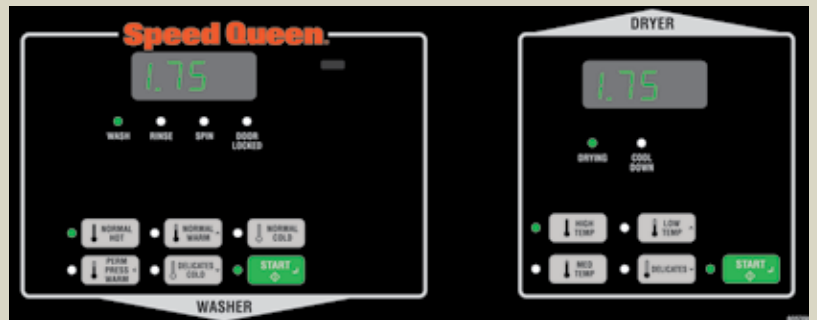
### MICRO DISPLAY CONTROL

- Easy-to-read digital display
- Touch pad selection combines temperature and cycle
- Manually program and audit
- Card and coin transactions



# MICRO DISPLAY **STACK WASHER/DRYER** SPECIFICATIONS


MODELS and ACTIVATION	STEBCASP173TW01 STGBCASP113TW01	STEBYASP173TW01 STGBYASP113TW01	STEBXASP173TW01 STGBXASP113TW01	STGBXASG113TW01
{NOTE: Coin Box Sold Separately}	 Coin "C"	 Prep Card "Y"	 Prep Coin "X"	 Prep Coin "X"
<b>Appearance</b>				
Color	White	White	White	White
Meter Case	High Capacity	High Capacity	High Capacity	High Capacity
<b>Water and Energy Info</b>				
Modified Energy Factor "MEF" ft <sup>3</sup> /kWh/cycle (Liters/kWh/cycle)	2.98 (84.48)	2.98 (84.48)	2.98 (84.48)	2.98 (84.48)
Water Factor "WF" - gal/ft <sup>3</sup> (Liters/Liter/cycle)	3.8 (0.52)	3.8 (0.52)	3.8 (0.52)	3.8 (0.52)
Water Consumption - gal (Liter)	11.7 (44.3)	11.7 (44.3)	11.7 (44.3)	11.7 (44.3)
<b>Technical Info</b>				
Weight - lb (kg)	Elec	390 (177)	390 (177)	390 (177)
	Gas	390 (177)	390 (177)	390 (177)
Shipping Weight - lb (kg)	Elec	425 (192.8)	425 (192.8)	425 (192.8)
	Gas	425 (192.8)	425 (192.8)	425 (192.8)
Overall Dimensions - WxDxH in (mm): 26 7/8 (683) x 27 3/4 (704) x 78 3/16 (1986)				
<b>WASHER</b> - Stainless Steel Basket Volume - cu. ft. (liters): 3.42 (96.8)				
Motor	0.9 HP 671 W	0.9 HP 671 W	0.9 HP 671 W	0.9 HP 671 W
Water Pressure PSI (Bar)	20-120 (1.4-8.3)	20-120 (1.4-8.3)	20-120 (1.4-8.3)	20-120 (1.4-8.3)
Spin Speeds - RPM	500, 800, 1200	500, 800, 1200	500, 800, 1200	500, 800, 1200
Drain	Pump	Pump	Pump	Gravity
Electrical Requirements	120/60/1 15 amp	120/60/1 15 amp	120/60/1 15 amp	120/60/1 15 amp
<b>DRYER</b> - Galvanized Cylinder Volume - cu. ft. (liters): 7.0 (198)				
Air Outlet Diameter - in (mm)	4 (102)	4 (102)	4 (102)	4 (102)
Exhaust Airflow - cfm (liters/sec)	220 (105)	220 (105)	220 (105)	220 (105)
Cycle Temperatures - High, Medium, Low, Delicate, No Heat				
Heating Element	Elec	5350W, 240V	5350W, 240V	5350W, 240V
	Gas	25,000 Btu	25,000 Btu	25,000 Btu
Electrical Requirements	Elec	240/60/1 30 amp*	240/60/1 30 amp*	240/60/1 30 amp*
	Gas	120/60/1 15 amp	120/60/1 15 amp	120/60/1 15 amp
Motor	1/3 HP, 5.5 amps	1/3 HP, 5.5 amps	1/3 HP, 5.5 amps	1/3 HP, 5.5 amps
<b>Performance/Features</b>				
Unit is Factory Assembled Top and Lower Unit	Yes	Yes	Yes	Yes
Agency Approval	Elec	cULus	cULus	cULus
	Gas	cCSAus	cCSAus	cCSAus

**NOTE: Stack washer/dryer requires two power cords. One for washer, one for dryer.**

\* Electric dryers come equipped for 240/60/1 operation. They can be field converted to operate on 208/60/1 with optional 61928 conversion kit.

\*\* Gas dryers can be field converted for operation on LP gas with optional 458P3 conversion kit.

For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications subject to change without notice. The quality management system of Alliance Laundry Systems' Ripon facility has been registered to ISO9001:2008.

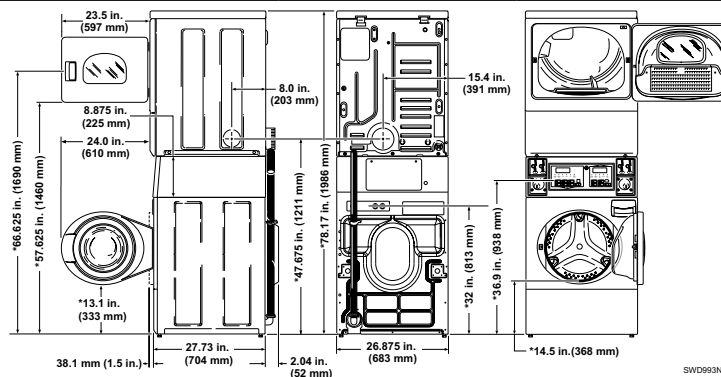

\*With leveling legs turned into base.  
NOTE: Exhaust openings are 10.2 mm (4 inch) metal ducting.

