

# Speed Queen® Multi-Housing

## Micro Display Commercial Front Load Washer

Rear Control



### BUILT FOR RELIABLE PERFORMANCE


- High speed extract of 1200 RPM spins clothes out drier
- U.S. DOE compliance for energy and water efficiencies
- Ultra high efficient with high speed extract and low water consumption
- Commercial-grade stainless steel washtub
- Extra-wide 15.5" door opening and 180° door swing
- Multi-compartment supply dispenser



ENERGY STAR® Certified

### MICRO DISPLAY CONTROL


- Easy-to-read digital display
- Cycle programming flexibility
- Card and coin transactions
- Shows cycle time remaining

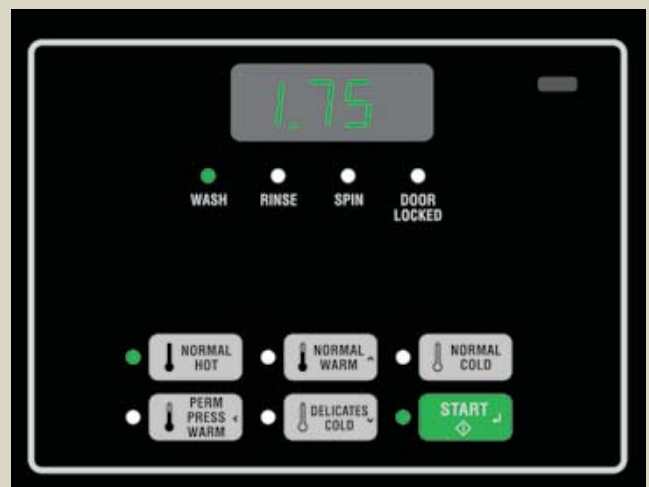

# MICRO DISPLAY COMMERCIAL FRONT LOAD WASHER SPECIFICATIONS

MODELS AND ACTIVATION (NOTE: COIN BOX AND SLIDE SOLD SEPARATELY)	SFNBCRSP113TW01	SFNBCRSP113TW02	SFNBYRSP113TW01	SFNBRSP113TW01	SFNBRSP113TW02
Available Control Location	Rear	Rear	Rear	Rear	Rear
Activation Type	Coin Installed	Coin Installed	Prep for Card	Prep for Coin	Prep for Coin
Meter Case	Standard	High Capacity	--	Standard	High Capacity
Capacity - lb (kg)	21.5 (9.5)	21.5 (9.5)	21.5 (9.5)	21.5 (9.5)	21.5 (9.5)
Cylinder Volume - cu. Ft. (liters)	3.42 (96.8)	3.42 (96.8)	3.42 (96.8)	3.42 (96.8)	3.42 (96.8)
Width - in (mm)	26 7/8 (683)	26 7/8 (683)	26 7/8 (683)	26 7/8 (683)	26 7/8 (683)
Depth - in (mm)	27 3/4 (704)	27 3/4 (704)	27 3/4 (704)	27 3/4 (704)	27 3/4 (704)
Height - in (mm)	43 (1092)	43 7/8 (1114)	43 (1092)	43 (1092)	43 7/8 (1114)
Spin Speed G-Force (RPM)	440 (1200)	440 (1200)	440 (1200)	440 (1200)	440 (1200)
Motor Size (Variable Speed Induction) - HP (kw)	0.9 (0.67)	0.9 (0.67)	0.9 (0.67)	0.9 (0.67)	0.9 (0.67)
Water Consumption per Cycle - g (liter)	11.7 (44.3)	11.7 (44.3)	11.7 (44.3)	11.7 (44.3)	11.7 (44.3)
WF (Water Factor) gal/H³ (Liters/Liter/cycle)	3.8 (0.52)	3.8 (0.52)	3.8 (0.52)	3.8 (0.52)	3.8 (0.52)
MEF (Modified Energy Factor) ft³/kWh/cycle (Liters/kWh/cycle)	2.98 (84.48)	2.98 (84.48)	2.98 (84.48)	2.98 (84.48)	2.98 (84.48)
Available Water Temperatures	Hot, Warm, Cold	Hot, Warm, Cold	Hot, Warm, Cold	Hot, Warm, Cold	Hot, Warm, Cold
Available Cycles	Normal, Perm Press, Del	Normal, Perm Press, Del	Normal, Perm Press, Del	Normal, Perm Press, Del	Normal, Perm Press, Del
Water Pressure - PSI (Bar)	20-120 (1.4/8.3)	20-120 (1.4/8.3)	20-120 (1.4/8.3)	20-120 (1.4/8.3)	20-120 (1.4/8.3)
Cycle Indicator Lights	Yes	Yes	Yes	Yes	Yes
Cylinder Finish	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel
Available Colors	White	White	White	White	White
Available Electrical Requirements (v/Hz/Ph-Amp)	120/60/1 - 15 Amp	120/60/1 - 15 Amp	120/60/1 - 15 Amp	120/60/1 - 15 Amp	120/60/1 - 15 Amp
Net Weight - lb (kg)	253 (115)	253 (115)	253 (115)	253 (115)	253 (115)
Shipping Weight - lb (kg)	273 (124)	273 (124)	273 (124)	273 (124)	273 (124)
Shipping Width - in (mm)	29 (737)	29 (737)	29 (737)	29 (737)	29 (737)
Shipping Depth - in (mm)	32 3/4 (832)	32 3/4 (832)	32 3/4 (832)	32 3/4 (832)	32 3/4 (832)
Shipping Height - in (mm)	45 1/2 (1156)	45 1/2 (1156)	45 1/2 (1156)	45 1/2 (1156)	45 1/2 (1156)
Available Agency Approvals	cULus	cULus	cULus	cULus	cULus

For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications are subject to change without notice. The quality management system of Alliance Laundry Systems' Ripon facility has been registered to ISO 9001:2008. Printed in the USA.

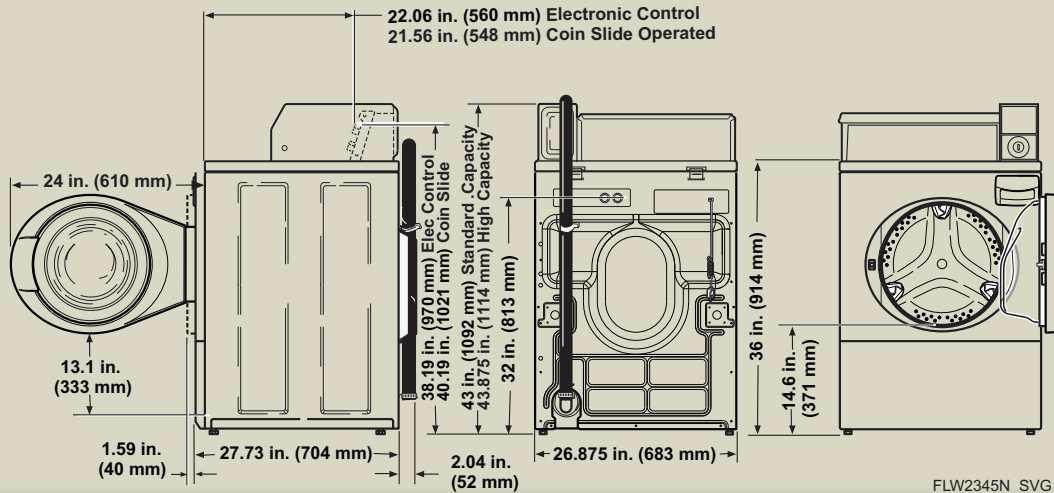

Call us: 800-345-5649

Visit website: [speedqueen.com/route](http://speedqueen.com/route)

© 2016 Alliance Laundry Systems LLC | AM16-0344