

Speed Queen® Multi-Housing

Micro Display Commercial Stack Dryer

Front Control



BUILT FOR RELIABLE PERFORMANCE

- Industry's largest door opening 2.06 sq. ft. (1914 cm²)
- Quiet, efficient blower system
- Door is reversible for installation flexibility
- End-of-cycle signal
- ADA compliant (bottom dryer only)
- High efficiency exhaust blower with superior airflow 220 cfm (105 liters/sec)
- 100% serviceable from the front
- Space-saving narrow cabinet 26-7/8" (683 mm)
- Upfront lint filter easy to clean and secured
- Durable galvanized steel cylinder

MICRO DISPLAY CONTROL

- Easy-to-read digital display
- Touch pad selection combines temperature and cycle
- Manually program and audit
- Card and coin transactions




MICRO DISPLAY COMMERCIAL STACK DRYER SPECIFICATIONS

MODELS AND ACTIVATION {NOTE: COIN BOX SOLD SEPARATELY}	SSEBCAGS151TW01 SSEBCAGS171TW01 SSGBCAGS111TW01	SSEBYAGS151TW01 SSEBYAGS171TW01 SSGBYAGS111TW01	SSEBXAGS171TW01 SSGBXAGS111TW01
Available Control Location	Front	Front	Front
Activation Type	Coin Installed	Prep for Card	Prep for Coin
Capacity - lb (kg)	18 (8.2) ea	18 (8.2) ea	18 (8.2) ea
Cylinder Volume - cu. Ft. (liters)	7.0 (198) ea	7.0 (198) ea	7.0 (198) ea
Width - in (mm)	26 7/8 (683)	26 7/8 (683)	26 7/8 (683)
Depth - in (mm)	28 (711)	28 (711)	28 (711)
Height - in (mm)	78 3/16 (1986)	78 3/16 (1986)	78 3/16 (1986)
Motor Size (Variable Speed Induction) - HP (kw)	1/3 (0.25)	1/3 (0.25)	1/3 (0.25)
Available Heat Sources	Electric or Gas	Electric or Gas	Electric or Gas
Available Heating Element - (Electric)	5350W, 240V 4750W, 208V	5350W, 240V 4750W, 208V	5350W, 240V
Gas Inlet Connection - in (mm)	3/8 (9.5)	3/8 (9.5)	3/8 (9.5)
Gas Consumption - BTU/Hr	25,000	25,000	25,000
Exhaust Outlet Dia. - in (mm)	4 (102)	4 (102)	4 (102)
Exhaust Airflow - cfm (liters/sec)	220 (105)	220 (105)	220 (105)
Available Cycles	High, Medium, Low, Delicates	High, Medium, Low, Delicates	High, Medium, Low, Delicates
Cylinder Finish	Galvanized	Galvanized	Galvanized
Available Colors	White	White	White
Available Electrical Requirements (v/Hz/Ph-Amp)	Elec 240/60/1 30 amp* Elec 208/60/1 30 amp Gas 120/60/1 15 amp	Elec 240/60/1 30 amp* Elec 208/60/1 30 amp Gas 120/60/1 15 amp	Elec 240/60/1 30 amp* Gas 120/60/1 15 amp
Net Weight - lb (kg)	Elec 265 (120) Gas 275 (125)	Elec 265 (120) Gas 275 (125)	Elec 265 (120) Gas 275 (125)
Shipping Weight - lb (kg)	Elec 280 (127) Gas 290 (132)	Elec 280 (127) Gas 290 (132)	Elec 280 (127) Gas 290 (132)
Shipping Width - in (mm)	29 (737)	29 (737)	29 (737)
Shipping Depth - in (mm)	32 3/4 (832)	32 3/4 (832)	32 3/4 (832)
Shipping Height - in (mm)	80 (2032)	80 (2032)	80 (2032)
Available Agency Approvals	Elec cULus Gas cCSAus	Elec cULus Gas cCSAus	Elec cULus Gas cCSAus

NOTE: Each stack dryer pocket requires its own separate power cord.

* Electric dryers come equipped for 240/60/1 operation. They can be field converted to operate on 208/60/1 with optional 61928 conversion kit. Gas dryers can be field converted for operation on LP gas with optional 458P3 conversion kit.

For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications are subject to change without notice. The quality management system of Alliance Laundry Systems' Ripon facility has been registered to ISO 9001:2008. Printed in the USA.

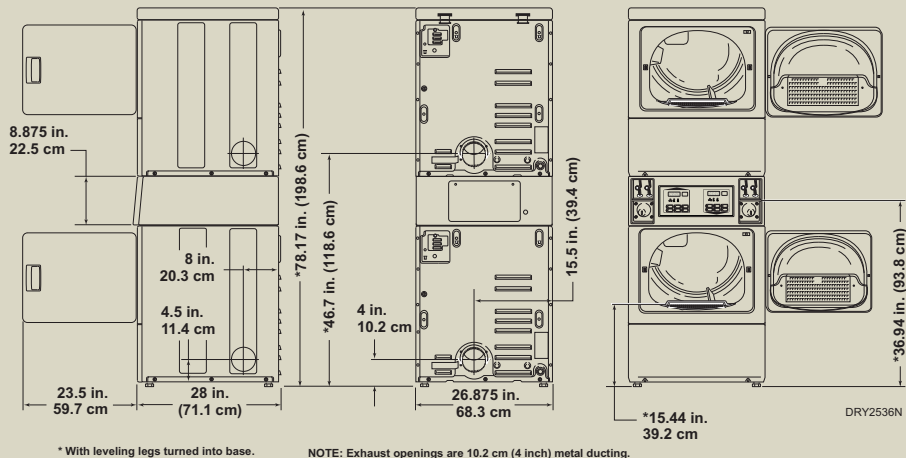

Call us: 800-345-5649

Visit website: speedqueen.com/route

© 2016 Alliance Laundry Systems LLC | AM16-0328