

# Speed Queen® Multi-Housing

## Micro Display Commercial Stack Dryer

Front Control



### BUILT FOR RELIABLE PERFORMANCE




- Industry's largest door opening 2.06 sq. ft. (1914 cm<sup>2</sup>)
- Quiet, efficient blower system
- Door is reversible for installation flexibility
- End-of-cycle signal
- ADA compliant (bottom dryer only)
- High efficiency exhaust blower with superior airflow 220 cfm (105 liters/sec)
- 100% serviceable from the front
- Space-saving narrow cabinet 26-7/8" (683 mm)
- Upfront lint filter easy to clean and secured
- Durable galvanized steel cylinder

### MICRO DISPLAY CONTROL

- Easy-to-read digital display
- Touch pad selection combines temperature and cycle
- Manually program and audit
- Card and coin transactions



# MICRO DISPLAY COMMERCIAL **STACK DRYER** SPECIFICATIONS


| MODELS and ACTIVATION<br><br>{NOTE: Coin Box Sold Separately}                | SSEBCAGS151TW01<br>SSEBCAGS171TW01<br>SSGBCAGS111TW01   | SSEBYAGS151TW01<br>SSEBYAGS171TW01<br>SSGBYAGS111TW01  | SSEBXAGS171TW01<br>SSGBXAGS111TW01   |                   |
|--|---|--|--|-------------------|
|  | <br>Coin "C" | <br>Prep Card "Y" | <br>Prep Coin "X" |                   |
| <b>Appearance</b>  |   |  |  |                   |
| Color  | White   | White  | White  |                   |
| Control Panel Selection  | Front   | Front  | Front  |                   |
| Meter Case   | High Capacity   | --   | High Capacity  |                   |
| Solid Door (no window)   | Yes   | Yes  | Yes  |                   |
| <b>Technical Info</b>  |   |  |  |                   |
| Cylinder Volume cu. ft. (liters)   | 7.0 (198) (ea)  | 7.0 (198) (ea)   | 7.0 (198) (ea)   |                   |
| Cycle Temperature - High, Low, Medium, Delicates                             |   |  |  |                   |
| Motor (Capacitor Start and Thermal Protected) - 1/3 HP                       |   |  |  |                   |
| Weight - lb (kg)   | Elec  | 265 (120)  | 265 (120)  | 265 (120)         |
|  | Gas   | 275 (125)  | 275 (125)  | 275 (125)         |
| Shipping Weight - lb (kg)  | Elec  | 280 (127)  | 280 (127)  | 280 (127)         |
|  | Gas   | 290 (132)  | 290 (132)  | 290 (132)         |
| Electrical Requirements (ea)   | Elec  | 208/60/1-30 amp<br>240/60/1-30 amp*  | 208/60/1-30 amp<br>240/60/1-30 amp*  | 240/60/1-30 amp*  |
|  | Gas   | 120/60/1-15 amp  | 120/60/1-15 amp  | 120/60/1-15 amp   |
| Overall Dimensions - WxDxH in (mm): 26 7/8 (683) x 29 (737) x 78 3/16 (1986) |   |  |  |                   |
| Type Of Gas (Gas Models Only) ** Factory-Equipped Natural/Mixed Gas          |   |  |  |                   |
| Air Outlet Diameter - in (mm)  | 4 (102)   | 4 (102)  | 4 (102)  |                   |
| Exhaust Airflow cfm (liters/sec)   | 220 (105)   | 220 (105)  | 220 (105)  |                   |
| Heating Element (ea)   | Elec  | 4750W, 208V<br>5350W, 240V   | 4750W, 208V<br>5350W, 240V   | --<br>5350W, 240V |
|  | Gas   | 25,000 Btu   | 25,000 Btu   | 25,000 Btu        |
| <b>Performance/Features</b>  |   |  |  |                   |
| Cycle Status Indicators  | Yes   | Yes  | Yes  |                   |
| Touch Pad Control with Sound Annunciator                                     | Yes   | Yes  | Yes  |                   |
| Agency Approval  | Elec  | cULus  | cULus  | cULus             |
|  | Gas   | cCSAus   | cCSAus   | cCSAus            |

**NOTE: Each stack dryer pocket requires its own separate power cord.**

\* Electric dryers come equipped for 240/60/1 operation. They can be field converted to operate on 208/60/1 with optional 61928 conversion kit.

\*\* Gas dryers can be field converted for operation on LP gas with optional 458P3 conversion kit.

For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications subject to change without notice. The quality management system of Alliance Laundry Systems' Ripon facility has been registered to ISO9001:2008.

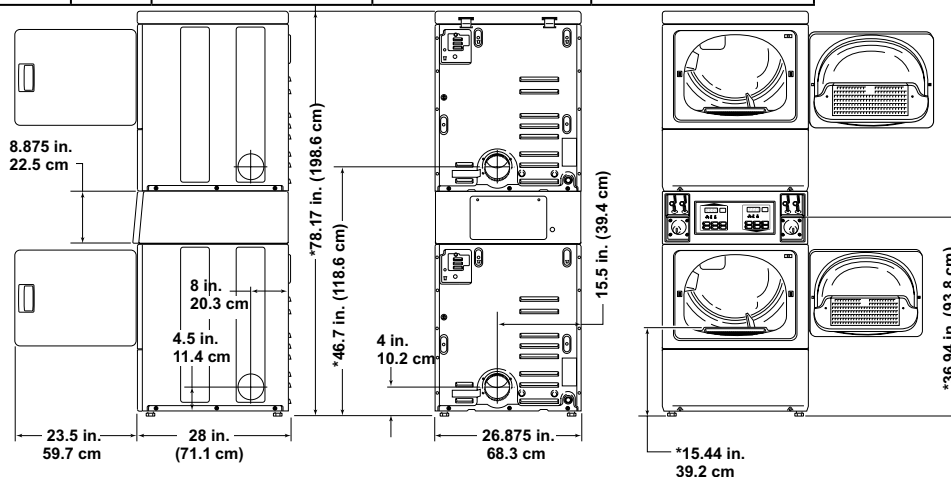

\* With leveling legs turned into base.  
NOTE: Exhaust openings are 10.2 cm (4 inch) metal ducting.

DRY2536N

