

Speed Queen® Multi-Housing

Micro Display Commercial Single Load Dryer

Front Control



BUILT FOR RELIABLE PERFORMANCE




- Industry's largest door opening 2.06 sq. ft. (1914 cm²)
- Quiet, efficient blower system
- Door is reversible for installation flexibility
- End-of-cycle signal
- ADA compliant
- High efficiency exhaust blower with superior airflow 220 cfm (105 liters/sec)
- 100% serviceable from the front
- Space-saving narrow cabinet 26-7/8" (683 mm)
- Upfront lint filter easy to clean and secured
- Durable galvanized steel cylinder

MICRO DISPLAY CONTROL

- Easy-to-read digital display
- Touch pad selection combines temperature and cycle
- Manually program and audit
- Card and coin transactions




MICRO DISPLAY COMMERCIAL **SINGLE LOAD DRYER** SPECIFICATIONS

MODELS and ACTIVATION {NOTE: Coin Box Sold Separately}	SDEBCAGS171TW01 SDGBCAGS111TW01  Coin "C"	SDGBYAGS111TW01  Prep Card "Y"	SDEBXAGS171TW01 SDGBXAGS111TW01  Prep Coin "X"
Appearance			
Color	White	White	White
Control Panel Selection	Front	Front	Front
Meter Case	High Capacity	--	High Capacity
Technical Info			
Cylinder Volume cu. ft. (liters)	7.0 (198)	7.0 (198)	7.0 (198)
Cycle Temperature - High, Low, Medium, Delicates			
Motor (Capacitor Start and Thermal Protected) - 1/3 HP			
Weight - lb (kg)	Elec	150 (68)	150 (68)
	Gas	155 (70)	155 (70)
Shipping Weight - lb (kg)	Elec	160 (73)	160 (73)
	Gas	165 (75)	165 (75)
Electrical Requirements	Elec	240/60/1-30 amp*	240/60/1-30 amp*
	Gas	120/60/1-15 amp	120/60/1-15 amp
Overall Dimensions - WxDxH in (mm): 26 7/8 (683) x 28 (711) x 44 3/8 (1126)			
Type Of Gas (Gas Models Only) ** Factory-Equipped Natural/Mixed Gas			
Air Outlet Diameter - in (mm)	4 (102)	4 (102)	4 (102)
Exhaust Airflow cfm (liters/sec)	220 (105)	220 (105)	220 (105)
Heating Element	Elec	5350W, 240V	5350W, 240V
	Gas	25,000 Btu	25,000 Btu
Performance/Features			
Cycle Status Indicators	Yes	Yes	Yes
Touch Pad Control with Sound Annunciator	Yes	Yes	Yes
Agency Approval	Elec	cULus	cULus
	Gas	cCSAus	cCSAus

* Electric dryers come equipped for 240/60/1 operation. They can be field converted to operate on 208/60/1 with optional 61928 conversion kit.

** Gas dryers can be field converted for operation on LP gas with optional 458P3 conversion kit.

For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications subject to change without notice. The quality management system of Alliance Laundry Systems' Ripon facility has been registered to ISO9001:2008.

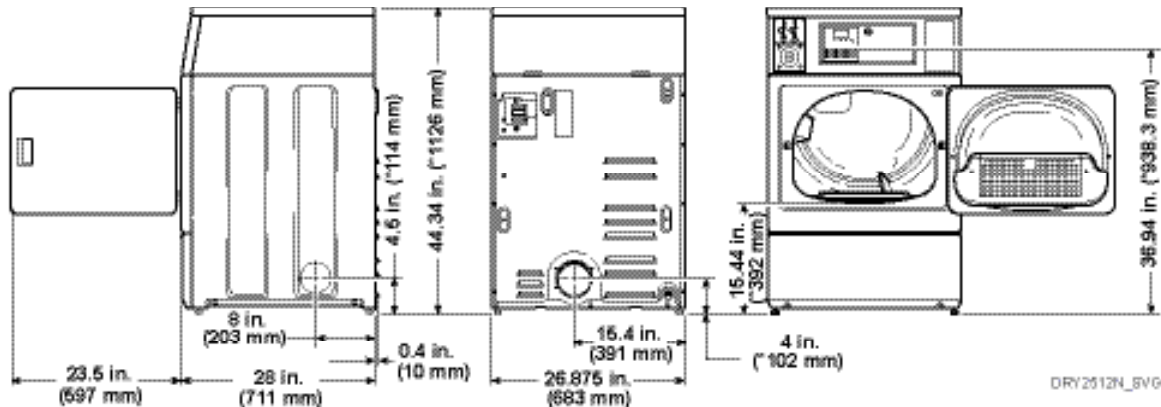

*With leveling legs turned into base.

NOTE: Exhaust openings are 102 mm (4 inch) metal ducting

DRY2012N_BVG

