
Fisher&Paykel

#24478

RF170A French door Surround Kit



Cutout dimensions – flush to edge of door (mm / inches)

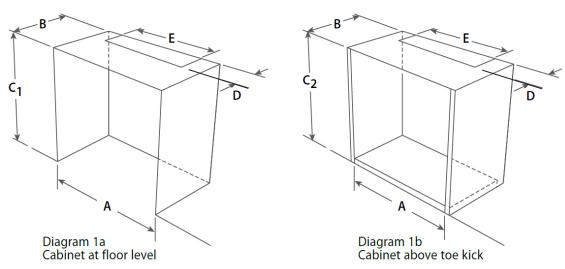

Installation	diagrams	for illustratio	n purposes or	ıly

Diagram 1

Α	width	962 (37%")	_ 2
В	depth*	700 (27 %16")	D °
c_1	height**	1790 (70 1/2")	_ 2
C_2	height***	1806 (71 1/8")	E v

D	air vent depth	200 (8")
Е	air vent	657 (25 7/8")


^{*} Depth is a minimum requirement

N.B. The trim kit must be supported (in a module cabinet) independently from the adjoining cabinets

^{**} Height is without 16mm MDF packer

^{***} Height is with 16mm MDF packer

Fisher&Paykel



Cut Out Dimensions			
Width A	Depth B*	Height C**	
962mm	700mm	1790mm	
377/8"	27 ⁹ /16"	701/2"	


- * Depth is a minimum requirement
- **Height is without 16mm MDF packer

TRIM INSTALLATION

The bottom trim is designed to cover the front edge of the floor base panel of the cabinet. This trim can be installed on a raised toe kick (diagram 1a) or toe kick below the refrigerator (diagram 1b)

Remembering that if this trim is to be used with the refrigerator at floor level the cut out dimensions will need to have 16mm (5/8") added to its height to allow for the bottom trim to be fitted. Note this trim is optional on this type of installation. If used with a raised toe kick the 16mm packer should be part of the base (diagram 5). Therefore 16mm is not required to be added to the height dimension.

- 1. If used place the 16mm (5/8") piece of plywood or with bottom trim fitted into the cavity (diagram 5 or 6). Note the piece should be the same size as the base of the cavity.
- 2. Remove protective coating film from surround trim.
- 3. To install the surrounds, first clip in the top surround. Ensure the locator strips at the rear of the top brackets clip into the rear of the top trim.
- 4. Clip both side trims into place starting from the front cabinet edge.

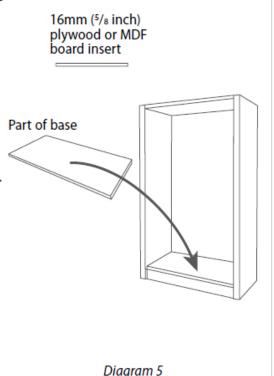

Fisher&Paykel

