

## Freestanding Range

FFGF3024SS

30" Gas



### Quick Clean

Quickly clean your oven in two hours with our quick self-clean cycle.

### Quick Bake Convection

Bake faster and more evenly with Quick Bake Convection.

### Continuous Corner-to-Corner Grates

Move heavy pots & pans without lifting with continuous, corner-to-corner grates.

### Quick Boil

Get meals on the table faster with our 16,000 BTU burner—water boils faster than the traditional setting.

### Product Dimensions

Height (Max.)	46-5/8"
Width	29-7/8"
Depth (Including Handle)	29-1/4"

### More Easy-To-Use Features

#### Large Capacity

Our large capacity oven gives you room to cook more dishes at once.

#### Ready-Select® Controls

Easily control your cooking temperature with our easy-to-use controls.

#### Sealed Gas Burners

Enjoy easier cleanup and a burner that stays looking great.

#### Store-More™ Storage Drawer

With our Store-More™ storage drawer, you will have extra space to store your cookware.

#### Delay Clean

Set the oven to begin cleaning on your schedule.

#### Low Simmer Burner

Perfect for cooking delicate foods and sauces.

#### Delay Start Baking Option

Set your oven to begin cooking on your schedule. It can be programmed from one to 24 hours.

#### Hi/Lo Broil Option

Offers two-position broiling and variable temperature control for more control.

#### Extra-Large Window

Our extra-large oven window lets you easily see what's inside.


#### Available in:



Stainless  
(S)

Burners	BTU
Right Front	16,000
Right Rear	5,000
Left Front	9,500
Left Rear	12,000

Features	
Oven Control/Timing System	Ready-Select® Controls
Surface Type	Black Porcelain
Sealed Gas Burners	Yes
Grates	Continuous Cast Iron w/ Black Matte Finish
Window	Extra-Large
Exterior Door Finish	Stainless Steel
Handle Design	Stainless Steel
Exterior Finish (Side Panels)	Black
Convection System	Quick Bake Convection
Oven Cleaning System	Self Clean
Drawer Functionality	Storage
Oven Controls	
Bake	Yes
Broil	Hi/Low
Quick Bake Convection	Yes
Add-a-Minute	
Delay Start	Yes
Self-Clean	Yes
Quick Clean Option	Yes
Delay Clean	2, 3 Hours
Kitchen Timer	Yes
Timed Cook Option	Yes
Auto Oven Shut-Off	12 Hours
Oven Lock-Out	Yes
Cooktop Features	
Right Front Burner (BTU)	16,000
Right Rear Burner (BTU)	5,000
Left Front Burner (BTU)	9,500
Left Rear Burner (BTU)	12,000
Center Extra Zone Burner (BTU)	
Oven Features	
Capacity (Cu. Ft.)	5.0
Oven Light	1
Hidden Bake Element	Yes
Rack Configuration	2 Standard
Baking System	
Broiling System	Vari-Broil™ Hi/Lo
Bake Burner/Broil Burner (BTU)	18,000/13,500
Optional Accessories	
LP Gas Conversion Kit	PN# GRLP4
Specifications	
Oven Interior (H x W x D)	18-5/8" x 24-3/8" x 19-1/8"
Power Supply Connection Location	Left Bottom Rear
Gas Supply Connection Location	Right Bottom Rear
Voltage Rating	120V / 60 Hz / 12A
Amps @ 120 Volts	12
Shipping Weight (Approx.)	195 Lbs.

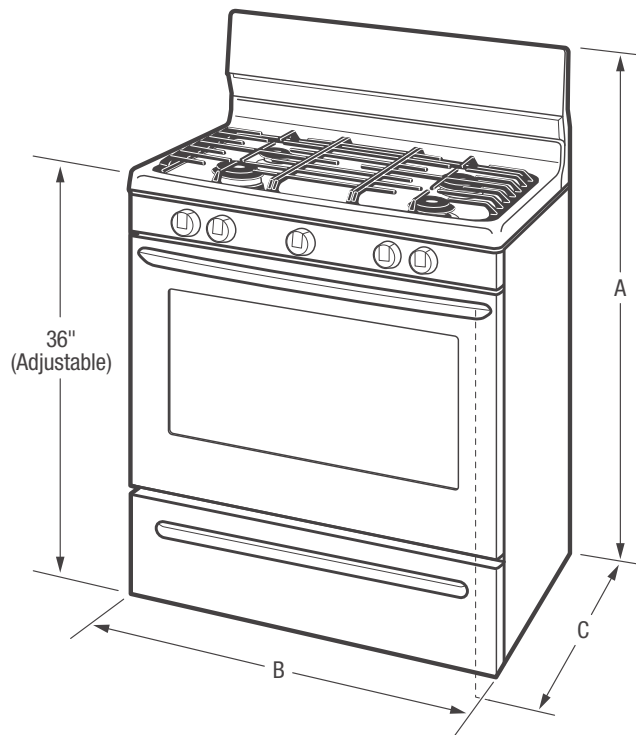


NOTE: For planning purposes only. Always consult local and national electric and gas codes. Refer to Product Installation Guide for detailed installation instructions on the web at [frigidaire.com](http://frigidaire.com).



Product Dimensions		Cabinet Cutout Dimensions	
A - Height (Max.)	46-5/8"	Height (Standard)	36"
B - Width	29-7/8"	Width (Min.)	30"
C - Depth (Including Handle)	29-1/4"	Depth (Min.)	24"
Depth with Door Open 90°	46-9/16"		

Accessories information available on the web at [frigidaire.com](http://frigidaire.com)

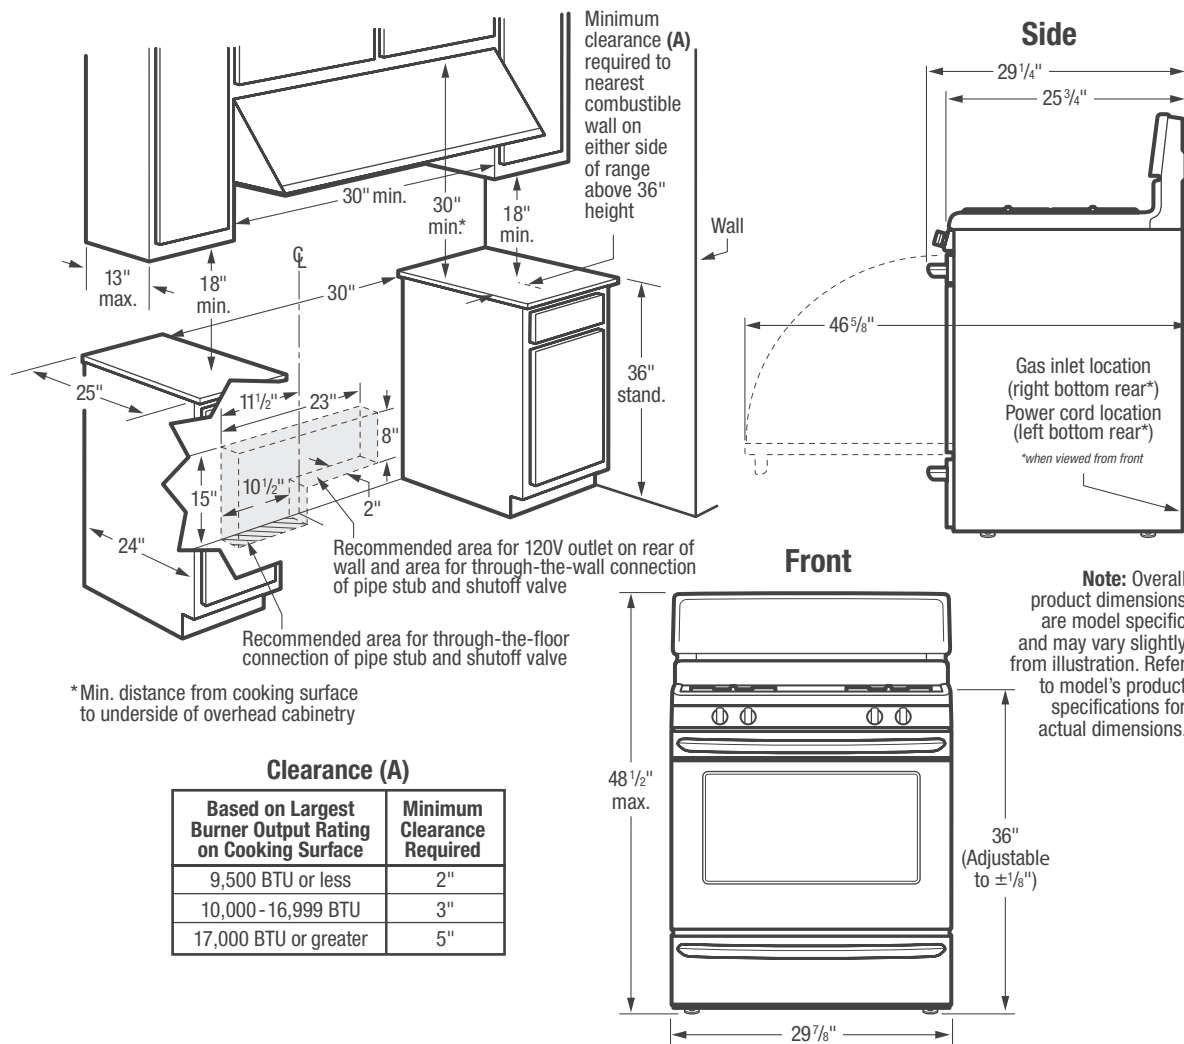

### Freestanding Range Specifications

- Product Shipping Weight (approx.) - 195 Lbs.
- Voltage Rating - 120V/60 Hz/12 Amps
- Amps @ 120 Volts = 12 Amps
- Always consult local and national electric and gas codes.
- Make sure wall coverings around range can withstand heat generated by range.
- Linoleum or any other synthetic floor covering located beneath range, must be capable of withstanding minimum heat of 90°F above room temperature without shrinking, warping or discoloring. Insulating pad or 1/4"-thick plywood required between range and a carpeted floor.
- Do not obstruct flow of combustion air at oven vent nor around base or beneath lower front panel of range. Range requires fresh air for proper burner combustion.
- Do not install range beneath any downward-blowing, overhead vent hood or air curtain.
- Range ships with 3/4" factory regulator.
- Range is LP Gas convertible. (Optional LP Gas Conversion Kit available.)
- Floor beneath range MUST be solid and level.

- Overhead cabinetry should not exceed a 13" maximum depth.
- Absolute minimum horizontal distance between overhead cabinets installed to either side of appliance must be no less than maximum width of appliance.
- Range can be installed flush to wall with 0" minimum rear clearance.
- Minimum clearance required (from edge of rangetop to nearest combustible wall on either side of range above 36" height) is based on largest burner output rating on cooking surface.
- To reduce risk of fire when using overhead cabinetry, install range hood that projects horizontally a recommended minimum of 5" beyond bottom of cabinets.
- Follow all dimension requirements provided to prevent property damage, potential fire hazard, and incorrect countertop and cabinet cuts.

**Note:** For planning purposes only. Refer to Product Installation Guide on the web at [frigidaire.com](http://frigidaire.com) for detailed instructions.

### Optional Accessories

- LP Gas Conversion Kit - (PN# GRLP4).