

PURCHASER	P.O. #	DATE
PROJECT	LOCATION	
ENGINEER	ARCHITECT	
SUBMITTED BY	FOR APPROVAL	FOR REFERENCE

ITEM	PLAN DESIGNATION	QUANTITY	COOLING BTU/H	VOLTAGE	FRIEDRICH MODEL

### Comfort & convenience

- Rotary compressors provide quiet, dependable performance
- Six-way air flow control
- Stale air exhaust
- Auto restart
- Washable/reusable filter
- Seacoast protection
- Zero Ozone Depletion Refrigerants
- NEW R32 refrigerant with low Global Warming Potential (select models)


### Digital control features

- 12 hr. programmable timer
- Money Saver® setting saves money by conserving energy



### Accessories (Wall sleeve is required)

USC Wall Sleeve	Qty	
UXAA Architectural Grille	Qty	

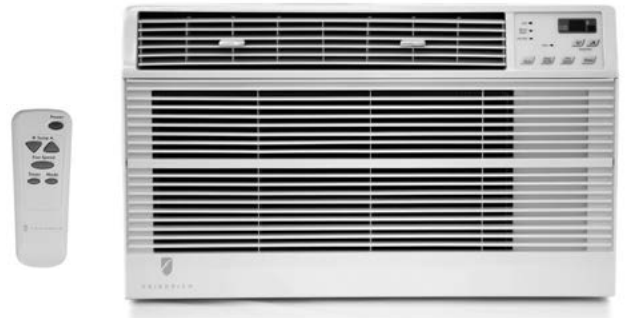

## DIFFERENT BRAND? NO PROBLEM UNI-FIT® INSTALLS IN MANY EXISTING SLEEVES

Sleeve Dimensions	Friedrich USC Sleeve	Amana	Carrier (51S Series)	Fedders/ Emerson/ Friedrich WSE	Emerson/ Fedders	GE/ Hotpoint	Whirlpool	White-Westinghouse/ Frigidaire/ Carrier (52F Series)
Height (inches)	15 1/2	15 5/8	16 7/8	16 3/4	15 3/4	15 5/8	16 1/2	15 1/4
Width (inches)	25 7/8	26	25 3/4	27	26 3/4	26	25 7/8	25 1/2
Depth (inches)	16 3/4	16 7/8	18 5/8	16 3/4 or 19 3/4	15	16 7/8	17 1/8 or 23	16, 17 1/2 or 22

# SPECIFICATIONS

★ ENERGY STAR® models

Model	Cooling Btu	Heating Btu	Volts Rated	Cooling Amps	Cooling Watts	Heating Amps	Heating Watts	EER	CEER	Estimated Yearly Energy Cost	Moisture Removal Pints/Hr	Refrigerant	CFM	Sleeve	Net Weight Lbs	Ship Weight Lbs
<b>UNI-FIT®</b>																
<b>Cool Only</b>																
★ US08D10C	8000	—	115	7.0	750	—	—	10.7	10.6	\$68	2.2	R32	260	USC	65	75
★ US10D10C	9800	—	115	8.5	920	—	—	10.7	10.6	\$83	3.2	R32	260	USC	78	84
★ US12D10C	11800	—	115	10.2	1110	—	—	10.6	10.5	\$99	3.8	R32	290	USC	80	87
★ US10D30C	9800/9500	—	230/208	4.2/4.5	920/890	—	—	10.7/10.7	10.6/10.6	\$83	3.2	R32	285	USC	78	86
★ US12D30C	11800/11500	—	230/208	5.0/5.5	1110/1080	—	—	10.6/10.6	10.5/10.5	\$100	3.8	R32	290	USC	80	87
<b>Cool with Electric Heat</b>																
UE08D11D	8000	3850	115	7.4	810	10.7	1230	9.8	9.7	\$73	2.2	R410A	260	USC	73	79
UE10D33D	10000/9800	11200/9200	230/208	4.7/5.1	1020/1000	15.3/14.0	3500/2900	9.8/9.8	9.7/9.7	\$92	3.2	R410A	285	USC	78	84
UE12D33D	11200/11000	11200/9200	230/208	5.2/5.6	1140/1112	15.3/14.0	3500/2900	9.8/9.8	9.7/9.7	\$103	3.8	R410A	290	USC	80	87

Due to continuing research in new energy-saving technology, specifications are subject to change without notice.

As an ENERGY STAR® partner, Friedrich Air Conditioning Co. has determined that the selected ENERGY STAR® models meet the ENERGY STAR® guidelines for energy efficiency.

EER is the unit's Energy Efficiency Ratio; CEER is the unit's Combined Energy Efficiency Ratio.

Your energy costs will depend on your utility rates and use. The estimated energy cost is based on a electricity cost of \$ .12 per kWh.

For more information, visit [www.ftc.gov/energy](http://www.ftc.gov/energy).



Trim Ring


## PLUG FACE/CIRCUIT RATING

Uni-Fit® Model Number	Circuit Rating Breaker or T-D Fuse	Plug Face [NEMA#]	Power Cord Length [ft.]	Wall Outlet Appearance
US08D10C, UE08D11C US10D10C, US12D10C	125V - 15A	5 - 15P	6	
US10D30C, US12D30C	250V - 15A	6 - 15P	6	
UE10D33C, UE12D33C	250V - 20A	6 - 20P	4	

Power cords are located on front right of Uni-Fit models.

### IMPORTANT:

US and UE chassis w/ front fully installed into USC sleeve extends into the room as shown at right **A**.

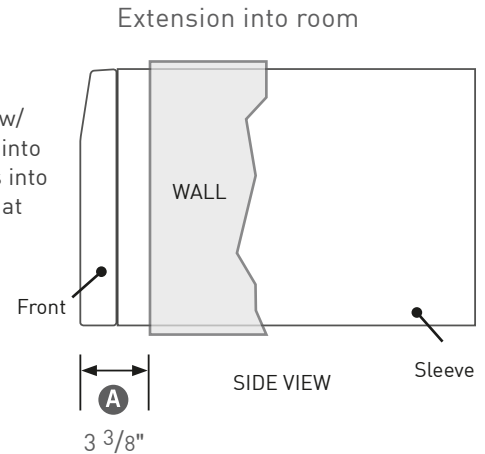

## SLEEVE/CHASSIS DIMENSIONS

Model	Height	Width	Depth	Depth with Front Extension Into Room	Minimum Extension Outside	Thru-the-wall Finished Hole			
						Height	Width	Max. Depth	
<b>Uni-Fit®</b>									
USC Sleeve	15 1/2"	25 7/8"	16 3/4"	20 1/2"	—	1/2"	15 3/4"	26 1/8"	16 1/4"
US, UE Chassis	14 3/8"	24"	18 1/2"	20 1/8"	3 3/4"	—	—	—	—

Model	Carton Dimensions INCHES		
	Height	Width	Depth
<b>Uni-Fit®</b>			
USC Sleeve	17 7/8"	28"	19 1/4"
US Chassis	17 1/4"	27 3/4"	22 1/4"
UE Chassis	17 1/4"	27 3/4"	22 1/4"

