

# RB 1410 Premium BioFresh

## 24" Built-In Refrigerator

The stainless front RB 1410 is packed with features and limitless design options. Enjoy the large capacity and the convenience of the full refrigeration tower with LED lighting, touch control system and BioFresh drawers.

This unit preserves your produce and meats up to three times longer with Liebherr's patented BioFresh technology



Right Appliance



LED Light in BioFresh Compartment



Variable bottle rack






|   |                                  |
|---|----------------------------------|
| <b>Capacity</b>   |                                  |
| Total   | 398 liters /13.8 cu. ft.         |
| Refrigerator Compartment  | 246 liters /8.7 cu. ft.          |
| BioFresh Compartment  | 117 liters / 4.1 cu. ft.         |
| Energy Star   | Yes                              |
| Energy consumption per year   | 295 KWH/Y                        |
| Estimated yearly Energy Cost  | \$35 USD *                       |
| Climate rating  | SN-T 10°C to 43°C(50°F to 110°F) |
| Power   | 115v at 60hz 2.5 amps / 300 watt |
| Shipping Weight   | 231 lbs. / 105 kg                |
| <b>Refrigerator Compartment</b>   |                                  |
| Refrigerator Door   | Right Hand Reversible            |
| Interior light  | LED Side                         |
| Forced air fan system   | Quiet DC fan                     |
| VarioBox  | Clear Plastic Covered Door Shelf |
| Gallon storage door shelf   | 1                                |
| Adjustable Glass Door shelves   | 2                                |
| Glass Shelves Adjustable  | 5                                |
| Bottle shelf  | Yes                              |
| BioFresh Drawers  | 3 Clear Plastic                  |
| *Your Energy Costs will depend on your utility rates and use. Estimated energy cost based on a national average electricity cost of 12 cents per KWh. |                                  |
| Optional top vent grill available 24"or 48"   |                                  |
| Single install kit required for 24"   |                                  |
| SBS install kit required for 48"  |                                  |


THIS IS A QUICK REFERENCE GUIDE FOR **RB 1410**, FOR COMPLETE INSTRUCTIONS, PLEASE REFER TO THE DESIGN GUIDE OR VISIT <http://www.liebherr-appliances.com>

## Unit Dimensions:

## Ventilation Requirements

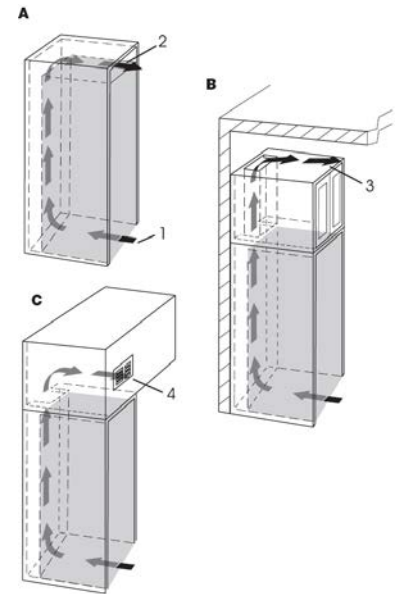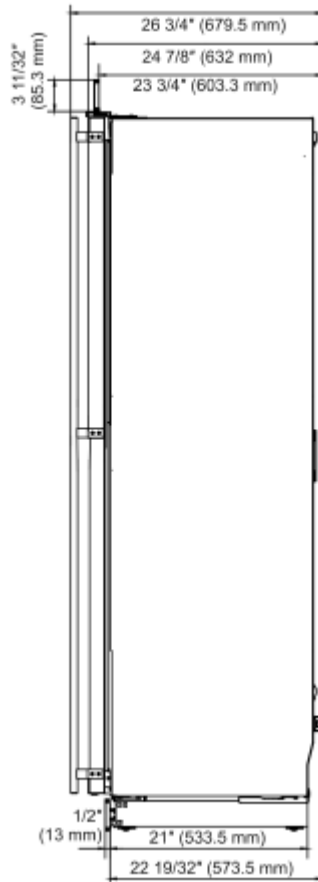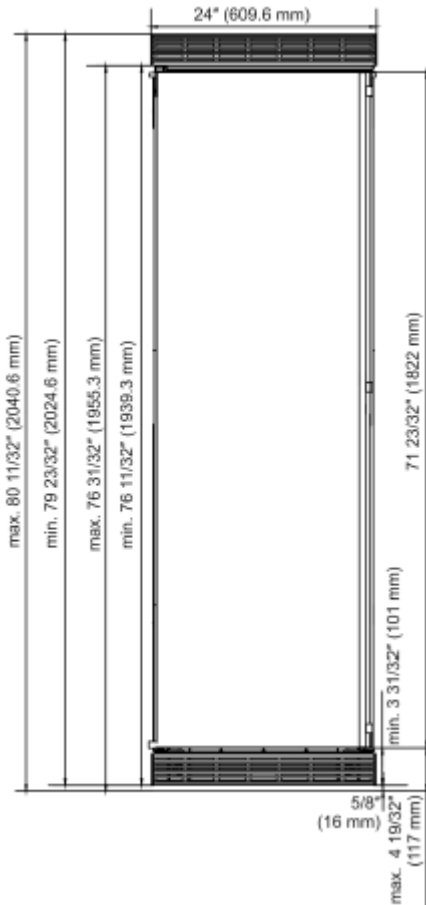

## Cabinet Opening Dimensions

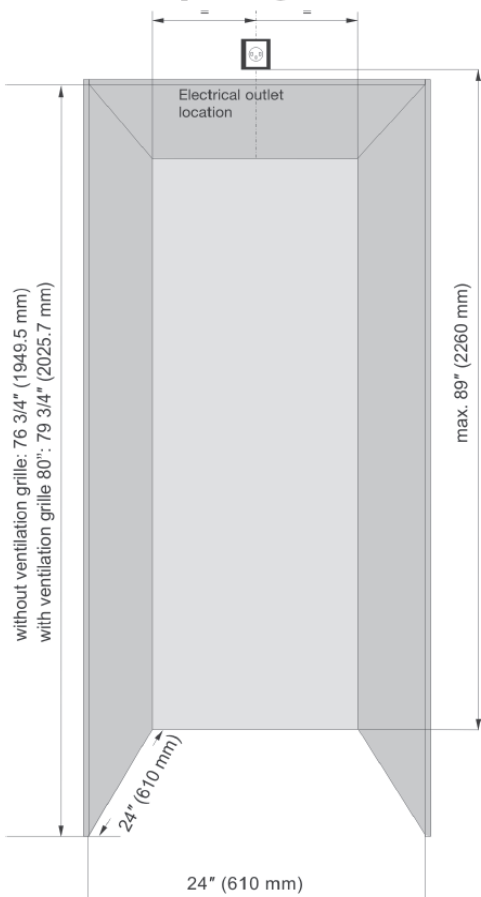

„This is a built-in refrigerator-freezer with either custom finished door panels or stainless steel doors. The unit is not intended for freestanding use and has to be installed inside a cabinet. This type of cabinet must be carefully constructed using the proper dimensions and it must provide proper ventilation to ensure proper appliance operation.

### Kitchen Cabinet Airflow

1. The following ventilation dimensions must be observed:

There must be a ventilation space at least 31 in.<sup>2</sup> (200 cm<sup>2</sup>) at the airflow inlet (1) and at the airflow outlet (2).

The top ventilation space can be directed in one of the following ways:

- A) Directly over the appliance (2) with an optional factory air vent.
- B) Above the cabinet and below the ceiling (3).
- C) Through a vent installed in a soffit (4).

All units are to open at a minimum of 90° to prevent problems removing drawers. With the door opening 90°, you may have to move drawers slightly to clear the door interior.

- Use a minimum 2" (51 mm) filler, for corner installations, so the door can be opened to 90°. If you're using raised panels, consider using a wider filler.
- Use the supplied filler strip when units are installed side by side.

### IMPORTANT

Refer to the minimum door clearances and illustrations at the end of this section for details on door openings and filler size alternatives.

### NOTE:

The given cabinet opening height dimension includes top air vent. If you choose to place the vent above the cabinet or in a soffit, you will need to adjust the height dimension accordingly.

