





Wolf Design Guide




Microwave Ovens

24" DRAWER MICROWAVE

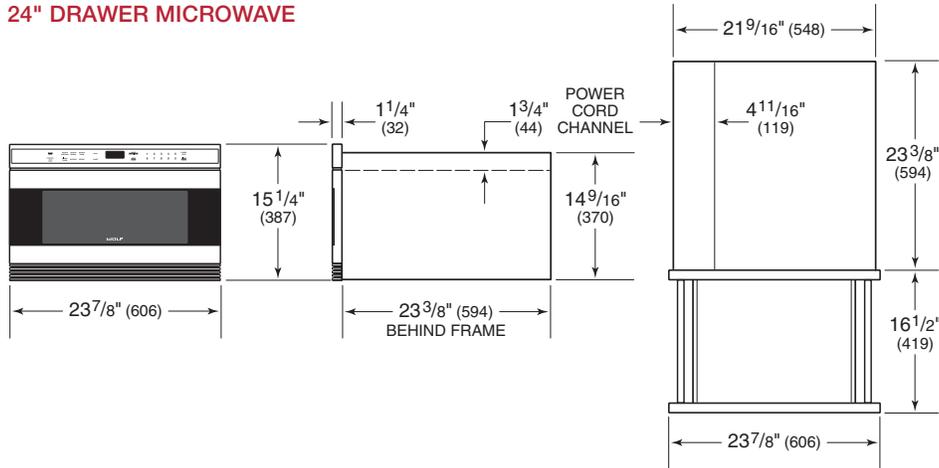

30" DRAWER MICROWAVE

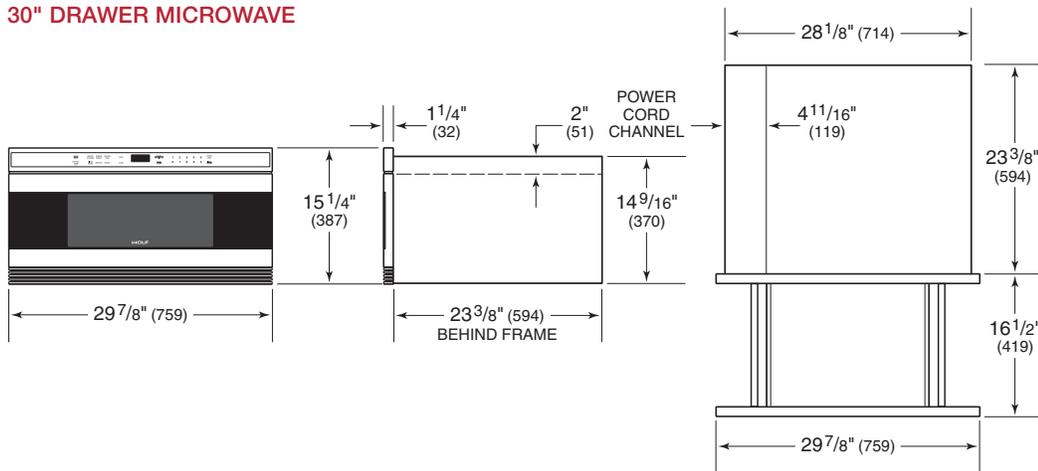

MICROWAVE OVENS

INTERIOR CAPACITY	CU FT (L)
Drawer	1.0 (28)
Convection	1.5 (42)
Standard	2.0 (57)

INTERIOR DIMENSIONS	W	H	D
Convection	17 ³ / ₈ " (441)	5 ⁷ / ₈ " (149)	17 ¹ / ₈ " (435)
Convection	16 ¹ / ₈ " (410)	9 ⁵ / ₈ " (244)	16 ¹ / ₈ " (410)
Standard	17 ³ / ₈ " (441)	10 ¹ / ₂ " (267)	18 ⁵ / ₈ " (473)

Planning Information

Wolf drawer microwaves can be installed in a standard or flush inset application. Refer to the illustrations on the following pages for minimum cabinet dimensions for your specific installation. The cabinet must be able to support 125 lbs (57 kg).

Wolf convection and standard microwaves can be used freestanding or built-in with optional trim kit, available through your authorized Wolf dealer. For local dealer information, visit the find a showroom section of our website, wolfappliance.com.

In a freestanding application, allow 2" (51) of airflow space on the top, rear and both sides. Built-in opening dimensions accommodate air flow space.

In a built-in application, convection, standard and drawer microwaves will overlap stiles and rails. Refer to the chart below for trim overlaps.


MICROWAVE TRIM OVERLAP		
DRAWER MICROWAVE	24" MODEL	30" MODEL
Top	3/8" (10)	3/8" (10)
Bottom	1/8" (3)	1/8" (3)
Sides	7/8" (22)	3/4" (19)
27" E SERIES TRIM	CONVECTION	STANDARD
Top	1/4" (6)	9/16" (14)
Bottom	3/4" (19)	11/16" (17)
Sides	13/16" (21)	13/16" (21)
30" L / E SERIES TRIM	CONVECTION	STANDARD
Top	1/4" (6)	9/16" (14)
Bottom	3/4" (19)	11/16" (17)
Sides	1 3/16" (30)	1 3/16" (30)
36" L SERIES TRIM	CONVECTION	STANDARD
Top	3/16" (5)	NA
Bottom	13/16" (21)	NA
Sides	1 1/4" (32)	NA

ELECTRICAL

ELECTRICAL REQUIREMENTS	
MICROWAVE OVENS	
Electrical Supply	grounded, 120 V AC, 60 Hz
Service	15 amp dedicated circuit
Receptacle	3-prong grounding-type
Power Cord	3' (.9 m), 4' (1.2 m) for drawer

Drawer Microwave

STANDARD INSTALLATION

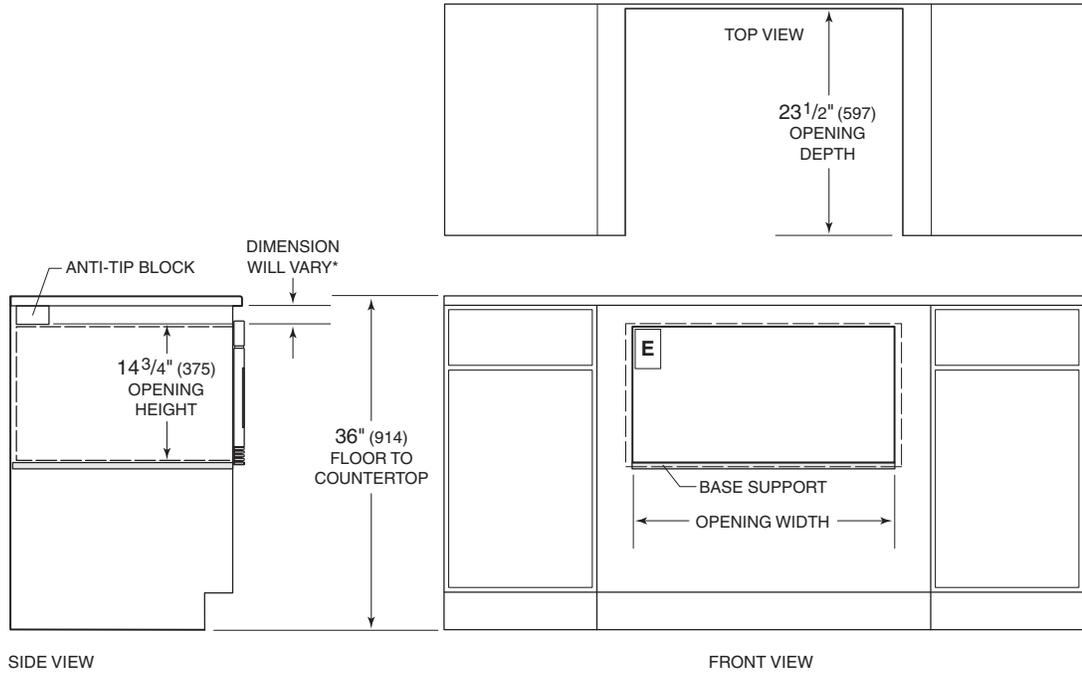


*Dimension must accommodate height of anti-tip block and drawer face overlap.
 NOTE: Dashed line represents profile of unit.

STANDARD INSTALLATION	
WIDTH	OPENING WIDTH
24" Drawer Microwave	22 ¹ / ₈ " (562)
30" Drawer Microwave	28 ¹ / ₂ " (724)

Drawer Microwave

FLUSH INSET INSTALLATION

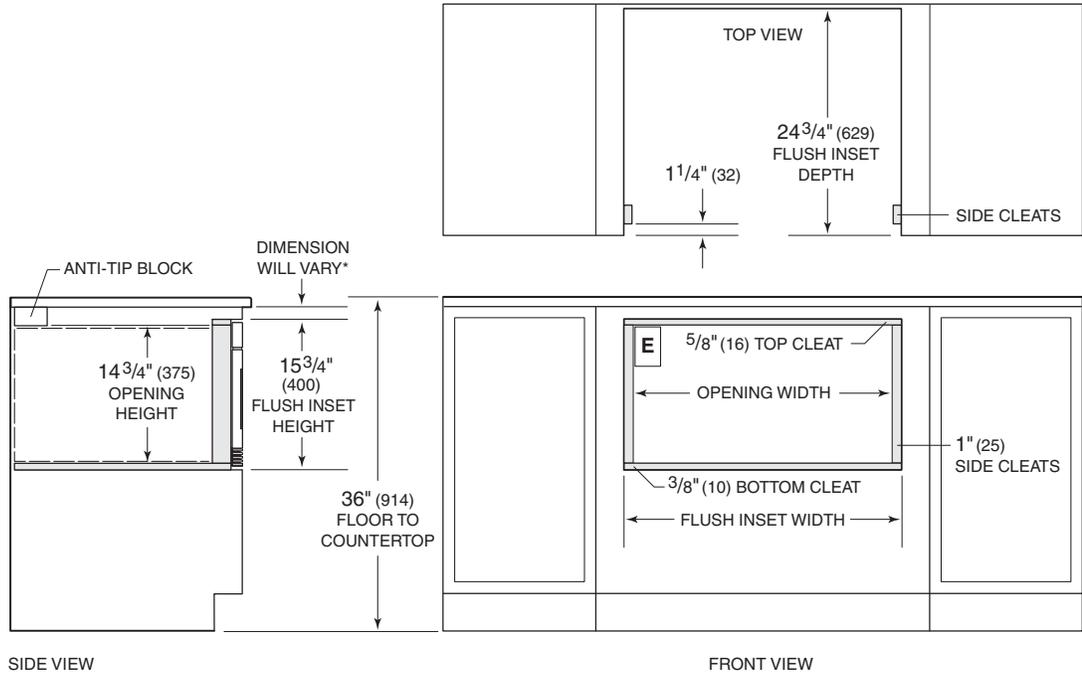

*Dimension must accommodate height of anti-tip block and drawer face overlap.
 NOTE: Dashed line represents profile of unit.

FLUSH INSET INSTALLATION		
WIDTH	OPENING WIDTH	FLUSH INSET
24" Drawer Microwave	22 ¹ / ₈ " (562)	24 ³ / ₈ " (619)
30" Drawer Microwave	28 ¹ / ₂ " (724)	30 ³ / ₈ " (772)



WOLF APPLIANCE, INC. P.O. BOX 44848 MADISON, WI 53744 WOLFAPPLIANCE.COM 800.222.7820

WDG

2/2013