

AA490711
Vario control knob for use with VL 414
downdraft
Stainless Steel

Solid stainless steel control knob
Can be perfectly combined with other
Vario 400 series products
Comes without blower, can be
combined with Gaggenau's highly
performing and highly efficient
brushless DC (BLDC) blowers

Operation

Control knob with illuminated ring and
output marking.

Features

3 electronically controlled output levels.
Run-on function, 6 min.
Sensor-controlled operation of the AR
blower if at least one VL 414 downdraft
unit is open.

Planning notes

For positioning examples of the knob at
any location between Vario cooktops,
see the Vario planning section in the
Models & Dimensions.
The separate electronics box needs to
be installed so that it is accessible.
When installing a ventilation hood with
air extraction mode and a chimney-
vented fireplace, the power supply line
of the ventilation appliance needs a
suitable safety switch.

Rating

Total rating: 10 W.
Connecting cable 69" with plug.

Product Features

Operating Mode

Convertible: Ducted / Recirculating

Number of speed settings

3-stage

Delay Shut off modes

6

Silence level (dBA)

Required accessories

Optional accessories

AA400510

Number of lights

0

Type of lamps used

Total power of the lamps (W)

Grease filter material

Grease filter type

Clean filter reminders

Consumption and connection features

UPC code

825225910138

Material

Stainless steel

Watts (W)

10

Current (A)

10

Volts (V)

120

Frequency (Hz)

60

Approval certificates

ETL, Intertek

Power Cord Length

69

Plug type

120V-3 prong

Overall appliance dimensions (HxWxD) (in)

/ x 2 6/16" x

Product packaging dimensions (HxWxD) (in)

5.31 x 12.99 x 15.35

Height of the chimney (in)

Vertical rise height

Required distance above cooktop/ ranges

Net weight (lbs)

6

Gross weight (lbs)

7

Adjustable feet

Motor location

without motor

Maximum CFM

Diameter of air duct (in) top

Diameter of air duct (in) back

Discharge direction

No-return airflow flap

No



2017-04-05

Page 1


Color Variants

AA490711


Stainless Steel

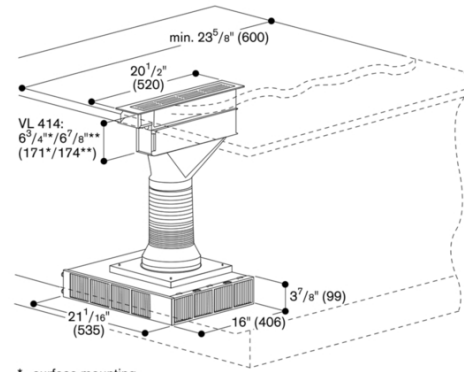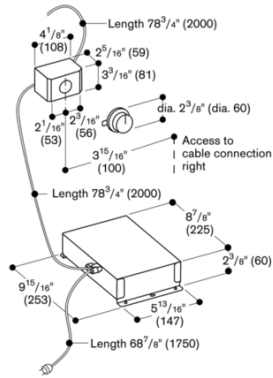

* surface mounting
** flush installation

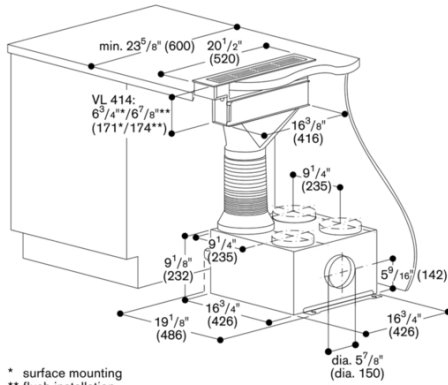

* surface mounting
** flush installation

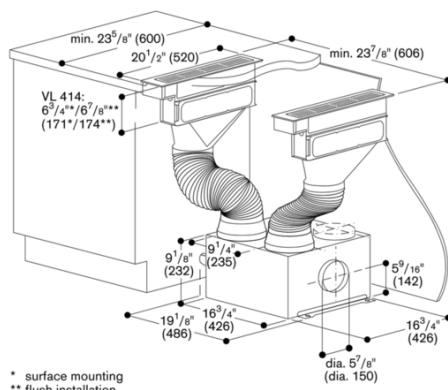

* surface mounting
** flush installation