



**FRIEDRICH**

1883

---





# ROOM AIR CONDITIONERS

---



THE EXPERTS IN ROOM AIR CONDITIONING

# Table of Contents

<b>Window Air Conditioners</b>  page <b>4</b>	<b>Thru-the-wall Air Conditioners</b>  page <b>18</b>
specifications 16	specifications 25
<b>Portable Air Conditioners</b>  page <b>26</b>	<b>Hazardous Location Air Conditioners</b>  page <b>29</b>
specifications 28	specifications 31

## What type of air conditioner do you need?

	WINDOW AIR CONDITIONERS		THRU-THE-WALL		PORTABLE	HAZARDOUS LOCATION
	Kühl®	Chill®	WallMaster®	Uni-Fit®	ZoneAire®	Hazardgard®
PERMANENT INSTALLATION	Y	Y	Y	Y	—	Y
SEASONAL INSTALLATION	Y	Y	—	—	Y	—
CAN BE INSTALLED THRU-THE-WALL	Y	Y -except CP05	Y	Y	—	Y
ENERGY STAR®	Y	Y	Y	Y	NA	NA
<b>POWER SUPPLY</b>						
115V	Y	Y	Y	Y	Y	—
230V	Y	Y	Y	Y	—	Y
<b>COOLING W/ HEAT</b>						
HEAT PUMP	Y	—	Y	—	Y	—
ELECTRIC HEAT	Y	Y	Y	Y	—	—
<b>EXTRA LARGE CAPACITY</b>						
>17,000 Btu	Y	Y	—	—	—	Y
>25,000 Btu	Y	—	—	—	—	—
<b>SPECIAL FEATURES</b>						
ROLLS FROM ROOM TO ROOM	—	—	—	—	Y	—
SMARTGRID READY	Y*	—	—	—	—	—
ENHANCED FILTRATION	Y	—	—	—	—	—
<b>OPTIONAL FEATURES</b>						
WI-FI CONTROL	Y*	—	—	—	—	—
CREATE CUSTOM SCHEDULES	Y*	—	—	—	—	—
GROUP UNITS FOR CENTRALIZED CONTROL	Y*	—	—	—	—	—
DECORATOR COLORS	Y	—	—	—	—	—

\*Requires FriedrichLink® adapter accessory (sold separately).

# Window Air Conditioner Selector Guide

		COMMERCIAL GRADE		RESIDENTIAL GRADE	
		Kühl®	Kühl®+	Chill®	Chill®+
OVERVIEW	Description	Bold design and exclusive features. Programmability to rival central systems. Trusted Friedrich durability. Designer colors.	All the performance and durability of Kühl, plus heating. Choose efficient heat pump or toasty electric heat.	Good value. Available in a large range of cooling capacities. 24-hr. timer.	Good value. Four models with electric heat. 24-hr. timer.
	Room size (sq. ft.)	100-2700	350-2700	100-1500	100-1500
	Functions	COOL ❄️	HEAT/COOL ❄️🔥	COOL ❄️	HEAT/COOL ❄️🔥
	Applications	COMMERCIAL AND RESIDENTIAL	COMMERCIAL AND RESIDENTIAL	RESIDENTIAL AND LIGHT COMMERCIAL	RESIDENTIAL AND LIGHT COMMERCIAL
COMFORT & CONVENIENCE	Electronic controls	Y	Y	Y	Y
	Timer	7-day with up to 4 settings per day*; 24-hr. timer	7-day with up to 4 settings per day*; 24-hr. timer	24 hr.	24-hr.
	Remote control	LCD	LCD	LCD	LCD
	Control with smart phone or computer with FriedrichLink® (accessory required)	Y	Y	—	—
	Auto-restart w/setting retention	Y	Y	Y	Y
	Auto temp/ fan speed adjustment	Y	Y	—	—
	Auto-changeover	—	All except EQ08	—	—
	Air flow directions	8	8	4	4
	Auto swing louvers	—	—	All except CP05	Y
Optional color fronts	Y	Y	—	—	
SOUND REDUCTION TECHNOLOGY	Steel inner wall and extra dense insulation	Y	Y	—	—
	Vibration isolating design and components	Y	Y	—	—
	Superior airflow design	Y	Y	—	—
EARTH FRIENDLY	ENERGY STAR® models	Y	Y	Y	—
	Smart Grid capable	Y	Y	—	—
	Environmentally friendly R-410A	Y	Y	Y	Y
	Energy saver switch	Y	Y	Y	Y
	RoHS compliant	Y	Y	—	—
HEALTH	Washable, antimicrobial air filter	Y	Y	Y	Y
	Optional carbon filter	Y	Y	—	—
	Check filter reminder	Y	Y	Y	Y
	Superior fresh air intake/stale air exhaust	All except SQ	All except EQ08	Stale air exhaust only, all except CP05	Stale air exhaust only
SAFETY	EntryGard™ anti-intrusion protection	Y	Y	Y	Y
	Insect barrier	All except SQ	All except EQ08	—	—
INSTALLATION	Slideout chassis	Y	Y	All except CP05	Y
	Power cord direction	Left or right	Left or right	Left or right	Left or right
	Thru-the-wall installation option	Y	Y	All except CP05	Y
	Window installation hardware	Heavy duty	Heavy duty, available as accessory	Standard	Standard

\*Requires internet connection and FriedrichLink® accessory.

## Product Selection Tools

These tools are only a guide. Due to variations in room design, local climate and occupancy, larger areas may require the use of multiple units to provide the optimal cooling solution. Please consult your local authorized Friedrich distributor or the Friedrich Technical Assistance team for sizing or application assistance.

### COOLING SIZING GUIDE

The cooling guide to the right is based on normal room insulation, average number of sun-exposed windows and two-person occupancy.

### HEATING SIZING INFORMATION

In heating mode, an energy efficient heat pump will generate slightly less heating Btus than it would in cooling mode. However, in heating mode, heat pumps use approximately 1/3 the energy of resistance heat, making them an excellent high-efficiency alternative. Back-up resistance heat ensures heat operation below 40° F outdoor temperatures for year 'round comfort.


## Common Window Types

Traditional wooden windows are typical in many residences built before 1965, but more modern windows are often constructed of aluminum or vinyl. Many newer energy efficient windows like double-glazed windows actually sandwich low conductance gas between two panes of glass. While Friedrich air conditioners may be used with this type of window, care should be taken not to break the seal between the two panes of glass during installation.


Depending on the style of window in the application, you may want to consider the cooling solutions in the adjacent chart. Professional installers may be able to make field adaptations, including removing all or part of a window to support alternative types of air conditioning units. Professional installers should also be able to tell you about any local codes that may apply to your installation.

### THRU-THE-WALL INSTALLATION


Many models may be installed through a wall so long as the unit's side vents are not blocked or covered in any way. See page 17, In-wall Installation max. depth.

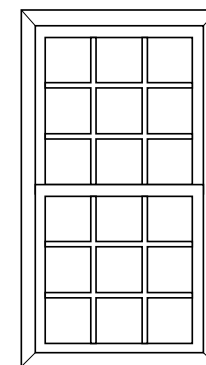


Single/double hung  
(Opens up or down)




Slider  
(Opens left to right, or right to left)



Awning  
(Cranks out)



Hopper  
(Opens in)



Casement  
(Cranks out)

## COOLING SIZING GUIDE

Area to be conditioned in sq. ft.	Cooling Btu
100 - 150	5000
150 - 250	6000
250 - 300	7000
300 - 350	8000
350 - 400	9000
400 - 450	10000
450 - 550	12000
550 - 700	14000
700 - 1000	18000
1000 - 1200	21000
1200 - 1400	23000
1400 - 1600	25000
1600 - 1900	28000
1900 - 2700	36000

## WHICH AIR CONDITIONER IS RIGHT FOR YOU?


Window Type	Air Conditioner
Single/double hung	Window, portable, ductless
Slider	Window*, portable, ductless
Casement	Portable, ductless
Vertical Casement	Portable, ductless
Awning	Portable, ductless
Hopper	Portable, ductless
Picture (non-opening)	Thru-the-wall, ductless

\*May require additional modifications

# MAINTENANCE



KÜHL.  
BUILT TOUGH FOR THE  
MOST DEMANDING  
APPLICATIONS

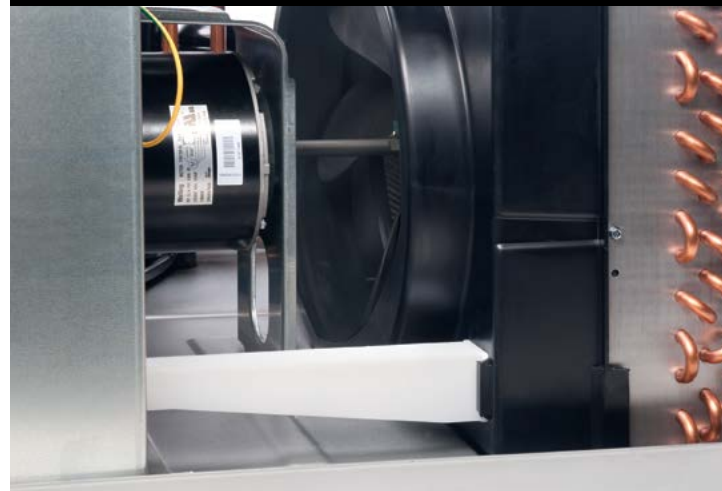

## Kühl Construction.

For over 125 years, Friedrich products have been renowned for their commercial-grade, built-to-last design.

Advanced engineering, high-end materials and components, and rigorous product testing are just a few examples of Friedrich's commitment to quality. When designing Kühl, our engineers challenged convention to develop the very best window air conditioner on the market.

Kühl incorporates high-end materials like heavy-gauge galvanized steel, rifled copper tubing, and high-tech aluminum fins.

Kühl also uses the most durable components to extend the life of your air conditioner, including fully -enclosed fan motors that seal out dirt, and powerful, energy-efficient compressors, which make Kühl as tough an air conditioner as we've ever built.

## Kühl Quiet.

Kühl has been engineered for quiet operation. Materials have been chosen because of their sound-absorption properties and every moving part has been braced and insulated. For example, extra thick rubber grommets absorb vibration and reduce noise inside, while steel inner walls and extra dense insulation block outdoor noise.

Rugged hardboard side panels help reduce noise and keep out light. The unique air path is more streamlined, drawing air through the sides, away from moving parts. And our larger discharge vents allow for smoother airflow, delivering maximum conditioned air quietly.



## Kühl Comfort.

The most comfortable temperature is the one you never notice. Kühl uses multiple built-in environmental sensors to more accurately monitor indoor and outdoor temperatures so that it can maintain your ideal settings.

Kühl+ models have the ability to cool or heat as needed so units can operate year-round. And, like the most advanced central systems, Kühl+ automatically switches between air conditioning and heating functions to maintain the desired comfort level. You won't have to lift a finger.

Plus, Kühl's air flow systems are tested for powerful and precise air distribution which means faster cooling when you need it most.



Deep Red

## COLOR YOUR WORLD

with one of six Kühl colors. Change your Kühl's appearance to complement your color scheme or to make a bold statement.



Kühl's streamlined modern design in Neutral Gray can blend in with any décor.

Or coordinate a look that complements your space by using any of the six colored front covers.



Neutral Gray  
(STANDARD)



Pink Diamond



Cobalt Blue



Classic Beige





Black Onyx



Designer White

## Kühl® Control

Built-in controls	<b>SIMPLE OPERATION</b> Turn the unit on, select 'MODE' and make simple up/down temperature adjustments either at the control panel or with included remote.
	<b>BUILT-IN 7 DAY SCHEDULES</b> Kühl units include two 7-day energy management schedules which can be accessed and selected from the unit's controls.  The 'Residential' schedule causes Kühl to raise the room temperature temporarily during the hours when most people are away at work and lower them again prior to the time when most people will return home.  The 'Commercial' schedule tells the unit to raise temperatures after typical working hours and on weekends when commercial spaces are typically unoccupied.
Wi-Fi control 	<b>CUSTOM 7-DAY SCHEDULE</b> (requires optional accessory sold separately) Create up to 5 custom programs that you can use to operate your Kühl air conditioner for maximum comfort and efficiency. Each 7-day program allows up to 4 setting changes per day.  <b>WIRELESS CONTROL</b> Control Kühl units with a smartphone, tablet or computer. You can even group units to operate as a single system for central air-like control.
Wireless thermostat 	<b>KWW WIRELESS THERMOSTAT</b> (requires optional accessory sold separately) Connect up to 8 Kühl units* with 1 KWW thermostat. Each unit requires 1 communication module (KCM). KWW thermostat ships with 1 KCM module.  Kühl units* can be connected to a Building Management System with a KCM module (1 for each Kühl unit) and a KJD. KEG may also be required depending on Building Management System. Contact your Friedrich sales representative for more information.

\*Wireless thermostat and Building Management Systems are not compatible Kühl SQ and EQ models.

## Smart Grid Capable

Kühl is the first room air conditioner that can tie into a power company's smart grid.

A grid is a network that brings electricity from power stations to consumers. New technologies allow power companies to adjust electrical loads of residential users based on their specific needs - this is called a 'smart grid'. Smart grid helps consumers to be better informed about their electricity usage and allows electric utility companies to serve customer demand in the most efficient way.

For example, during a hot summer afternoon when AC units are running at full capacity, the smart grid can send information to recalibrate other loads, which helps to alleviate stress on the system as a whole.

Source: SGIC (Smart Grid Information Clearinghouse)



Control Kühl with a smartphone, tablet or computer.

FriedrichLink® Wi-Fi allows monitoring and control of one or all of your Kühl air conditioners remotely.



Connect Kühl\* to a Building Management System.





If you have a room that is too cold in winter, too hot in summer, adding a Kühl+ model is the perfect solution.

## Window Air Conditioners

### Ultra Premium Line

Experience the control and convenience of a central air conditioning system in ways you never thought possible. Control Kühl units via FriedrichLink®.

You'll find more options, features and ways to customize your cooling experience than you ever thought possible in a window air conditioning solution.



Full LCD display shows MODE, FAN SPEED, SET TEMPERATURE and SCHEDULE. Adjust TEMPERATURE and FAN SPEEDS, set AUTO MODE and turn the SCHEDULE ON/OFF.

FITS WINDOWS FROM 22" TO 42" WIDE




Neutral Gray (STANDARD)



FITS WINDOWS FROM 27 3/8" TO 42" WIDE



Neutral Gray (STANDARD)



**Kühl®**  
5200-9600 Btu  
**Up to 11.2 EER**

**Kühl+ Electric Heat**  
COOLING  
7900 Btu  
**Up to 11.2 EER**  
ELECTRIC HEAT  
4000 Btu

**Kühl®**  
8000-36000 Btu  
**Up to 11.5 EER**

**Kühl+ Electric Heat**  
COOLING  
12000-36000 Btu  
**Up to 11.3 EER**  
ELECTRIC HEAT  
8900-17300 Btu

**Kühl+ Heat Pump**  
COOLING  
9500-24000 Btu  
**Up to 10.4 EER**  
HEATING  
8000-22000 Btu  
**Up to 2.7 COP**

# Kühl® Features

## Comfort & Convenience

- Convenient control from your smartphone, tablet or computer via FriedrichLink® (required accessory sold separately)
- 2 ready-to-go 7-day energy management programs
- Create customizable, 7-day schedules with up to 4 setting changes per day (requires accessory, sold separately)
- 24-hour timer
- Up to 4 cooling and 4 fan-only speeds on select models†
- Automatic fan speed adjustment
- Auto-changeover from cool to heat; heat to cool to maintain set temperature (Kühl+ models except EQ08)
- 8-way air flow control
- Temperature readout can display set temperature and room temperature
- Control panel lockout (ON/OFF)
- LCD panel auto dims if not in use
- Nightlight mode

## Superior Sound Reduction Technology

- Steel inner wall and extra dense insulation materials block outdoor noise
- Vibration isolating design and components diminish traditional operating noise
- Precision engineering maximizes air flow while delivering ultraquiet operation

## Superior Filtration

- Superior fresh air intake and stale air exhaust vent\*
- Washable, antimicrobial air filter
- Check filter reminder
- Optional premium filter when used in conjunction with standard filter provides superior air filtration with ratings as high as MERV 6, while also adsorbing odors and reducing ozone and VOCs
- Hinged door for easy filter access for easier maintenance

## Durable

- Robust 20 gauge steel cabinet
- Solid-sleeve top keeps out falling debris\*
- Solid-steel blower housing offers enhanced protection
- Totally enclosed commercial grade fan motor runs at a lower temperature to prevent overheating and is double-mounted for added stability and reduced wear
- Durable base pan and steel inner walls
- Unit's structural integrity allows it to be removed, cleaned and maintained outside of its sleeve
- Aluminum rear grille protects the outdoor coil from damaging debris and vandalism
- Aluminum end plates will not contribute to rust-stained building exteriors
- Scratch-resistant cabinet
- High-tech aluminum fins with rifled copper tubing are more efficient and less prone to corrosion
- Heavy-duty installation hardware lasts longer and provides a superior barrier from the outside elements

## Installation Features

- Install in a window or thru-the-wall
- Slideout chassis for more permanent installation and easier access for maintenance
- Includes heavy duty window installation hardware (optional accessory on Kühl+ models sold separately)
- Rugged hardboard side panels or (heavy duty side curtains on SQ and EQ models) for a more permanent installation
- Power cord can run either left or right
- Firm grip handles for easier chassis installation and removal
- Front cover attaches easily and securely. Nut driver included\*\*.

## Earth Friendly

- Smart Grid capable
- Auto Fan mode saves money by conserving energy
- ENERGY STAR® qualified models, including heat pumps
- Environmentally-friendly R-410A refrigerant used in all models
- Recyclable packaging
- RoHS compliant

## Safety & Security Features

- EntryGard™ anti-intrusion protection-steel retaining wire secures the chassis to the sleeve to deter 'kick-in' intrusion
- Powercord leakage current protected
- Insect barrier\*
- Protective rear grille

\* Feature not available on Kühl SQ and EQ models. \*\*Nut driver not required for Kühl SQ and EQ models.

† Kuhl SQ and SL models have 3 fan speeds. Kuhl+ models have 3 fan speeds cooling and heating.



# Kühl® Accessories

## FRIEDRICHLINK® WI-FI ADAPTER

Wi-Fi Adapter Accessory connects to unit to allow for remote wireless access and programming from a computer, tablet or mobile device.

Model	Kit No.
N Series	KWIFI



## PREMIUM CARBON FILTERS

Remove odors and VOCs (volatile organic compounds). Achieve up to a MERV 6 rating when used with standard filter. 3 pk.



Model	Kit No.
SQ and EQ	KWCFO
SS, ES and YS	KWCFS
SM, EM and YM	KWCFM
SL, EL and YL	KWCFL

## WINDOW MOUNTING KITS: KÜHL+

Heavy duty kits required for installation of these Kühl+ models in a window.

Heat/Cool Models	Kit No.
EQ08N11B*	KWIKQA
ES12N33B, ES16N33, YS10N10B and YS12N33B.	KWIKSA
EM18N34, EM24N34A and YM18N34B.	KWIKMA
EL36N35B and YL24N35B.	KWIKLA

\*EQ08N11B window kit KWIKQ does not include window brackets.



KWIKQ



KWIKS, KWIKM, KWIKL

## COLORED FRONT COVERS

Colored front cover kits available in six colors.



Deep Red



Cobalt Blue



Classic Beige



Designer White



Black Onyx



Pink Diamond

Model	COLOR					
	Deep Red	Cobalt Blue	Classic Beige	Designer White	Black Onyx	Pink Diamond
	Kit No.					
SQ and EQ	KWREDA	KWBLUA	KWBGQA	KWWHTQA	KWBLQA	KWPNQA
SS, ES and YS	KWREDA	KWBLUA	KWBGSA	KWWHTSA	KWBLKA	KWPNKA
SM, EM and YM	KWREDA	KWBLMA	KWBGMA	KWWHTMA	KWBLKA	KWPNKA
SL, EL and YL	KWREDA	KWBLLA	KWBGMA	KWWHTLA	KWBLKA	KWPNKA

## DRAIN KIT

Drain tube field installed to the bottom on the base pan.

Model	Kit No.
All Kühl Series Models	DC2



## WIRELESS THERMOSTAT- KWW

Wireless thermostat for control of Kühl units\*. One thermostat can control up to 8 Kühl units. Additional units require 1 KCM communication module per unit. KWW Thermostat ships with 1 KCM Communication Module.



## COMMUNICATION MODULE- KCM

Communicates with KWW thermostat or building management system.

\*Not compatible with Kühl SQ and EQ models.





# CHILL<sup>®</sup> SLEEK DESIGN

and outstanding efficiency.


Available in a range of capacities with convenience features for carefree cooling and heating.

## Premium Line

Sleek white design and energy efficient operation, including heat/cool models.

Our efficient line of room air conditioners with programmable controls for convenient operation

AUTO AIR SWEEP SWING LOUVERS FOR EVEN COOLING THROUGHOUT THE ROOM.

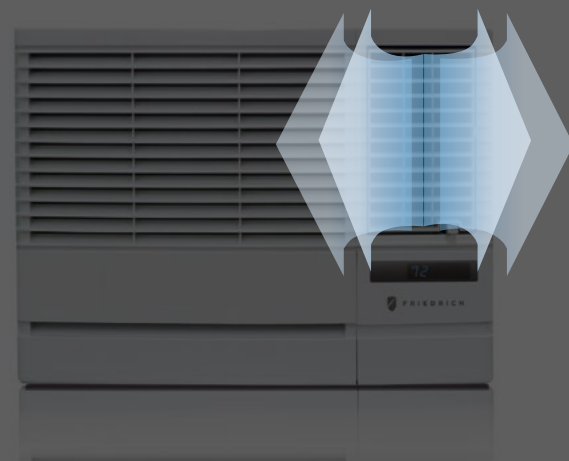

Money Saver<sup>®</sup> feature saves energy by cycling the fan with the compressor

## Window Air Conditioners

### Comfort & Convenience

- 24-hour timer
- Auto air sweep swing louvers\* provide more even air distribution
- 3 cooling speeds, plus 3 fan-only settings; 2 cooling speeds, 2 heating speeds, plus fan-only setting on Chill+
- Ultraquiet operation
- 4-way air flow control
- Auto-restart saves settings if power is interrupted

### Earth Friendly

- ENERGY STAR<sup>®</sup> qualified models
- Money Saver<sup>®</sup> setting saves money by operating the fan only when cooling

### Health

- Washable, antimicrobial air filter
- Check filter alert
- Stale air exhaust

### Installation Features

- Slideout chassis\*
- Install in window or thru-wall\*\*
- Standard installation hardware
- Expandable side curtains
- Power cord can run either left or right out of the side of the unit front\*

### Safety & Security Features

- EntryGard<sup>™</sup> anti-intrusion protection

FITS WINDOWS FROM 20 1/8" TO 36" WIDE

CP05



COOL

Select MODE, FAN SPEED, MONEY SAVER<sup>®</sup>, adjust TEMPERATURE and set the TIMER.

FITS WINDOWS FROM 20 1/8" TO 42" WIDE



COOL



COOL & HEAT

Select MODE, FAN SPEED, MONEY SAVER<sup>®</sup>, AUTO AIR SWEEP, adjust TEMPERATURE and set the TIMER.

Chill<sup>®</sup>  
5450 Btu  
10.7 EER

Chill<sup>®</sup>  
6000-23500 Btu  
Up to 11.3 EER

Chill<sup>®</sup>+  
Electric Heat  
COOLING  
8000-23500 Btu  
Up to 9.8 EER

ELECTRIC HEAT  
3850-12000 Btu

\* Feature not available on CP05. \*\* CP05 has a fixed chassis and is for window installation only.





# Specifications

★ ENERGY STAR® models

Model	Cooling Btu	Heating Btu	Volts Rated	Cooling Amps	Cooling Watts	Heating Amps	Heating Watts	Energy Efficiency Ratio EER	Estimated Yearly Energy Cost	COP	Moisture Removal-Pints/HR	CFM	Sleeve	Net Wt. lbs.	Ship Wt. lbs.
<b>Kühl®</b>															
★ SQ05N10B	5200	-	115	4.7	464	-	-	11.2	\$42	-	0.5	190	Q	72	85
★ SQ06N10B	5700	-	115	4.7	509	-	-	11.2	\$46	-	0.5	190	Q	72	85
★ SQ08N10B	7900	-	115	6.4	705	-	-	11.2	\$63	-	1.2	200	Q	71	84
★ SQ10N10	9600	-	115	9.2	980	-	-	9.8	\$88	-	2.1	240	Q	71	84
★ SS08N10B	8000	-	115	6.1	696	-	-	11.5	\$63	-	1.9	255	S	99	121
★ SS10N10B	9700	-	115	7.8	858	-	-	11.3	\$77	-	2.5	300	S	106	128
★ SS12N10B	12000	-	115	9.7	1062	-	-	11.3	\$96	-	3.0	300	S	112	134
★ SS14N10A	13500	-	115	12.0	1250	-	-	10.8	\$113	-	4.0	275	S	116	133
★ SS12N30B	12000/12000	-	230/208	4.9/5.2	1062/1062	-	-	11.3/11.3	\$96	-	3.4	325	S	112	134
★ SS16N30	15500/15200	-	230/208	6.5/7.1	1449/1421	-	-	10.7/10.7	\$130	-	4.8	350	S	116	136
★ SM15N10B	15000	-	115	12.0	1339	-	-	11.2	\$121	-	3.5	360	M	141	154
★ SM18N30	17500/17200	-	230/208	7.4/8.0	1635/1607	-	-	10.7/10.7	\$147	-	4.6	350	M	140	161
★ SM21N30B	20500/20000	-	230/208	9.3/10.2	2092/2062	-	-	9.8/9.7	\$188	-	6.0	425	M	132	153
★ SM24N30A	23500/23200	-	230/208	12.7/13.6	2765/2730	-	-	8.5/8.5	\$249	-	7.1	430	M	152	173
★ SL24N30B	24000/23800	-	230/208	10.8/11.4	2449/2429	-	-	9.8/9.8	\$220	-	7.0	640	L	191	212
★ SL28N30B	28000/27600	-	230/208	13.0/14.0	2857/2875	-	-	9.8/9.6	\$257	-	8.5	640	L	193	214
★ SL36N30B	36000/35500	-	230/208	17.5/19.2	4000/3944	-	-	9.0/9.0	\$360	-	12.0	725	L	212	248
<b>Kühl+® (Heat Pump)</b>															
★ YS10N10B*	9500	8000	115	8.2	913	7.3	870	10.4	\$82	2.7	2.0	300	S	109	131
★ YS12N33B	11500/11300	9400/9000	230/208	5.0/5.4	1106/1087	4.6/5.0	1132/1139	10.4/10.4	\$100	2.4/2.3	3.0	375	S	115	136
★ YM18N34B	17500/17200	15500/15000	230/208	7.5/8.1	1683/1654	7.8/8.4	1824/1765	10.4/10.4	\$151	2.5/2.5	5.4	370	M	141	154
★ YL24N35B	24000/24000	22000/22000	230/208	10.8/11.6	2449/2449	10.7/11.4	2391/2391	9.8/9.8	\$220	2.6/2.6	7.0	600	L	197	211
<b>Kühl+® (Electric Heat)</b>															
★ EQ08N11B	7900	4000	115	6.4	705	11.2	1290	11.2	\$63	-	1.2	200	Q	72	84
★ ES12N33B	12000/12000	10700/8900	230/208	4.9/5.2	1062/1062	16.0/14.7	3500/2900	11.3/11.3	\$96	-	3.4	325	S	113	128
★ ES16N33	15500/15200	10700/8900	230/208	6.5/7.1	1449/1421	16.0/14.7	3500/2900	10.7/10.7	\$130	-	4.8	350	S	117	133
★ EM18N34	17500/17200	13000/10600	230/208	7.4/8.0	1635/1607	19.5/17.0	4200/3500	10.7/10.7	\$147	-	4.6	350	M	141	154
★ EM24N34A	23500/23200	13000/10600	230/208	12.7/13.6	2765/2730	19.5/17.0	4200/3500	8.5/8.5	\$249	-	7.1	430	M	153	166
★ EL36N35B	36000/35500	17300/14300	230/208	17.5/19.2	4000/3944	24.0/22.4	5500/4650	9.0/9.0	\$360	-	12.0	725	L	213	246
<b>Chill+® (Cool Only)</b>															
★ CP05G10A	5450	-	115	4.8	500	-	-	10.7	\$46	-	1.5	140	P1	46	50
★ CP06G10A	6000	-	115	4.9	530	-	-	11.2	\$48	-	1.8	200	P6	60	66
★ CP08G10A	7800	-	115	6.3	690	-	-	11.2	\$63	-	2.2	250	P6	64	70
★ CP10G10A	10000	-	115	8.5	880	-	-	11.3	\$80	-	3.0	300	P7	81	87
★ CP12G10A	12000	-	115	9.7	1060	-	-	11.3	\$96	-	3.3	330	P7	87	93
★ CP15G10A	15000	-	115	12.0	1330	-	-	11.2	\$121	-	4.0	400	P8	120	134
★ CP18G30A	18000/17500	-	230/208	7.3/7.8	1600/1560	-	-	11.2/11.2	\$145	-	4.5	520	P9	136	150
★ CP24G30A	23500/23000	-	230/208	10.9/11.8	2390/2340	-	-	9.8/9.8	\$216	-	6.8	590	P9	146	160
<b>Chill+® (Electric Heat)</b>															
★ EP08G11A	8000	3850	115	7.5	820	11.0	1260	9.8	\$73	-	2.6	265	P7	79	85
★ EP12G33A	12000/11500	11200/9200	230/208	5.5/5.8	1220/1170	15.3/14.0	3500/2900	9.8/9.8	\$110	-	3.3	265	P7	87	93
★ EP18G33A	18000/17500	12000/9800	230/208	8.3/9.0	1850/1800	16.0/15.0	3670/3100	9.7/9.7	\$167	-	5.5	430	P9	136	150
★ EP24G33A	23500/23000	12000/9800	230/208	12.2/13.2	2760/2700	16.0/15.0	3670/3100	8.5/8.5	\$249	-	6.5	560	P9	146	160

\* Operates on 115 volt and is not equipped with supplemental heat. Will not provide heat at temperatures below 40°F. Friedrich room air conditioners are designed to operate in outdoor temperatures from 60°F to 115°F.

Kühl+ Heat Pump heating information (shown in red) indicates heat pump performance. Kühl+ and Chill+ Electric Heat heating information (shown in red) indicates electric heat strip performance. For Kühl+ Heat Pump electric heating performance refer to corresponding Kühl+ Electric Heat model.

As an ENERGY STAR® partner, Friedrich Air Conditioning Co. has determined that the selected ENERGY STAR® models meet the ENERGY STAR® guidelines for energy efficiency.

The consumer- through the AHAM Room Air Conditioner Certification Program- can be certain that the AHAM Certification Seal accurately states the unit's cooling and heating capacity rating, the amperes and the energy efficiency ratio.

Your operating costs will depend on your utility rates and use. The estimated operating cost is based on an electricity cost of \$ .12 per kWh. For more information, visit www.ftc.gov/energy.

Due to continuing research in new energy-saving technology, specifications are subject to change without notice.



# Installation Information

Sleeve	Height and Width INCHES		Depth with Front INCHES <b>A</b>	Shell Depth to Louvers INCHES <b>B</b>	Minimum Extension Into Room* INCHES	Minimum Extension Outside * INCHES	Window Width INCHES		In-wall Installation Finished Hole INCHES			Carton Dimensions INCHES		
	Height	Width					Minimum**	Maximum	Height	Width	Max. Depth <b>C</b>	Height	Width	Depth
<b>Q</b>	14 1/2"	19 3/4"	21 3/8"	8 1/2"	5 1/2"	10 3/4"	22"	42"	14 3/4"	20"	8 1/2"	18 3/4"	25 1/2"	22 3/4"
<b>P1†</b>	12"	18 1/2"	15"	5"	3 1/2"	10 3/4"	20 1/8"	36"	NOT FOR THRU-WALL			15 1/4"	22 1/4"	17 1/2"
<b>P6</b>	14"	18 3/8"	20 7/8"	8 1/8"	4 1/2"	11"	20 1/8"	36"	14 1/8"	18 7/8"	7 1/2"	17 7/8"	22 3/4"	22"
<b>P7</b>	15"	23 5/8"	21 3/4"	8 3/4"	4 1/2"	12"	25 1/4"	39"	15 1/4"	23 7/8"	8"	18 3/4"	26 3/4"	23 7/8"
<b>P8</b>	16 7/8"	26"	26 7/8"	10 1/4"	5 1/2"	16 5/8"	26 1/2"	42"	17 1/8"	26 1/4"	9"	21 1/2"	29 1/2"	29"
<b>P9</b>	16 7/8"	26"	30 3/8"	10 1/4"	5 1/2"	19 1/2"	26 1/2"	42"	17 1/8"	26 1/4"	9"	21 1/2"	33"	28 7/8"
<b>S</b>	15 15/16"	25 15/16"	29"	8 3/4"	5 3/4"	16 15/16"	27 3/8"	42"	16 3/16"	26 3/16"	7 3/8"	19"	34 1/2"	29"
<b>M</b>	17 15/16"	25 15/16"	29"	8 3/4"	5 3/4"	16 15/16"	27 3/8"	42"	18 3/16"	26 3/16"	7 3/8"	21"	34 1/2"	29"
<b>L</b>	20 3/16"	28"	35 1/2"	16 1/2"	5 3/8"	18 15/16"	29 7/8"	42"	20 3/8"	28 1/4"	15 1/8"	24 1/2"	38 7/8"	31 5/8"

\* Minimum extensions when mounted in a window.

\*\* Minimum widths achieved using one side curtain assembly as opposed to both in a standard installation.


† Sleeve P1 does not have in-wall hole dimensions, as these units are fixed chassis and should not be installed in-wall.

NOTE: S, M and L sleeves may be installed in window with no side kits if properly installed.

# Circuit Rating/ Breaker


Model	Circuit Rating Breaker or T-D Fuse	Plug Face (NEMA#)	Power Cord Length (ft.)	Wall Outlet Appearance
CP05G10A	125V-15A	5 -15P	6 1/2	
CP06G10A, CP08G10A, CP10G10A, CP12G10A and CP15G10A. EP08G11A. All SQ MODELS. EQ08N11B. SS08N10B, SS10N10B, SS12N10B and SS14N10A. YS10N10B. SM15N10B.	125V - 15A	5- 5P	6	
CP18G30A	250V - 15A	6 - 15P	4 1/2	
SS12N30B and SS16N30, SM18N30 and SM21N30B. SL24N30B.			6	
CP24G30A. EP12G33A, EP18G33A and EP24G33A.	250V - 20A	6 - 20P	4	
SM24N30A. SL28N30B. ES12N33B and ES16N33. YS12N33B.	250V - 20A	6 - 20P	6	
SL36N30B. EM18N34, EM24N34A and EL36N35B. YM18N34B and YL24N35B.	250V - 30A	6 - 30P	6	

Sleeve Dimensions Drawing

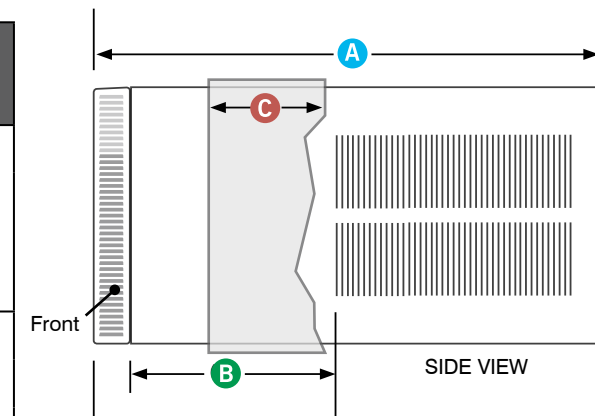

# Room Air Conditioner Model Identification Guide


## SL28N30A

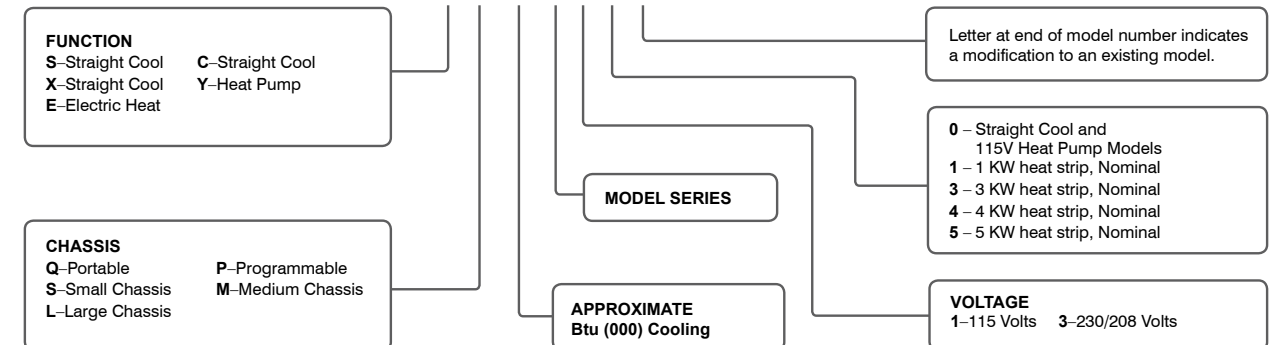


## WHEN SHOULD YOU INSTALL A SOLID SIDE SLEEVE?

A solid-side wall sleeve allows for installation in thick exterior walls where the installation of room air units with side vents would affect performance and may even void the warranty.


ROOM AIR CONDITIONER  
Blocked side vents restrict air flow.



FRIEDRICH THRU-THE-WALL  
Solid-side sleeve (no side vents) can be installed in thicker walls. Sleeve can be positioned flush with exterior wall.



Or with minimum intrusion into the room.



		THRU-THE-WALL MODELS	
		WallMaster®	Uni-Fit®
OVERVIEW	Sleeve size	Fits 27" sleeves	Fits sleeves from 24 1/2" to 27"
	Applications	RESIDENTIAL OR LIGHT COMMERCIAL	RESIDENTIAL OR LIGHT COMMERCIAL
COMFORT & CONVENIENCE	Perfect fit for Fedders' 27" sleeves	Y	—
	Top-mounted controls	Y	—
	Electronic controls	Y	Y
	Programmable timer	24 hr.	24 hr.
	Remote control	Y	Y
	Auto-restart when power is interrupted	Y	Y
	Smart Fan auto adjusting fan	Y	—
	Upward angled air discharge	Y	—
	Air flow direction control	4-way	6-way
Fan speeds	3	3	
SOUND REDUCTION TECHNOLOGY	Steel inner wall and extra dense insulation	Y	Steel inner wall
	Vibration-isolating design and components	Y	Y
	Superior airflow design	Y	—
EARTH FRIENDLY	ENERGY STAR® models	Y	Y
	Environmentally friendly R-410A	Y	Y
	Energy saver switch	Y	Y
HEALTH	Washable, antimicrobial air filter	Y	Y
	Stale air exhaust	—	Y
SAFETY	EntryGard™ anti-intrusion protection	Y	—
	Insect barrier	Y	—
INSTALLATION	Slideout chassis	Y	Y
	Power cord direction	Left	Right
	Concealed power cord option	Y	—
	Internal drain kit option	Y	—
	Baffle adapter kit (for installation in Fedders 'B' sleeves)	Y	—
	Condensate drain kit	Y	—

## THRU-THE-WALL UNITS IN TWO SIZES.

Upgrade your old inefficient units with Wallmaster® and Uni-Fit® thru-the-wall air conditioners.



### The best option for deep wall installations

Energy efficient solid-side air conditioners, heat pumps and electric heat models.

WallMaster® fits existing Fedders sleeves.

Sleeve Dimensions	Friedrich WSE Sleeve	Fedders A Sleeve	Fedders B Sleeve*
Height (inches)	16 3/4	16 3/4	16 3/4
Width (inches)	27	27	27
Depth (inches)	16 3/4	16 3/4	19 3/4

Chassis requires WSE sleeve (sold and shipped separately)  
\*Installation in Fedders B sleeve requires a baffle kit. See BAK accessory under accessories.



Uni-Fit® installs in many existing sleeves.

Sleeve Dimensions	Friedrich USC Sleeve	Amana	Carrier (51S Series)	Fedders/Emerson/Friedrich WSE	Emerson/Fedders	GE/Hot-point	Whirlpool	White-Westinghouse/Frigidaire/Carrier (52F Series)
Height (inches)	15 1/2	15 5/8	16 7/8	16 3/4	15 3/4	15 5/8	16 1/2	15 1/4
Width (inches)	25 7/8	26	25 3/4	27	26 3/4	26	25 7/8	25 1/2
Depth (inches)	16 3/4	16 7/8	18 5/8	16 3/4 or 19 3/4	15	16 7/8	17 1/8 or 23	16, 17 1/2 or 22

NOTE: Chassis requires USC sleeve for new installations (sold and shipped separately)




## Thru-the-wall Air Conditioners



### WallMaster®. A perfect fit in Friedrich and competitor's 27" sleeves.

Commercial grade quality unit is ideal for installation in new construction, retrofits and remodels.

Perfect fit in 27" wall sleeves, including Fedders A and B\* sleeves.

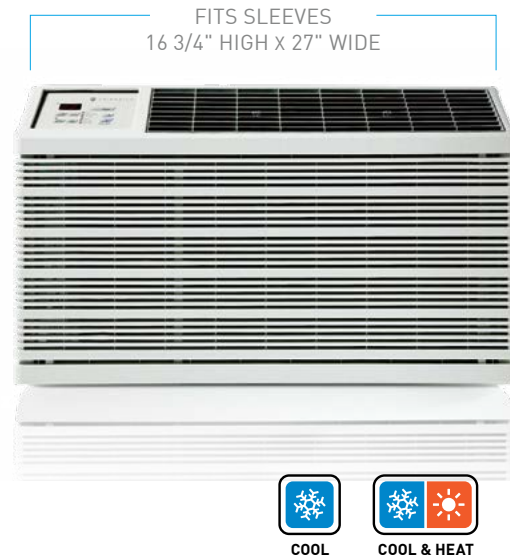

Select MODE, FAN SPEED, adjust TEMPERATURE and set the TIMER.

NOTE: Chassis requires WSE sleeve for new installations (sold and shipped separately)

### WSE wall sleeve ships with weather panels and grille.

Sleeve is shown at right with standard galvanized steel inner panel, painted steel outer panel and standard grille



Inner steel weather panel



WSE sleeve



Outer weather panel



Standard grille

Fits Fedders A & B sleeves. \*B sleeve installations require BAK accessory, baffle adapter kit.

## WallMaster® Features

### Comfort & Convenience

- Easy-to-reach, top mount controls
- Remote control
- 24-hour timer
- Smart Fan auto-adjusts fan speed to maintain desired temperature
- 3-speed fan
- Auto restart
- Electronic defrost control
- Reversible louver allows a second airflow option

### Energy Efficiency

- Money Saver® setting saves money by operating the fan only when needed
- ENERGY STAR® qualified models
- R-410A refrigerant

### Health and IAQ

- Washable, antimicrobial filter

### Safety & Security

- EntryGard™ anti-intrusion protection secures chassis to sleeve to deter 'kick-in' intrusion
- Power cord current leakage protected
- Insect barrier

### Durability & Quality

- Rotary compressors provide quiet, dependable performance
- Premium aluminum exterior grille
- Dense blower insulation
- Rifled copper tubing
- Impact resistant front cover
- High tech fins with sine wave lanced louvers increase energy efficiency by increasing surface area for heat exchange



Rifled copper tubing




Sine wave lanced louvers

### Accessories

- WSE sleeve, ships with inside and outside weather panel and standard grille
- AG architectural grille for use with WSE sleeve
- Baffle adapter kit for use with deep sleeve installations
- Drain kit for condensate disposal
- Internal drain kit for new construction applications where condensate drain system is built-in

### Installation Features

- Mounts flush with the exterior wall for a neat appearance
- Ideal for thicker wall installations, where side fins don't fit
- Reversible louver allows for a second airflow option
- A high efficiency replacement for 27" sleeves including Fedders A and B\*. Sleeve measures 27" W x 16 3/4" H

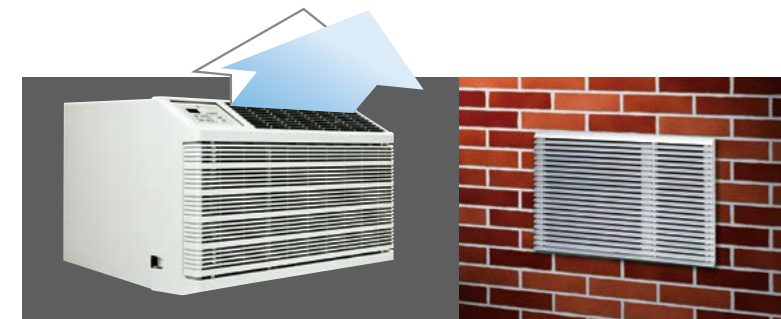

Angled air discharge for superior air distribution when the unit is installed low on a wall. Reversible louver for a second air flow option.

Sleeve can be installed flush with the exterior wall. Optional AG architectural grille shown.

### WallMaster®

8000-15600 Btu  
Up to 10.4 EER

### WallMaster® Electric Heat

COOLING  
9800-15600 Btu  
Up to 9.8 EER  
ELECTRIC HEAT  
9100-11000 Btu

### WallMaster® Heat Pump

COOLING  
9000-12000 Btu  
Up to 9.8 EER  
HEATING  
7500-9350 Btu  
Up to 2.6 COP



## Thru-the-wall Air Conditioners

### Uni-Fit® Universal fit for easy replacement in existing 24 1/2", 26" or 27" sleeves.

Residential grade quality for installation in new construction, retrofits and remodels.



Select MODE, FAN SPEED, MONEY SAVER®, adjust TEMPERATURE and set the TIMER.



### USC wall sleeve ships with weather panels and grille.

Sleeve is shown at right with standard painted steel inner panel, painted steel outer panel and standard grille



Inner weather panel



USC sleeve



Outer weather panel



Standard grille

NOTE: Chassis requires USC sleeve for new installations (sold and shipped separately)

## Uni-fit® Features

### Comfort & Convenience

- 6-way air flow control
- Remote control
- 24-hour timer
- 3-speed fan
- Auto restart
- Defrost control

### Energy Management

- Money Saver® setting saves money by conserving energy
- ENERGY STAR® qualified models
- R-410A refrigerant

### Health and IAQ

- Washable antimicrobial filter
- Stale air exhaust

### Durability & Quality

- Rotary compressors provide quiet, dependable performance
- Seacoast protection for corrosion resistance in harsh environments

### Installation Features

- Universal fit trim ring
- Chassis designed to fit 24 1/2" to 27" sleeves
- USC sleeve fits standard 26" sleeve opening. See installation manual for exact dimensions.

### Accessories

- USC sleeve ships with expanded aluminum grille
- Replacement grille ships with US/UE chassis for use in existing sleeves when a grille is needed
- UXAA architectural grille for use with USC sleeve



IMPORTANT: 1" gap on sides and 1/2" gap at top, which allows installation into varying sleeve sizes, can be covered by two-piece trim ring that fits over the chassis front. Trim ring comes standard with chassis.

**NEW!**  
Architectural grille for USC sleeve

### Uni-Fit®

8000-13000 Btu  
**Up to 9.8 EER**

### Uni-Fit®

Electric Heat  
COOLING  
8000-11500 Btu  
**Up to 9.6 EER**

ELECTRIC HEAT  
3850-11200 Btu



## Thru-the-wall Optional Accessories

### WallMaster® 27" Sleeve Exterior Grilles



**WSE SLEEVE**  
Standard Grille  
Premium, stamped steel grille with powder coat paint. Ships with sleeve. Galvanized steel inner and outer weather panels also ship with sleeve.




**WSE SLEEVE**  
Optional Architectural Grille- AG  
Premium brushed aluminum grille.

#### IMPORTANT:


Operating the air conditioner with incorrect rear grille or without Baffle Adapter Kit (on 19 3/4" deep sleeve) will recirculate discharge air and cause compressor overload to trip.

This will cause the unit to shut down temporarily and may lead to premature compressor failure.

#### CORRECT Vertical Louvers



#### INCORRECT Horizontal Louvers



### Installation Accessories (27" sleeve models only)

**DK / Drain Kit**  
Installed at the back of the unit and allows for attachment to condensate disposal system, if necessary or desired.



**IDK / Internal Drain Kit**  
New construction applications where a condensate drain system has been built into the wall interior.



**BAK / Baffle Adapter Kit**  
Necessary when installing in a sleeve deeper than 16 3/4" deep, such as Fedders B sleeve (19 3/4" deep).



### Uni-Fit® 26" Sleeve Exterior Grilles



USC Sleeve Standard Grille



Optional Architectural Grille UXAA

**STANDARD GRILLE** – Ships with USC sleeve  
Expanded aluminum grille designed for use with USC sleeve.


**REPLACEMENT GRILLE** – Ships with US/UE chassis  
Black plastic for use on existing sleeves without any grille.

#### IMPORTANT:

When installing into an existing sleeve, consult Installation Section of your Installation/Operation Manual to determine whether or not the grille needs to be replaced and/or a baffle adapter should be used.

### Sleeve/Chassis Dimensions

Model	Height	Width	Depth	Depth with Extension			Thru-the-wall Finished Hole		
				Front	Into Room	Outside	Height	Width	Max. Depth
<b>WallMaster®</b>									
WSE Sleeve	16 3/4"	27"	16 3/4"	23"	7 1/2"	9/16"	17 1/4"	27 1/4"	15 5/16"
Chassis	15 3/4"	26 1/2"	21"	22"	-	-	-	-	-
<b>Uni-Fit®</b>									
USC Sleeve	15 1/2"	25 7/8"	16 3/4"	20 1/2"	-	1/2"	15 3/4"	26 1/8"	16 1/4"
US Chassis	14 3/8"	24"	18 1/2"	20 1/8"	3 3/4"	-	-	-	-
UE Chassis	14 3/8"	24 5/8"	18"	19 5/8"	3 1/2"	-	-	-	-

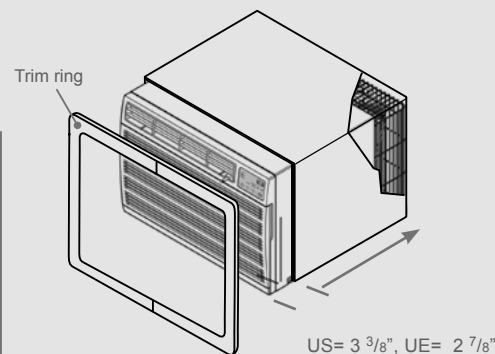

#### IMPORTANT:

US chassis w/front fully installed into USC sleeve extends into room 3 3/8". UE chassis w/front fully installed into USC sleeve extends into room 2 7/8". 1" gap on sides and 1/2" gap at top can be covered by two-piece trim ring that fits over the chassis front

## Thru-the-wall Specifications

★ ENERGY STAR® models

Model	Cooling Btu	Heating Btu	Volts Rated	Cooling Amps	Cooling Watts	Heating Amps	Heating Watts	Energy Efficiency Ratio EER	Estimated Yearly Energy Cost	COP	Moisture Removal Pints/HR	CFM	Sleeve	Net Weight Lbs.	Ship Weight Lbs.
<b>WALLMASTER®</b>															
<b>Cool only</b>															
★ WS08C10D	8000	-	115	6.4	769	-	-	10.4	\$69	-	1.2	250	WSE	93	97
★ WS10C10D	9700	-	115	8.2	990	-	-	9.8	\$89	-	2.4	260	WSE	103	107
★ WS12C10D	11500	-	115	11.5	1174	-	-	9.8	\$106	-	3.1	295	WSE	112	116
★ WS10C30D	10000/9800	-	230/208	4.5/4.9	1020/1000	-	-	9.8/9.8	\$92	-	1.5	260	WSE	101	105
★ WS12C30D	11500/11200	-	230/208	5.5/6.0	1174/1143	-	-	9.8/9.8	\$106	-	3.0	290	WSE	109	113
WS16C30	15600/15000	-	230/208	8.3/8.9	1835/1765	-	-	8.5/8.5	\$165	-	4.2	290	WSE	119	123
<b>Heat Pump</b>															
★ WY09C33D	9300/9000	7500/7500	230/208	4.3/4.6	949/918	3.9/4.1	833/833	9.8/9.8	\$85	2.6/2.6	2.1	260	WSE	103	107
WY12C33	12000/11800	9350/9200	230/208	6.1/6.4	1395/1372	4.8/5.1	1062/1010	8.6/8.6	\$126	2.5/2.6	2.6	275	WSE	111	115
<b>Cool with Electric Heat</b>															
WE10C33D	10000/9800	11000/9100	230/208	4.5/4.9	1020/1000	16.0/14.7	3550/2950	9.8/9.8	\$92	-	1.5	260	WSE	104	108
WE12C33D	11500/11200	11000/9100	230/208	5.5/6.0	1174/1143	16.0/14.7	3550/2950	9.8/9.8	\$106	-	3.0	290	WSE	107	111
WE16C33	15600/15000	11000/9100	230/208	8.3/8.9	1835/1765	16.0/14.7	3550/2950	8.5/8.5	\$165	-	4.2	290	WSE	119	123
<b>UNI-FIT®</b>															
<b>Cool Only</b>															
★ US08D10B	8000	-	115	7.4	810	-	-	9.8	\$73	-	2.2	260	USC	73	79
★ US10D10B	9800	-	115	9.2	1000	-	-	9.8	\$90	-	3.2	260	USC	78	84
★ US12D10B	11500	-	115	10.7	1170	-	-	9.8	\$106	-	3.8	TBD	USC	80	87
★ US10D30B	10000/9800	-	230/208	4.7/5.1	1020/1000	-	-	9.8/9.8	\$92	-	3.2	285	USC	78	86
★ US12D30B	11500/11200	-	230/208	5.4/5.8	1170/1140	-	-	9.8/9.8	\$106	-	3.8	260	USC	80	87
US14D30B	13000/12600	-	230/208	7.0/7.5	1530/1480	-	-	8.5/8.5	\$138	-	4.0	310	USC	87	94
<b>Cool with Electric Heat</b>															
UE08D11B	8000	3850	115	7.5	830	10.7	1230	9.6	\$77	-	2.2	260	USC	73	79
UE10D33B	10000/9800	11200/9200	230/208	4.7/5.2	1060/1040	15.3/14.0	3500/2900	9.4/9.4	\$96	-	3.2	285	USC	78	84
UE12D33B	11500/11200	11200/9200	230/208	5.6/6.0	1220/1190	15.3/14.0	3500/2900	9.4/9.4	\$110	-	3.8	290	USC	80	87

WallMaster Heat Pump heating information (shown in red) indicates heat pump heating performance. WallMaster Electric Heat heating information (shown in red) indicates electric heat strip performance. For WallMaster Heat Pump electric heating performance refer to corresponding WallMaster Electric Heat model.

#### WALLMASTER HEAT PUMP

**HEATING PERFORMANCE:** Change-over from heat pump operation to resistance operation on models indicated is automatic at a preset outside ambient temperature of approximately 35°F.

Calculate the heat loss of the space to be heated. As long as the heat loss does not exceed the resistance heating capacity rating of the unit, the heating performance will be satisfactory.

Note: all models will produce condensate. If condensate disposal is desired, an optional drain kit is available.

**DEFROST CONTROL:** Initiated at 30°F (outdoor coil temperature) and terminated at 43°F (outdoor coil temperature). During defrost, the compressor stops and the electric heat starts, then operates with the fan to maintain indoor comfort. Below 43°F, the unit remains in electric heat mode.

**DEFROST DRAIN:** Drain automatically opens at approximately 50°F to prevent condensate from freezing inside drain pan.

### Plug Face/ Circuit Rating

WallMaster® Model Number	Uni-Fit® Model Number	Circuit Rating Breaker or T-D Fuse	Plug Face (NEMA#)	Power Cord Length (ft.)	Wall Outlet Appearance
WS08C10D, WS10C10D, WS12C10D	US08D10B, UE08D11B, US10D10B, US12D10B	125V - 15A	5 - 15P	6	
WS10C30D, WS12C30D, WS16C30	US10D30B, US12D30B, US14D30B	250V - 15A	6 - 15P	4	
WE10C33D, WE12C33D, WE16C33, WY09C33D, WY12C33	UE10D33B, UE12D33B	250V - 20A	6 - 20P	4	

Power cords are located on front left of WallMaster models and on front right of Uni-Fit models.

Model	Carton Dimensions INCHES		
	Height	Width	Depth
<b>WallMaster®</b>			
WSE Sleeve	18"	27 1/4"	18"
Chassis	15 3/4"	26 1/2"	21"
<b>Uni-Fit®</b>			
USC Sleeve	17 7/8"	28"	19 1/4"
US Chassis	17 1/4"	27"	22 1/4"
UE Chassis	17"	27 1/4"	22"

Due to continuing research in new energy-saving technology, specifications are subject to change without notice. As an ENERGY STAR® partner, Friedrich Air Conditioning Co. has determined that the selected ENERGY STAR® models meet the ENERGY STAR® guidelines for energy efficiency. Your operating costs will depend on your utility rates and use. The estimated operating cost is based on a electricity cost of \$.12 per kWh. For more information, visit [www.ftc.gov/energy](http://www.ftc.gov/energy).



# FASTER COOLING & HIGHER ENERGY EFFICIENCY

Friedrich portables move easily from room-to-room to provide fast cooling and heating comfort.



NOTE: Unit not shown installed. Vent hoses must vent outdoors.

## Dual hose design for up to 40% faster cooling or heating and increased energy efficiency.

### Air Conditioner

#### 3-IN-1 SYSTEM:

Air conditioner, dehumidifier and fan.

### Heat Pump

#### 4-IN-1 SYSTEM:

Air conditioner, heater, dehumidifier and fan.

Heat pump operation is more efficient than other portables that rely on resistance heat.

Both systems remove up to 72 pts./day when used as a dehumidifier.



### ZoneAire®

Air Conditioner  
COOLING  
9300 and 11600 Btu  
**Up to 9.4 EER**

Heat pump  
COOLING  
13500 Btu  
**9.5 EER**  
HEATING  
10700 Btu  
**2.8 COP**

## Portable Air Conditioner and Heat Pump

### Comfort & Convenience

#### AIR CONDITIONER

- 3-IN-1 SYSTEM: Air conditioner, dehumidifier and fan
- Dual hoses for closed loop cooling and exhaust functions for up to 40% faster, more efficient cooling
- Self-evaporative condensate system means no bucket to empty
- Condensate overflow protection-the unit will automatically shut off if tank should become full. The unit can be drained through the water outlet drain
- 24-hour timer
- 3 fan speeds
- Washable, antimicrobial air filter
- Auto restart after power outage
- Stores easily in most closets

#### HEAT PUMP

- 4-IN-1 SYSTEM: Air conditioner, heater, dehumidifier and fan
- Dual hoses for closed loop cooling and exhaust functions for up to 40% faster, more efficient cooling
- Built-in drain pump to remove condensate (drain hose included)
- Self-evaporative condensate system means no bucket to empty
- Condensate overflow protection-the unit will automatically shut off if tank should become full. The unit can be drained through the water outlet drain
- 24-hour timer
- 3 fan speeds
- Washable, antimicrobial air filter
- Auto restart after power outage
- Stores easily in most closets




Use remote to select MODE, FAN SPEED, adjust TEMPERATURE and set the TIMER.




INSTALLS QUICKLY AND EASILY WITH THE INCLUDED WINDOW INSTALLATION KIT.

### Superior dual-hose design



#### DUAL HOSE

Only indoor air is conditioned and returned into the room. Indoor air is not vented outside and wasted. The room is cooled up to 40% faster with greater energy efficiency.



#### SINGLE HOSE

Relies on air 'leakage' around doors and windows to make up for air volume lost as indoor air is exhausted outside. Inefficient-both indoor air and removed heat are exhausted.

### Ideal for areas with added heat loads and for cooling emergencies



NOTE: Air conditioners will provide cooling at outdoor temperatures down to 41° F and heat pumps will provide heating at outdoor temperatures down to 14° F with single hose installation.

## Features/Installation/Specifications

### Ideal Applications

- Supplemental or emergency cooling or heating anywhere
- Temporary cooling in computer rooms
- Guard buildings
- Construction trailers/RVs
- Workshops and garages
- Home offices
- Dorm rooms
- Bedrooms, attics and basements
- Sunrooms/enclosed patios

### Installation Features

- Plugs into standard 115 volt outlet
- Easy-roll casters for portability
- All installation accessories included
- Window kit fits both vertical and horizontal standard and some casement slider windows
- 6 ft. long power cord

### Installation Kit

INSTALLATION KIT- Dual intake and exhaust hoses. Flexible, heavy duty intake/exhaust hoses extend from 24" to 60". The hoses can be vented through a window or through a wall opening to the outside.

WINDOW SLIDER KIT (Included)



Fits HORIZONTAL or VERTICAL WINDOWS  
WINDOW OPENING:

Minimum: 26"\* Maximum: 46"

\* Window slider kit can be trimmed to fit a smaller opening.

Model		P09B	P12B	PH14B
<b>PERFORMANCE</b>				
Cooling Capacity	Btu	9300	11600	13500
Heating Capacity	Btu	—	—	10700
Energy Efficiency Rating	EER	9.4	8.8	9.5
Coefficient of Performance	COP	—	—	2.8
Air Movement	CFM	212	235	250
Moisture Removal	Pts/hr.	5.0	6.0	6.0
<b>SPECIFICATIONS</b>				
Refrigerant Type		R-410A		
Power Supply	Volts	115		
Rated Current	Cooling Amps	10.8	11.5	10.8
	Heating Amps	—	—	10.8
Watts		989	1318	1421/1120
Dimensions (Inches)	W x H x D	19 1/2 x 33 1/2 x 15 1/2		
Weight (Net/Shipping)	Lbs.	71/89	72/90	78/95
Carton Dimensions (Inches)	W x H x D	20 7/8 x 43 1/8 x 16 3/4		

Model	Circuit Rating Breaker or T-D Fuse	Plug Face (NEMA#)	Wall Outlet Appearance	Power cord length
P09B, P12B, PH14B	125V - 15A	5 - 15P		6 ft.

Due to continuing research in new energy-saving technology, specifications are subject to change without notice.

NOTE: Air conditioners will provide cooling at outdoor temperatures down to 41° F and heat pumps will provide heating at outdoor temperatures down to 14° F with single hose installation.



## Hazardous Location Room Air Conditioners

UL LISTED FOR CLASS 1, DIVISION 2,  
GROUPS A, B, C AND D HAZARDOUS LOCATIONS.



### Extreme A/C for Hazardous Conditions

Hazardgard® is specifically designed to cool living quarters, storage areas and other enclosures situated in hazardous locations, where specific volatile flammable liquids or gases are handled or used within enclosed containers or systems.

Hazardgard meets T4 temperature classification which means unit surface temperatures will not rise above 135° C/275° F. (note: 50/60Hz model listed as T4A for surface temperatures to 120° C/248° F). Operates at low ambient conditions without freezing at outdoor ambient temperatures as low as 7° C/45° F. Tolerates higher outdoor temperatures up to 55° C /130° F.

Equipment is certified in accordance with ISA 12.12.01 and NFPA 70 (National Electric Code)

ARTICLE 501

Class I, Div. 2, Group A and Group B

Class I, Div. 2, Group B

Class I, Div. 2, Group C

Class I, Div. 2, Group D

ARTICLE 505

Class I, Zone 2, Group IIC

Class I, Zone 2, Group IIB  
plus hydrogen, or "+H2"

Class I, Zone 2, Group IIB

Class I, Zone 2, Group IIA

Equipment is certified in accordance with ANSI/UL 484 and SASO 2681

### Hazardgard®

60 Hertz models  
North America

14000 to 24000 Btu  
**Up to 9.7 EER**

50 Hertz models  
International

19100 to 19500 Btu  
**Up to 9.0 EER**

50-60 Hertz model  
International-North America

50 Hertz  
21000/20500 Btu  
**8.1/8.5 EER**

60 Hertz  
24000/23700  
**8.8/8.5 EER**




# Applications

## Built to perform in the harshest environments

- Offshore oil rigs, on-shore oil company offices and refineries
- Petrochemical sites and propane fill-up stations
- Paint and varnish storage or processing plants
- Grain alcohol processors or storage sites
- Plant areas using strong solvents or chemicals
- Munitions plants or armories
- PVC or plastics plants and processing points
- Recycling plants
- Furniture refinishing/stripping workshops
- Fertilizer plants
- Office complexes where methane is a by-product
- Hazardous materials storage
- Container labs
- For analyzer houses/shelters

# Features

- Permanent split capacitor motor
- Hermetically sealed refrigeration system
- Environmentally sealed on/off switch and gold plated contacts in thermostat for corrosion resistance
- Solid-state control relays for compressor and fan operation
- Hot gas bypass allows the air conditioner to operate at low ambient conditions without freezing at outdoor temperatures as low as 45° F (7°C)
- Hermetically sealed reciprocating compressor is cooled during the refrigeration cycle, which allows the unit to tolerate higher outdoor temperatures up to 130° F (55°C)
- Larger, commercial grade, enclosed fan motor with hermetically sealed overload for arc-free operation. Totally enclosed to assure efficient operation under adverse electrical conditions
- Unit utilizes field supplied, direct-wired, 15-amp circuit with time-delay fuse that will tolerate current surge without tripping the breaker
- 22-gauge, G60 steel air conditioner cabinet is powder coated for corrosion protection and to withstand years of hard use
- High density EPS foam insulation for thermal resistance and sound control
- Heavy duty hexacomb packaging resists damage during shipment and is environmentally friendly



## COILS COATED FOR CORROSION RESISTANCE

### MODEL SH24M20

- ElectroFin® 5-stage, immersion ecoat process on 100% of metallic surfaces on the outdoor coil provides outstanding corrosion resistance protection in coastal or corrosive environments

#### ELECTROFIN BENEFITS:

- Excellent adhesion characteristics
- Less than 1% thermal degradation
- Outstanding chemical resistance
- Passed 6048 hrs.ASTM B-117 Salt Spray

## 5-stage ecoat



#### ELECTROFIN MEETS THE FOLLOWING:

- MIL-C-46168 Chemical Agent Resistance -DS2, HCl Gas
- CID A-A-52474A (GSA)
- MIL-STD 810F, Method 509.4 (Sand and Dust)
- MIL-P-53084 (ME)-TACOM Approval
- MIL-DTL-12468 Decontamination Agent (STB)
- DPG (Douglas Proving Grounds) Soil & Water Exposure Tests
- GM9540P-97 Accelerated Corrosion Test (120 cycles)
- ASTM B117-G85 Modified Salt Spray (Fog) Testing-2,000 hours
- ASTM B117 Salt Spray (tested by ARL for Lockheed Martin)

### MODELS SH15M30A, SH20M30A, SH20M50A

- Diamonblue Advanced Corrosion Protection® on the outdoor coil protects the coil against deterioration and extends the life of the unit especially in coastal or corrosive environments



# Specifications

Model	Electrical Characteristics				Energy Efficiency Ratio EER	Moisture Removal Pints/HR	Air Direction Controls	Air Circulation CFM	Refrigerant
	Cooling Capacity Btu/Hr.	Volts Rated	Cooling Amps	Cooling Watts					
<b>60 HERTZ - NORTH AMERICA</b>									
SH15M30A	14500/14000	230/208	6.9/7.5	1495/1443	9.7/9.7	4.0	8-way	375	R-410A
SH20M30A	20000/19000	230/208	8.7/9.6	2125/2021	9.4/9.4	5.5	8-way	375	R-410A
SH24M20	24000/23700	230/208	12.6/13.5	2727/2788	8.8/8.5	8.0/7.5	8-way	385	R-401A
<b>50 HERTZ - INTERNATIONAL</b>									
SH20M50A	19500/19100	240/220	9.8/10.3	2167/2156	9.0/9.0	5.6/5.5	8-way	425	R-410A
SH24M20	21000/20500	240/220	15.0/13.2	2600/2412	8.1/8.5	7.0/7.0	8-way	360	R-410A


# Installation Information

Model	Dimensions INCHES						Window Width INCHES		In-Wall Installation Finished Hole INCHES			Circuit Rating Breaker or T - D Fuse	Weight Lbs.	
	Height	Width	Depth with Front A	Depth J Box to Louvers B	Minimum Extension Into Room	Minimum Extension Outside	Min.	Max.	Height	Width	Max. Depth C	Volts - Amps	Net	Shipping
SH15M30A	15 15/16"	25 15/16"	27 3/8"	6"	3 1/16"	16 15/16"	27 7/8"	42"	16 3/16"	26 3/16"	6"	250V-15	140	167
SH20M30A	17 15/16"	25 15/16"	27 3/8"	6"	3 1/16"	16 15/16"	27 7/8"	42"	18 3/16"	26 3/16"	6"	250V-15 (230V) 250V-20 (208V)	166	170
SH20M50A	17 15/16"	25 15/16"	27 3/8"	6"	3 1/16"	16 15/16"	27 7/8"	42"	18 3/16"	26 3/16"	6"	250V-15	171	175
SH24M20	17 15/16"	25 15/16"	27 3/8"	6"	3 1/16"	16 15/16"	27 7/8"	42"	18 3/16"	26 3/16"	6"	250V-30	180	185

Due to continuing engineering research and technology, specifications are subject to change without notice. Manufactured under U.S. Design Patent DES 368, 306 decorative front; Utility Patent 5, 622, 058. MAXIMUM outdoor ambient operating temperature is 130°F. (55°C) MAXIMUM TEMPERATURE RATING FOR CLASS I, DIVISION 2, GROUPS A,B,C,D.

For global applications, Hazardgard cooling capacities are tested in a certified laboratory at moderate (T1\*) and hot (T3\*) climate conditions in accordance with SASO (Saudi Arabian Standards Organization) Standard 2681. SASO Standard 2681 is adopted from ISO Standard 5151 for testing and rating for performance of non-ducted air conditioners and heat pumps.

\* Capacity and efficiency values at each climate conditions are available upon request.

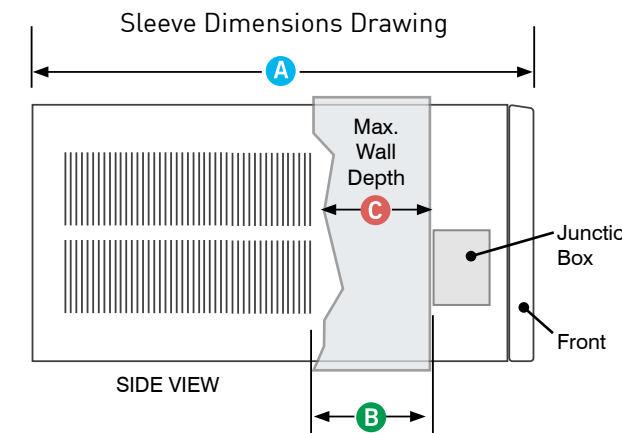

NOTE: Hazardgard unit must be hard-wired.



Friedrich air conditioners can be found in some of the world's toughest locations. Oil companies rely on us to cool offshore oil rigs in the most extreme conditions.







**FRIEDRICH**

1 8 8 3