

INCA IN-LIGHT INSERT RANGE HOOD




INSERT VENTILATION TO PAIR WITH CURRENT KITCHEN TRENDS. An elegant, built in flush mounted range hood with a depth of 11 ¼ making it an ideal choice for shallow depth cabinetry and perfect for kitchen remodeling projects. The sleek stainless steel panel mounts flush for a clean fully integrated look and can be accented with a liner accessory.



AVAILABLE MODELS

Model #	Size / Color	Motor Class (CFM)	Sound Levels (sones)
INLT28SS600	28 Stainless	600 CFM	2.8 - 7.5 sones

KEY FEATURES



Backlit electronic controls

Backlit electronic controls with a White LED light to indicate the current speed and two level lighting



LED Light Bar

Low consumption 1 watt LED bulbs with a dimmer light up your cooking but use very little energy

Perimeter Aspiration

Air is forced through narrow slots around the perimeter of the center panel greatly improving contaminant extraction.



Remote Control (INCLUDED)

Control all features of the hood from the convenience of a wireless remote control

SPECIFICATIONS

cut out dimensions	26 9/16" w x 10 1/4" d
convertible to ductless / recirculating	yes – kit purchase separately
body depth height	11 1/14" 12 1/8"
controls	4 speed electronic w/ white LED
lighting	LED light bar
ducting top	6" round
grease filters	dishwasher safe mesh
perimetric filtration system	yes
10 minute intensive speed	yes
15 minute auto shut off	yes
ADA compliant	yes - remote included
power cord included	yes
AC power	400 watts / 3.2 amps

PERFORMANCE

SPEED	1	2	3	BOOST
CFM	150	300	450	560
Sones	2.8	4.3	6.0	7.5

ACCESSORIES

#CFMRED –
CFM Reducer Kit*

For use in make up air areas where an under 300 cfm hood is required. This kit reduces the ducting to 5" round and reduces the cfm to under 300.

CFMRED2 –
CFM Reducer Kit*

**For use in make up air environments
where an under 400 cfm hood is required.
This kit reduces the ducting to 5" round
and reduces the cfm from 600 to under
400.**

FILTER1 – Charcoal Filter Kit

High quality charcoal filter for use when recirculating the air back into the kitchen. Filters out odor and should be replaced every 6 months

FILTER1LL –
Long Lasting Charcoal Filter Kit

New washable charcoal filter can be recharged and washed up to 8 times. For use when recirculating the air back into the kitchen. Filters out odor and can last up to 4 years.

LINE30ST / LINE36ST – Stainless Steel Liner 30 & 36"


Create a perfectly-sealed, non-combustible 4" tall perimeter to "line" the wood below the hood. Depth adjustable from 16" - 17 7/8" .

MUDAMPER6 / MUDAMPER8 – Universal Make-Up Air Damper


Satisfies make-up air requirements, this kit uses an air switch to activate the make-up air damper to open and bring fresh air into the home when the hood fan is on. It then closes tightly when the hood is off. The CFM level is not reduced with this accessory.

WIREBOX – Fixed Wiring Box


Replace the power cord with a hard wired box to power the range hood

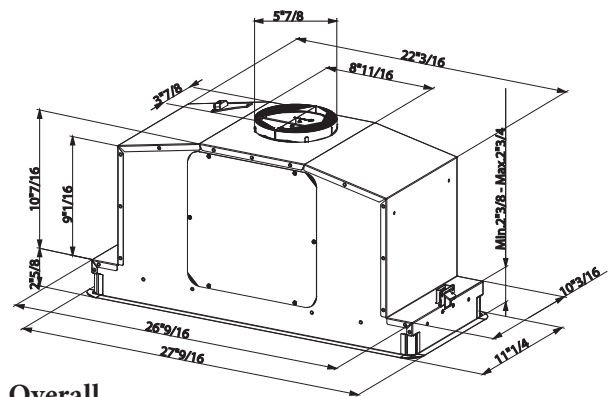


Overall

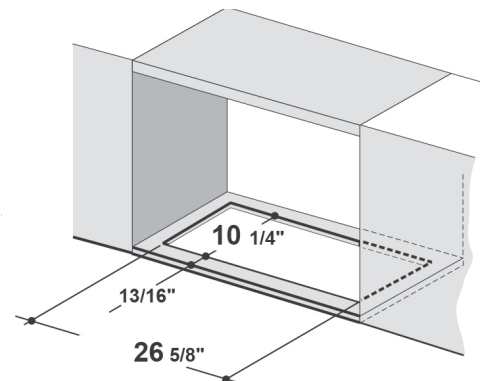

Cut Out

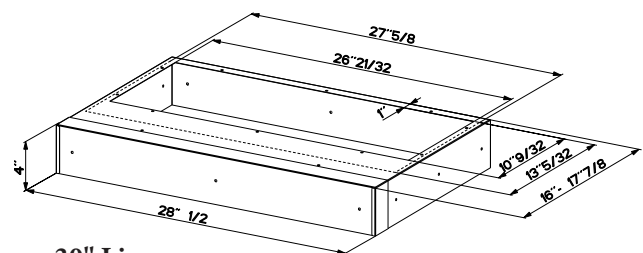

30" Liner

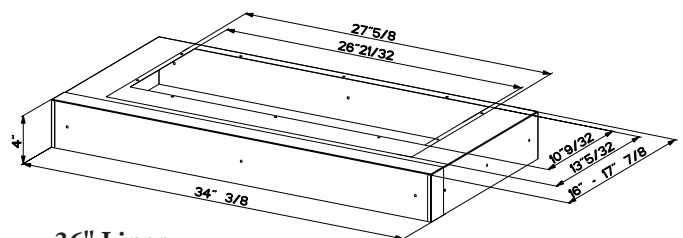

36" Liner



WARNING! Product specifications are subject to change without notification. Consult the installation instructions before you begin installing this range hood. * Check local make up air codes for guidelines.



Imagined in Italy