



Color Variants
RC462700
fully integrated
Niche width 24" (61 cm), Niche height 84" (213.4 cm)

Included accessories
1 x egg box with lid.

Product Variants
RC472700
Refrigerator column 400 series
fully integrated
Niche width 30" (76.2 cm), Niche height 84" (213.4 cm)

RC462700
Refrigerator column 400 series
fully integrated
Niche width 24" (61 cm), Niche height 84" (213.4 cm)

- Stainless steel interior
- Generous lighting concept
- Solid aluminum door bins
- Net volume 13.1 cu.ft. (370 liters)
- Temperature control drawer (32 °F to 37 °F)
- One motorized glass shelf, adjustable when fully loaded
- Energy star® qualified

Operation
Electronic precision temperature control with digital temperature display.

Technical features
Dynamic cool air distribution with Multi-Flow Air system.
Automatic defrosting with defrost water evaporation.
Activated charcoal air filter.
Energy-saving vacation mode.
Open-door and malfunction warning system.

Cooling compartment
Net volume 13.1 cu.ft. (314 liters).
No-frost technology with fast cooling.
Temperature adjustable from 35 °F to 46 °F (+2 °C to +8 °C).
Four safety glass shelves (one is motorized, two are manually adjustable).
Two fully extendable drawers (low and high) with transparent front.
Bright interior lighting with two ceiling spotlights and two halogen light pillars on the side.
3 height adjustable door bins, one of which is a large gallon door bin.
One door bin with transparent front flap.

Temperture control drawer
Net volume 2 cu. ft. (56 liters).
Separate automatic temperature control with settings for poultry, fish, meat and produce.
A large, fully-extendable drawer with transparent front and integrated lighting.


Consumption data
Energy consumption 0.762 kwh/24 h.

Planning notes
Flat hinge.
Door hinge right, reversible.
Door opening angle of 115°, optional 90° door stop.
Plan the power outlet and water connection behind the appliance per installation instructions.
Connecting cable 78 3/4" with plug.


Rating
120 V / 60 Hz
Total Amps: 15 A
Total connected load 0.18 kW.
Max. door panel weight 21 kg.

Product Features
Multi-Flow Air Tower
Yes
SUPERCOOL
Yes
SUPERFREEZE
No
Carbon Air Filter
No
Temperature Controlled Drawer
Yes
Humidity Control Drawer
Yes
Number of Door Bins - Refrigerator
2
Adjustable Door Bins - Refrigerator
No
Tilt-Out Door Bins - Refrigerator
Yes
Gallon Storage Bins
1
Number of Shelves - Refrigerator
4
Door Hinge
Right reversible
Adjustable Shelves - Refrigerator
3
Number of Shelves - Freezer
Reversible Door Hinge
Yes
Adjustable Shelves - Freezer
No

Consumption and connection features
UPC code
825225847762
Color / Material housing
Colour.Material door
Panel ready
Silence level (dBA)
39
Watts (W)
180
Current (A)
15
Volts (V)
120
Frequency (Hz)
60
Energy consumption (kWh/yr)
278.13
Energy Star® qualified
Yes
Approval certificates
ETL, ETL C
Power cord length (in)
78 3/4"
Required cutout size (HxWxD) (in)
84" x 24" x 24 3/4"
Appliance Width (in)
23 3/4 "
Height (in)
83 3/4 "
Depth (in)
24"
Capacity in 0.75l (bordeaux bottles)
Total unit gross capacity (cu. ft.) - AHAM
13
Product packaging dimensions (HxWxD) (in)
89.76 x 27.16 x 29.13
Refrigerator Gross capacity (cu. ft.)
13
Freezer Gross capacity (cu ft)
Net weight (lbs)
390
Gross weight (lbs)
425
SKU
RC462700

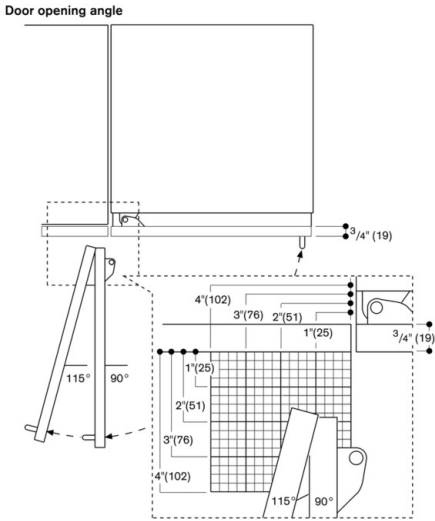

The space required for the hinge and the consequential distance to the adjacent unit and its handle can be seen in the above drawing, depending on the thickness. The drawing assumes a panel thickness of 19 mm.

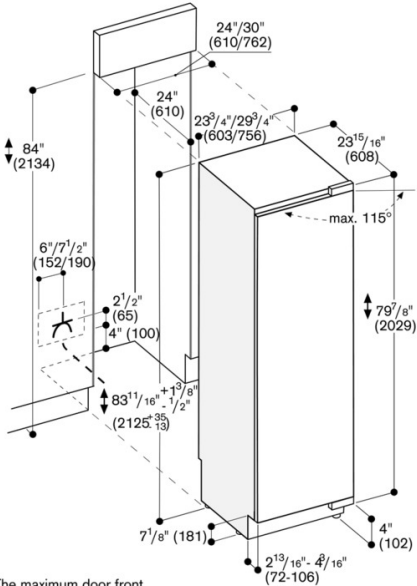

The maximum door front measurements are designed for a gap measurement of 3 mm.

