



Color Variants

VI414610

Stainless steel frame

Width 15 "

Optional accessories

WP400001

Wok pan made of multiple-layer material

WZ400001

Wok ring attachment for wok pan

VI414610

Vario induction wok 400 series

Stainless steel frame

Width 15 "

11" cooking zone with 3,600 W booster function
Ideal for the original round-bottomed wok. Wok ring attachment optional.
Solid stainless steel control knob
Precision crafting of 1/8-inch stainless steel
For surface mount installation with a visible edge or for flush installation
Can be perfectly combined with other Vario 400 series products

Cooking zones

One \varnothing 7 1/16" induction cooking zone (1,800 W with booster 2,500 W), which automatically expands to \varnothing 11" (2,800 W, with booster 3,600 W).

Operation

Control knobs with illuminated ring, cooking zone and output level markings.
Electronic control in 12 output levels.

Features

Cooking zone marking.
Booster function for each cooking zone.
Pan detection (it also automatically switches on the outer cooking zone).
Short-term timer.

Safety

Residual heat indication.
Safety lock.

Planning notes

Depending on the type of installation - surface-/ or flush-mounted, with or without cover - the specific location of the control knob positions may vary.
When using the appliance cover VA 440 or adjustment strip VA 450 additional space for cut-out depth needs to be considered.

In a combination of Vario cooktops with at least one appliance cover, the adjustment strip VA 450 is required.
In a combination of several Vario 400 series cooktops a connection strip must be used. Depending on the type of installation - surface-/ or flush-mounted, with or without cover - the respective VA 420 connecting strip must be used.

For flush installation the edge height in the cut-out needs to be at least 1/2" and for surface-mount 3/8". Ensure a continuous cut surface of 90°.

The weight capacity and stability, especially in case of thin countertops, must be supported using suitable substructures. Take the appliance weight and additional loads into account.

Flush installation is possible in countertops made of stone, synthetics or solid wood. Heat resistance and watertight sealing of the edges must be observed. For other materials, please consult with your countertop manufacturer.

The groove must be continuous and even, so that uniform placing of the appliance on the gasket is ensured. Do not use discontinuous lining.

The joint width may vary due to size tolerances of the combinations and of the countertop cut-out.

If installing several Vario products in individual cut-outs allow for a minimum distance of 2" inbetween the cooktops.

Product Features

Product name / series name

Vario/Domino cooking zone cera

Construction type

CONSTR_TYPE.Built-in

Energy source

Electric

Total number of cooktop burners

1

Required cutout size (HxWxD) (mm)

90 x 360 x 490-500

Width of the product (mm)

380

Overall appliance dimensions (HxWxD) (mm)

90 x 380 x 520

Net weight (kg)

5.0

Gross weight (kg)

8.0

Residual heat indicator

Separate

Location of control panel

External control

Basic surface material

Ceramic

Color of surface

Black, Stainless steel

Color of frame

Stainless steel

Approval certificates

CSA

Power cord length (cm)

96

Consumption and connection features

Watts (W)

3600

Gas connection rating (W)

16

Current (A)

16

Volts (V)

208-240

Frequency (Hz)

60; 50

2016-10-07

Page 1

Operates with magnetic (induction) iron pots and pans only. For an optimal heat distribution, the use of sandwich bottom cookware is recommended. Built-in control panel can be integrated in the bottom cabinet at drawer level. Front panel thickness 5/8" - 1".

The details below must be observed if the panel is more than 1" thick (there must be a recess at the rear for proper control module installation).

Appliance clicks into place when inserted into the countertop from above.

Rating


Total rating 3.6 kW.

Total Amps: 16 A.

208 - 240 V / 60 Hz

Connecting cable 39" without plug (hardwire required).

Installation with appliance cover/adjustment strip;
 surface installation

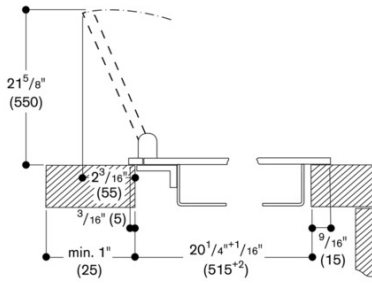

Installation with appliance cover/adjustment strip;
 Flush Installation

