

Color Variants
VI424610
Stainless steel frame
Width 15 "

VI424610
Vario induction cooktop 400 series
Stainless steel frame
Width 15 "

2 cooking zones with booster function
Total output 3,600 W
Solid stainless steel control knob
Precision crafting of 1/8-inch stainless steel
For surface mount installation with a visible edge or for flush installation
Can be perfectly combined with other Vario products of the 400 series

Cooking zones
 One ø 8 1/4" induction cooking zone (2,200 W, 3,300 W with booster).
 One ø 5 7/8" induction cooking zone (1,400 W, 1,800 W with booster).

Operation
 Control knobs with illuminated ring, cooking zone and output level markings.
 Electronic control in 12 output levels.

Features
 Cooking zone marking.
 Booster function for each cooking zone (only one zone at a time can be operated with booster function)
 Pan detection.
 Short-term timer.

Safety
 Individual residual heat indication.
 Safety lock.

Planning notes
 Depending on the type of installation - surface-/ or flush-mounted, with or without cover - the specific location of the control knob positions may vary.
 When using the appliance cover VA 440 or adjustment strip VA 450 additional space for cut-out depth needs to be considered.
 In a combination of Vario cooktops with at least one appliance cover, the adjustment strip VA 450 is required.
 In a combination of several Vario 400 series cooktops a connection strip must be used. Depending on the type of installation - surface-/ or flush-mounted, with or without cover - the respective VA 420 connecting strip must be used.
 For flush installation the edge height in the cut-out needs to be at least 1/2" and for surface-mount 3/8". Ensure a continuous cut surface of 90°.
 The weight capacity and stability, especially in case of thin countertops, must be supported using suitable substructures. Take the appliance weight and additional loads into account.
 Flush installation is possible in countertops made of stone, synthetics or solid wood. Heat resistance and watertight sealing of the edges must be observed. For other materials, please consult with your countertop manufacturer.
 The groove must be continuous and even, so that uniform placing of the appliance on the gasket is ensured. Do not use discontinuous lining.
 The joint width may vary due to size tolerances of the combinations and of the countertop cut-out.
 If installing several Vario products in individual cut-outs allow for a minimum distance of 2" inbetween the cooktops. Operates with magnetic (induction) iron pots and pans only. For an optimal heat distribution, the use of sandwich bottom cookware is recommended.

Product Features
Product name / series name
 Vario/Domino cooking zone cera
Construction type
 CONSTR_TYPE.Built-in
Energy source
 Electric
Total number of cooktop burners
 2
Required cutout size (HxWxD) (mm)
 90 x 360 x 490-500
Width of the product (mm)
 380
Overall appliance dimensions (HxWxD) (mm)
 90 x 380 x 520
Net weight (kg)
 7.0
Gross weight (kg)
 10.0
Residual heat indicator
 Separate
Location of control panel
 External control
Basic surface material
 Ceramic
Color of surface
 Black, Stainless steel
Color of frame
 Stainless steel
Approval certificates
 CSA
Power cord length (cm)
 96


Consumption and connection features
Watts (W)
 3600
Gas connection rating (W)
Current (A)
 16
Volts (V)
 208-240
Frequency (Hz)
 60; 50

2016-10-07
Page 1


Built-in control panel can be integrated in the bottom cabinet at drawer level. Front panel thickness 5/8" - 1". The details below must be observed if the panel is more than 1" thick (there must be a recess at the rear for proper control module installation). Appliance clicks into place when inserted into the countertop from above.
 Appliance weight: approx. 22 lb.

Rating
 Total rating 3.6 kW.
 Total Amps: 16 A.
 208 - 240 V / 60 Hz
 Connecting cable 39 " without plug (hardwire required).


Control knob installation, surface-mounted installation

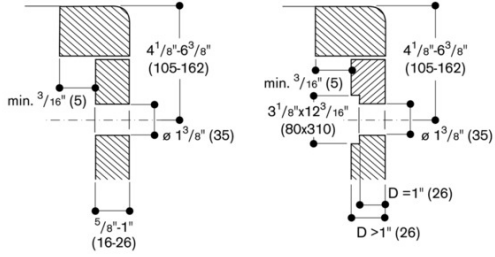

Control knob installation, flush-mounted installation

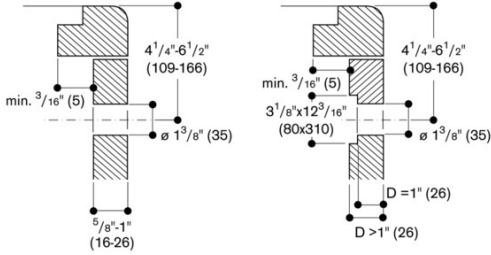


View from above




* with appliance cover or adjustment bar
 (observe front and rear asymmetrical assembly,
 see separate notes "assembly with
 appliance cover/adjustment bar").


Longitudinal section

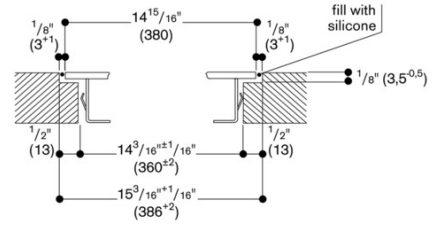

Cross-section

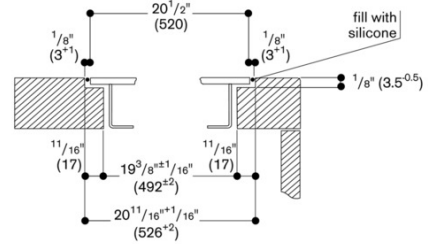


For installation with appliance cover or adjustment bar, observe
 the deeper notch and the slot width front and back.

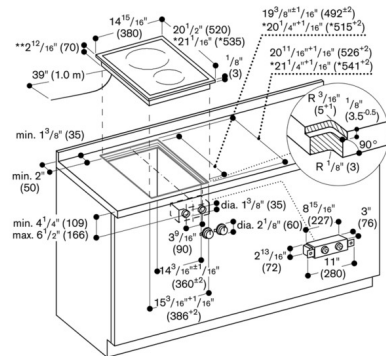

* with appliance cover or adjustment strip.
 See separate planning notes.
 ** 3 1/16 inches (93) in the area of the wire connection (rear, right).

Installation with appliance cover/adjustment strip;
 surface installation

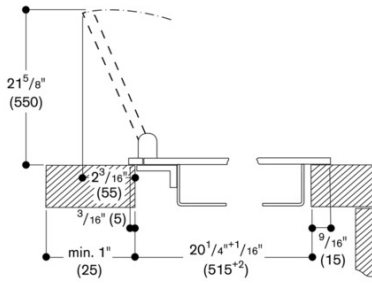

Installation with appliance cover/adjustment strip;
 Flush Installation

