



MOM FRIENDLY. DAD READY.™



User Manual / Installation Instructions

Lynx™ Quick Disconnect Hose (LQD)

(Recommended for Freestanding Grills only)



WARNING:

Failure to follow instructions may result in explosion or fire causing serious injury or death.



GAS CONNECTORS ARE TO BE INSTALLED BY A QUALIFIED GAS SERVICE TECHNICIAN ONLY. INSTALL ACCORDING TO LOCAL CODES OR NFPA54, NFPA58, CGA B149 OR OTHER APPLICABLE GAS STANDARD.

MAXIMUM WORKING TEMPERATURE FOR THESE FLEXIBLE LP GAS AND NATURAL GAS CONNECTORS (UNLESS OTHERWISE STATED) IS 50° C(125° F).

FLEXIBLE GAS CONNECTORS MUST NOT BE INSTALLED IN CLOSE PROXIMITY TO ANY HEAT SOURCE.

ALL ANSI Z21.54 HOSE REGULATIONS HAVE A MAXIMUM WORKING TEMPERATURE OF 93.5° C(200° F).

GAS CONNECTORS ARE TO BE INSTALLED BY A QUALIFIED GAS SERVICE TECHNICIAN IN A MANNER THAT DOES NOT AND WILL NOT EXCEED THE MAXIMUM WORKING PRESSURE THAT IS PRINTED ON THE CONNECTOR.


UPON QUALIFIED INSTALLATION OF THIS GAS CONNECTOR, INSPECT HOSE AND ATTACHED EQUIPMENT FOR DAMAGE. ALSO INSPECT HOSE ASSEMBLY FOR KINKING DUE TO IMPROPER BENDING AND/OR POTENTIAL PINCH POINTS.

CONNECTOR ASSEMBLY MUST BE OF ADEQUATE LENGTH FOR THE INTENDED INSTALLATION. FINAL ASSEMBLY MUST BE TESTED FOR LEAKS USING A LEAK TEST SOLUTION. RINSE WITH CLEARWATER AFTER LEAK TEST. IF A LEAK IS FOUND, TURN GAS SUPPLY OFF IMMEDIATELY. HAVE A QUALIFIED GAS SERVICE TECHNICIAN MAKE NECESSARY REPAIRS. DO NOT USE AN OPEN FLAME TO TEST FOR GAS LEAKS.

CONTACT AND POTENTIAL CONTACT WITH DAMAGING FOREIGN OBJECTS OR SUBSTANCE MUST BE AVOIDED.

PERIODIC VISUAL INSPECTION IS NEEDED TO ENSURE THAT THE CONNECTOR IS SUITABLE FOR CONTINUED USE.

WARNING: THIS PRODUCT CONTAINS CHEMICALS, INCLUDING LEAD, KNOWN TO THE STATE OF CALIFORNIA TO CAUSE CANCER AND BIRTH DEFECTS OR OTHER REPRODUCTIVE HARM. WASH HANDS AFTER HANDLING.

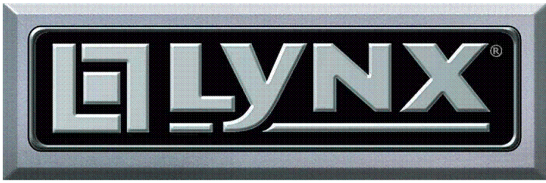



WARNING:

Failure to follow instructions may result in explosion or fire causing serious injury or death.



CAUTION: All adapters (unions) supplied with the connector must be used. Do not attempt to connect the fittings on the connector directly to the threaded rigid pipe ends on the equipment of the fuel gas piping system.

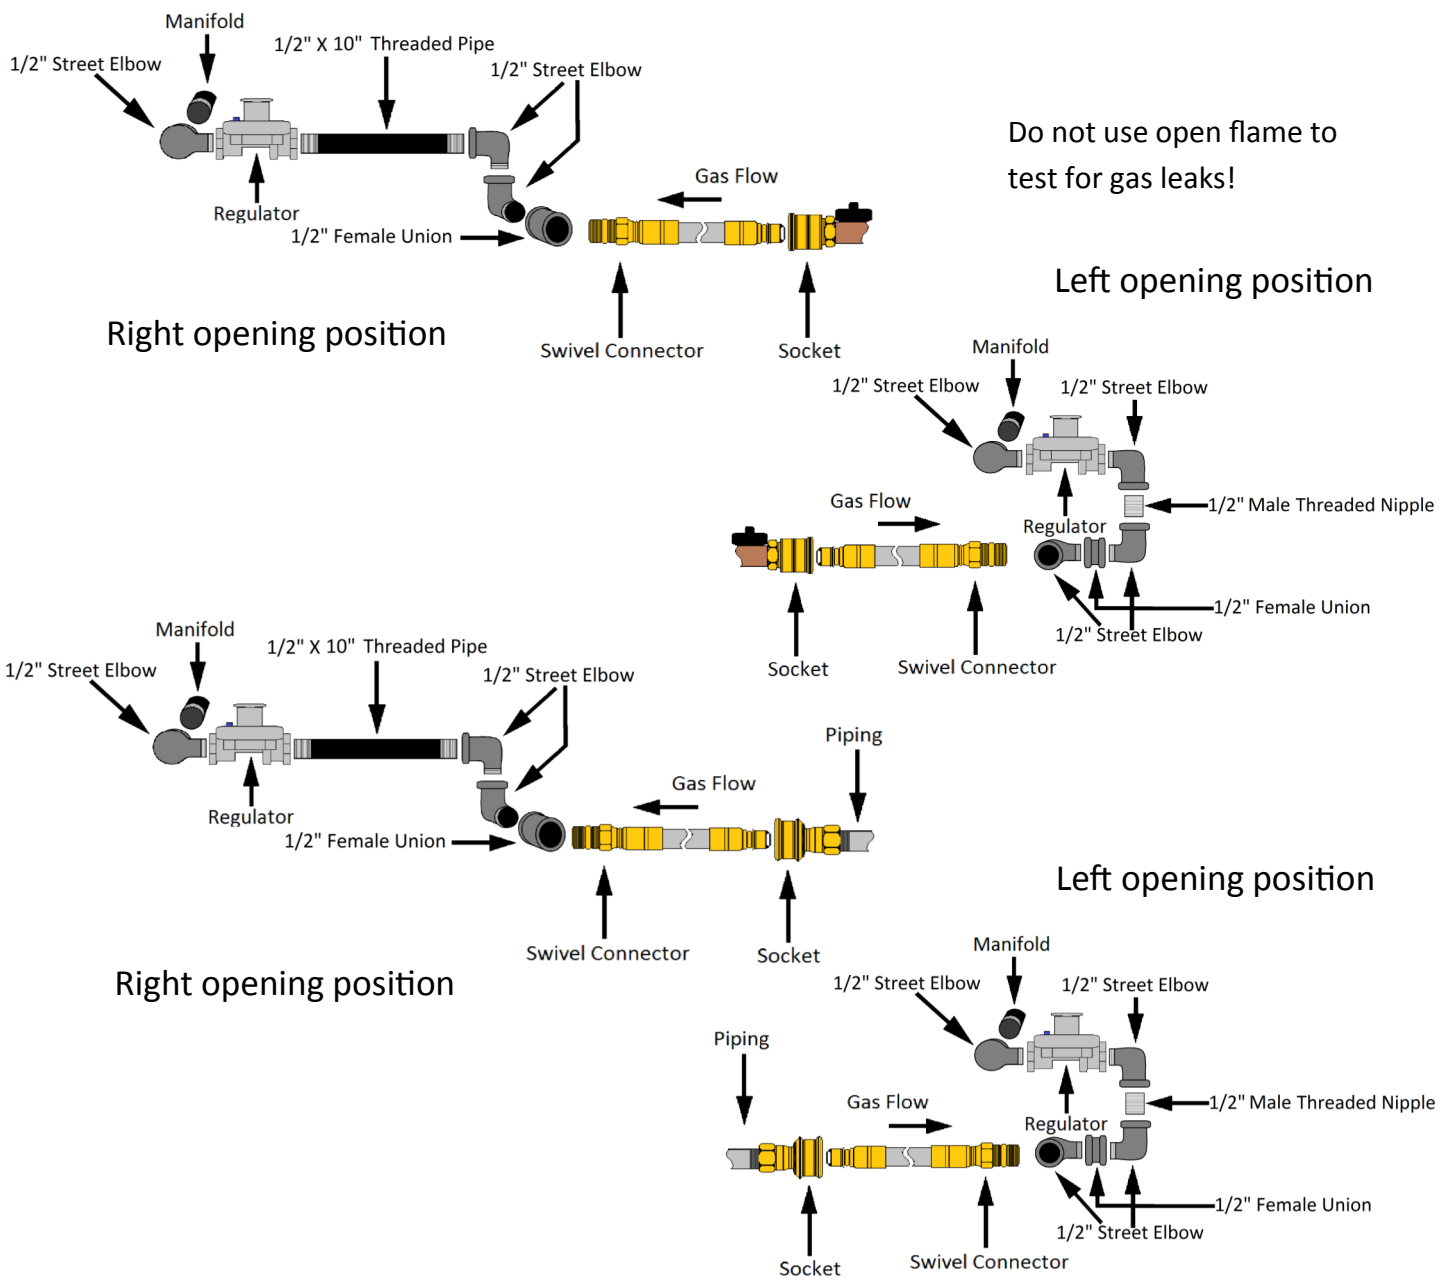

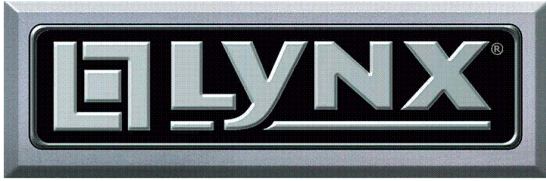

WARNING:

Failure to follow instructions may result in explosion or fire causing serious injury or death.



Instructions for Proper Usage and Installation (Appliance)

1. This connector is for freestanding Lynx™ outdoor appliances that are movable for convenience of operation.
2. Connectors are designed for movement after installation, but must not be kinked or twisted. This connector must be of adequate length for the application. Periodic visual inspection is needed to ensure that the connector is suitable for continued use.
3. Do not attach to any other hose to extend the total length of the hose.
4. Contact with damaging foreign objects or substances must be avoided.
5. For use with system pressures not to exceed 1/2 PSI (3.5 Kpa).
6. Test for leaks only with leak test solution and rinse with clear water after leak test.

Instructions for Proper Usage and Installation (Inlet)


1. Install socket inlet on the gas supply.
2. Install plug on the appliance connector.
3. Place knob or lever into “off” position, push back sleeve of socket (Fig. #1), Insert plug (fig. #2), and release sleeve.
4. Push plug until sleeve snaps forward locking plug in socket (Fig. #3). Turn knob or lever to “on” position to turn gas on.
5. Leak test with leak test solution.

WARNING:

This product contains chemicals, including lead, known to the state of California to cause cancer and birth defects or other reproductive harm. Wash hands after handling.

CAUTION:

Gas connectors are to be installed by a gas service technician only. Install according to local codes or NFPA 54 (ANSI Z223.1) National Fuel Gas Code.

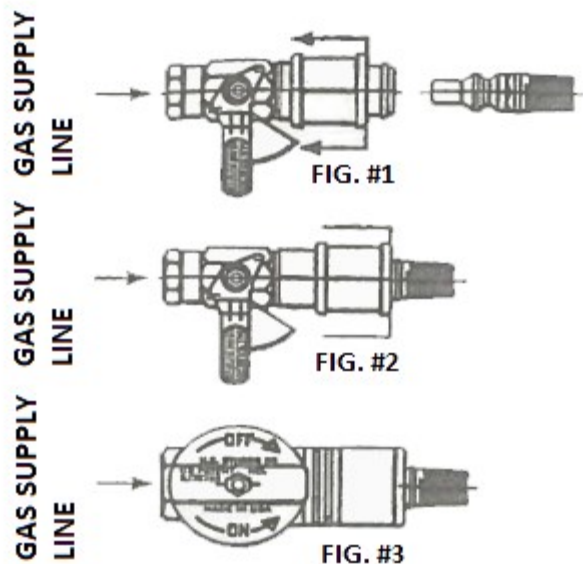

ANSI Z21.S4 CSA8.4



WARNING:

Failure to follow instructions may result in explosion or fire causing serious injury or death.




WARNING:


This product is not recommended for use in built in installations. Use of LQD in built in installations will void warranty of Lynx™ products.

LQD Hose must not come in contact with the firebox of the grill.

The LQD Hose must be outside of the grill cart and not be routed through the interior.

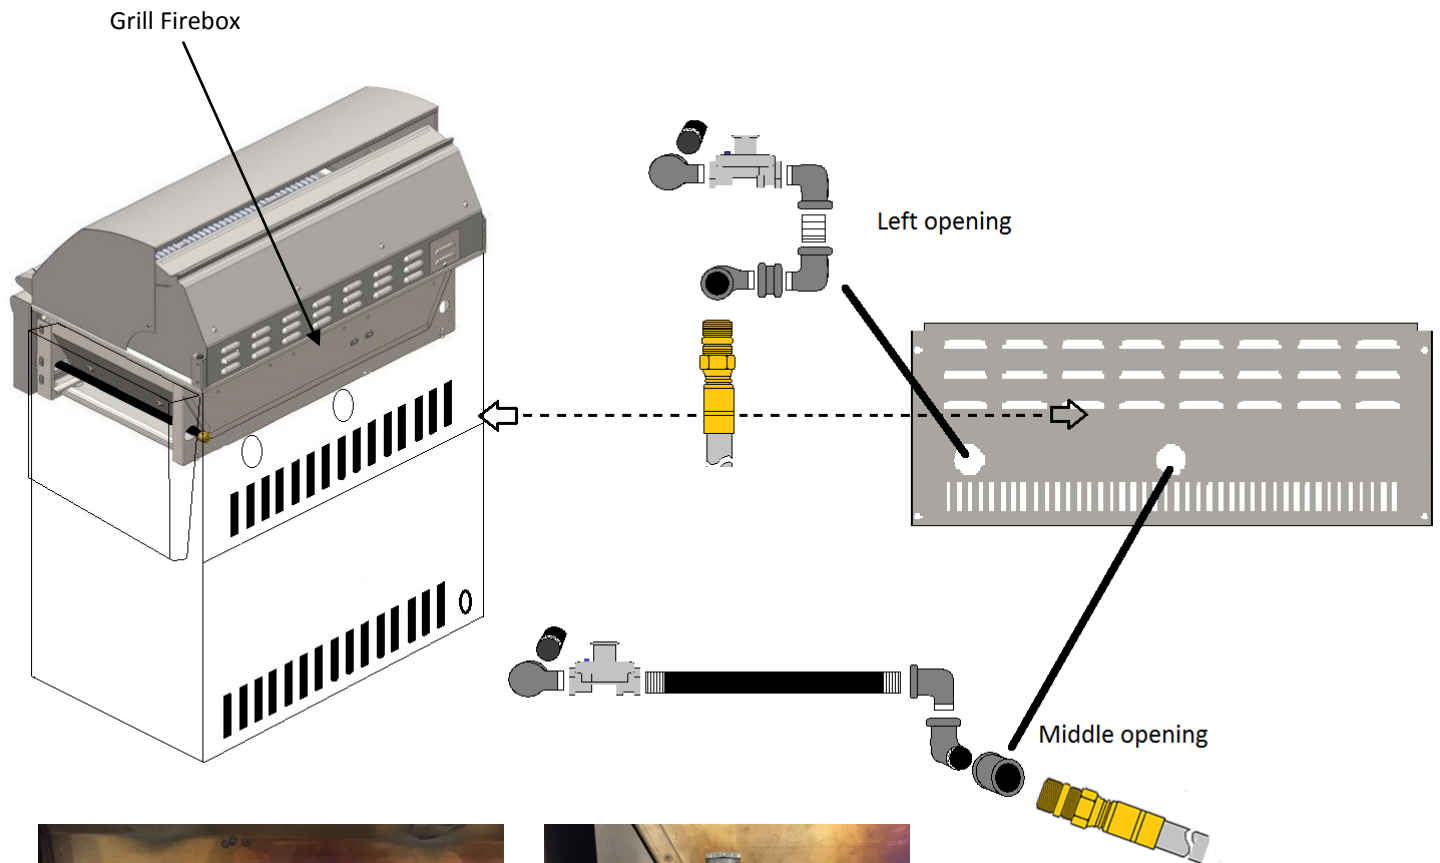

ANSI Z21.54 CSA8.4

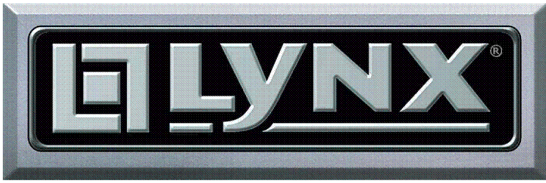

Lynx™ Quick Disconnect Hose

LQD



WARNING:

Failure to follow instructions may result in explosion or fire causing serious injury or death.



CAUTION: Make sure you READ and UNDERSTAND these instructions BEFORE installation. If you have any questions or concerns prior to, or during service, please call Customer Care/Tech. Support at 888-289-5969, Mon.– Fri. 6AM to 4:30PM, and Saturdays from 8AM to 1PM Pacific Time.

Lynx Grills, Inc.
7300 Flores Street
Downey, CA 90242

www.lynxgrills.com
Email us at
service@lynxgrills.com
©Lynx Grills, Inc.

Lynx Grills, Inc.
7300 Flores Street
Downey, CA 90242

For more information, please call:

1-888-289-5969 or visit www.lynxgrills.com

Email us at service@lynxgrills.com

©Lynx Grills, Inc.



MOM FRIENDLY. DAD READY.™

