



# The Next Necessity™



## Instant Hot Water Dispensers

# Model F-1000 Replacement Filter

For cleaner, fresher-tasting water


### Submittal Sheet

- Includes 1 replacement filter for use with InSinkEerator water filtration system
- Reduces particulates, chlorine taste and odor for clean, refreshing taste
- Sanitary, quick-change filter cartridge makes replacement easy. A simple twist is all it takes!
- Replace every 6 months at the rated capacity or if a noticeable reduction in flow rate occurs

### Specifications

Filter Capacity	500 gallons
Temperature Range	Incoming cold water supply line can be from 33°F to 100°F (1°C to 38°C). Connect to cold water supply line only.
Pressure	30-120 psi
Flow Rate	.75 gpm
Shipping Weight	Approximately 1.0 lbs.

### Dimensions

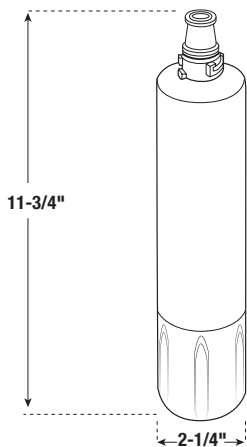

Tested & Certified by NSF International against NSF/ANSI Standard 42 in the following InSinkEerator Systems Only: GN1100, HC1100, GN2200, HC2200, GN2215, HC2215, H3300 or HC3300 for the reduction of claims specified on the Performance Data Sheet. For systems using two handle HC model faucets, operate only one handle at a time.

Pressure: 30-120 (207-827 kPa) psi  
 Temperature: 33°F - 100°F  
 Flow Rate: .75 gpm  
 Capacity: 500 gallons

**Filter Capacity:** 500 gallons, depending on local water conditions. Note that while the testing was performed under standard laboratory conditions, actual performance may vary. Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system. For cold water use only. Systems must be installed and operated in accordance with the Manufacturer's recommended procedures and guidelines. See warranty card for warranty. For service and parts, contact your local dealer or InSinkEerator® directly at 1-800-558-5700.


Contaminant Reduction	Average Influent	Influent Challenge Concentration, Except As Noted, Units Apply to Each Row.	Avg. Product Water	Average % Reduction	NSF Red. Requirements	NSF Test
Chlorine Taste & Odor	2.1 mg/L	2.0 mg/L ± 10%	0.06 mg/L	97.0%	≥ 50%	J-00082587
Nominal Particulate Class III, ≥5 µm to <15 µm	270,000 pts/mL	At least 10,000 particles/mL	82 pts/mL	99.9%	≥85%	J-00119308

**Application guidelines/Water Supply Parameters for NSF Testing:** Service flow of .75 gpm, community or private well water supply, water pressure of 30-120 psi (207-827 kPa), water temperature of 33°F-100°F Except as noted, all testing performed at pH = 7.5 ± 0.5, Flow: .75 gpm, Pressure: 60 psi, Temp: 20°±3°C.

Refer to the Performance Data Sheet for InSinkEerator Filter System Model F-2000S Replacement Cartridge: F-2000

Contact an authorized InSinkEerator service agent for repairs or replacement components. Replacement filters F-1000 and F-2000 can be ordered by calling 800-558-5700, visiting [shop.insinkerator.com](http://shop.insinkerator.com), or by contacting an authorized InSinkEerator reseller.

### Job Specifications



USA  
 1-800-558-5700  
[www.insinkerator.com](http://www.insinkerator.com)

Canada  
 1-800-558-5700  
[www.insinkerator.ca](http://www.insinkerator.ca)



The Emerson logo is a trademark and a service mark of Emerson Electric Co. InSinkEerator may make improvements and/or changes in the specifications at any time, in its sole discretion, without notice or obligation and further reserves the right to change or discontinue models.

©2014 InSinkEerator, a business unit of Emerson Electric Co. All Rights Reserved.