

D5524XLFI

Type: Fully integrated
Colors: Fully Integrated (FI) model accommodates a selection of accessory door panels or customer supplied custom wood panel

PERFORMANCE

Capacity: 14 place settings
Noise level 50 dB(A)
7Spray™ system
PowerZone™ Pots & Pans, PowerZone™ Cutlery

PROGRAMS

Heavy	Normal	Daily
Quick	Super Quick	Delicate
Eco	Rinse & Dry	Rinse & Hold

Super Quick program in 15 minutes!

FEATURES

7 Temperatures, Condensation dry, Hidden control, LCD display, Uses as little as 2.6 gals of water in Quick wash, Energy Star rated, 2 year warranty, ADA compliant, Fits into opening as low as 32 1/4" height

FLEXIRACKS™ (SEE PAGE 20)

Standard upper rack accommodates:

- 9" items
- Height-adjustable stemware shelf
- High-side design to protect dishes and glasses

Premium lower rack accommodates:

- 12" dishes
- Cutlery basket



XL TALL TANK MODELS

PLANNING & DESIGN: XL DISHWASHERS


D5424XL, D5524XLFI, D5534XLFI, D5624XLCS, D5634XLHS, D5644XLCS

Unit Dimensions

	US	METRIC
HEIGHT*:	32 1/4" – 34 3/8"	819 – 873 mm
WIDTH: 5424XL, 5624XLCS 5634XLHS & 5644XLCS	24"	610 mm
5524XLFI, 5534XLFI	23 5/8"	600 mm
DEPTH:	22 7/8"	581 mm
DEPTH W/HANDLE:	24 7/8"	632 mm
DEPTH W/DOOR OPEN:	47 1/2"	1207 mm
WEIGHT: 5424XL, 5624XLCS, 5634XLHS & 5644XLCS	106 lbs	48 kg
5524XLFI, 5534XLFI	94 lbs	43 kg

Technical Data

Electricity	120 V, 60 Hz, 15 Amp
Water pressure	4.2 – 140 psi
Heating element	1200 watt
Max loading	1300 watt

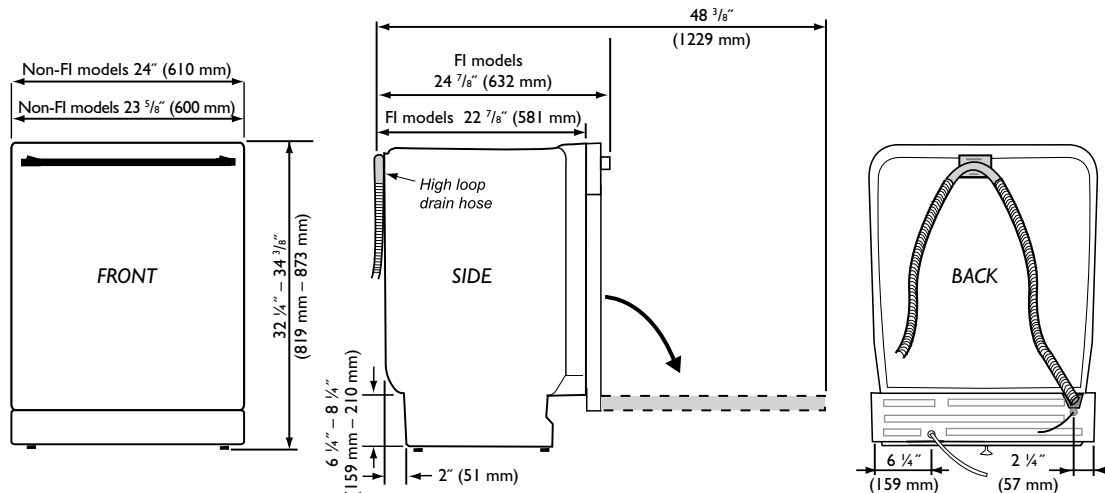


Cutout Dimensions

	US	METRIC
HEIGHT:	32 1/4" – 34 1/2"	819 – 873 mm
WIDTH: 5424XL, 5624XLCS, 5634XLHS & 5644XLCS	24"	610 mm
5524XLFI, 5534XLFI	23 5/8" – 24"	600 – 610 mm
DEPTH:	24"	510 mm

Depth includes space for the high-loop drain hose

The electrical and water supplies should enter through the area indicated by the shaded area. Preferably, they should come through the right side of the machine. The access hole must be round and smooth and no bigger than 2" (51 mm) in diameter.

* 32 1/4" / 819 mm height requires removal of top trim & lower side trim (2)

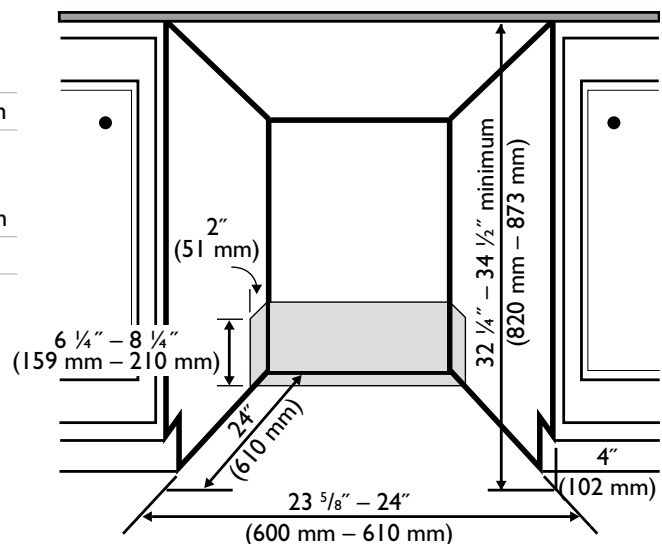

Specifications are subject to change without notice. See installation instructions for additional details.