# FRIGIDAIRE



# Freezers FFU14F7H W/B



# Signature Features

# Ready-Select® Controls with Upfront Display

Easily select options with the touch of a button.

#### **Built with American Pride**

Appliances that are high-performing, more accessible, and more innovative than ever—designed, built, and engineered in the U.S.A.

#### **Frost Free Operation**

Never defrost your freezer again.

#### **Quick Freeze**

Quickly freeze whatever you store to keep foods at their freshest.

### Frost Free 14 Cu. Ft. Upright

#### **Product Dimensions**

 Height (Including Hinges)
 60-3/8"

 Width
 28"

 Depth (Including Door)
 28-5/8"

#### More Easy-To-Use Features

#### **Automatic Alerts**

Freezer alerts you if the door is left open or if the temperature rises.

#### **Bright Lighting**

Our bright lighting makes it easy to see what's inside.

#### Store-More™ Tilt-Out Wire Door Bins

Store more in the door - and get easy access with the tilt-out feature.

#### SpaceWise® Adjustable Shelf

Easily adjust the shelf up and down to create more space for taller items.

#### Lock with Pop-Out Key

The freezer key automatically ejects after locking the door so you won't leave it in the door.

#### Power-On Indicator Light

Know at a glance that your freezer is working.

#### SpaceWise® Shelf Bookends

Clever and flexible bookends are designed to hold more frozen food containers upright.

## Adjustable Temperature Control

Select the correct temperature for your

#### Color-Coordinated Handle


Available in:





Features	
Door Handle Design	Reach-Through
Reversible Door	
Automatic Door Closer	Yes
Leveling Legs	Yes
Lock with Pop-Out Key	Yes
Defrost	Frost Free
Adjustable Temperature Control	Ready-Select*
Front Digital Display	Yes
Temp Display Mode	F/C
High-Temp Duration Readout	Yes
High-Temp Alarm	Yes
Door Ajar Alarm	Yes
Airflow Ports	1
Interior Lighting	Bright
Full-Width Adjustable Shelves	1 Glass
Full-Width Fixed Shelves	1 Glass/1 Wire
Removable Trivet	
SpaceWise® Shelf Bookend	2
Mid-Level Baskets	1
Lower Storage Basket	1
Basket Dividers	
Retractable Pizza Shelf	
Soft Freeze™ Zone	
Store-More™ Adjustable Door Bins	
Full-Width Door Bins	
Store-More™ Tilt-Out Wire Door Bins	1
Fixed Door Racks	4
Defrost Drain	
Power-On Light	Yes
Convertible	
Certifications	
CSA Rating	Household
Specifications	
Total Capacity (Cu. Ft.)	13.7
Shelf Area (Sq. Ft.)	15.89
Annual Energy (kWH)	621
Annual Energy Cost (.1065/kWH)	\$66
Power Supply Connection Location	Lower Right Rear
Voltage Rating	115V
Connected Load (kW rating) @ 115 Volts <sup>1</sup>	.58
Amps @ 115 Volts	5
Minimum Circuit Required (Amps)	15
Shipping Weight (Approx.)	177 Lbs.
companie Weight (Approx.)	177 203.

<sup>1</sup>An electrical supply with grounded three-prong receptacle is required. The power supply circuit must be installed in accordance with current edition of National Electrical Code (NFPA 70) and local codes & ordinances.

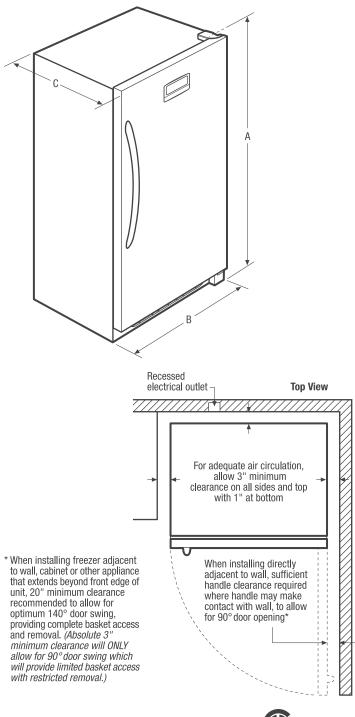


NOTE: For planning purposes only. Always consult local and national electric codes. Refer to Product Installation Guide for detailed installation instructions on the web at frigidaire.com.



Product Dimensions	
A-Height (Including Hinges)	60-3/8"
B-Width	28"
C-Depth (Including Door)	28-5/8"
Depth with Door Open 90°	55-3/8"

Accessories information available on the web at **frigidaire.com** 



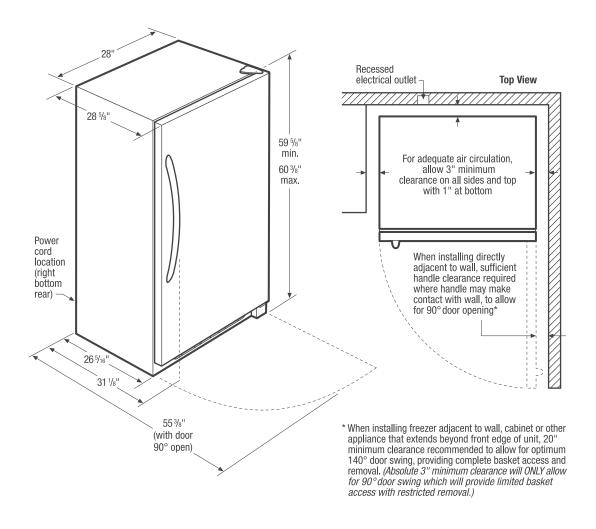

#### **Upright Freezer Specifications**

- Product Shipping Weight (approx.) 177 Lbs.
- An electrical supply with grounded three-prong receptacle is required. The power supply circuit must be installed in accordance with current edition of *National Electrical Code (NFPA 70)* and local codes & ordinances.
- Voltage Rating -115V
- · Connected Load (kW Rating)@115 Volts = 0.58 kW
- · Amps@115 Volts = 5 Amps
- · Always consult local and national electric codes.
- For adequate air circulation, allow 3" minimum clearance on all sides and top with 1" at bottom.
- When installing freezer adjacent to wall, cabinet or other appliance that extends beyond front edge of unit, 20" minimum clearance recommended to allow for optimum 140° door swing, providing complete basket access and removal. (Absolute 3" minimum clearance will ONLY allow for 90° door swing which will provide limited basket access with restricted removal.)
- Locate where surrounding air temperature will not exceed 110°F, to ensure optimum performance. (Temperatures 32°F and below will NOT affect operation.)
- All bottom corners of unit MUST rest firmly on solid level surface of hard material, same height as flooring. Surface must be strong and stable enough to support unit when fully loaded.
- Equipped with adjustable leveling legs to ensure unit is level, which is required in order to function properly.

Note: For planning purposes only. Refer to Product Installation Guide on the web at frigidaire.com for detailed instructions.

