

DAP 1927

36-inch wall-mounted ventilation hood

with EasySwitch light-touch switches for convenient operation and LED lighting



- Timeless design – stainless steel canopy 35 3/8 (898) in (mm) wide
- Powerful – ?? in Booster level
- Efficient filtration- 10-ply stainless steel grease filters
- Safe and easy to clean – Miele CleanCover
- Suitable for every home – vented or recirculating

EAN: 4002516878889 / Material number: 12784050 /

Old Material Number: 28P1927SUSA

Construction type and design	
Appliance colour	Stainless steel
Design	
Wall ventilation hood	•
Operating modes	
Recirculated mode	Can be retrofitted
Recirculation conversion kit (order separately)	DUW 20
User convenience	
Electronic controls	•
EasySwitch	•
Operation	EasySwitch
Power levels (number excl. Intensive)	3
Booster levels	1
Cleaning convenience	
Easy-to-clean canopy interior – CleanCover	•
Filter system	
Number of dishwasher-safe stainless steel grease filters (10-ply)	3
Lighting	
Number x W	3 x 3 W
Light intensity in lx	450 lx
Color temperature in K	3000 Kelvin
Blower	
Dual-action blower	•
AC motor	•
Exhaust air	
Maximum air throughput in cfm according to HVI	418
A	

DAP 1927

36-inch wall-mounted ventilation hood

with EasySwitch light-touch switches for convenient operation and LED lighting



EAN: 4002516878889 / Material number: 12784050 /


Old Material Number: 28P1927SUSA

Total connected load in kW	0.35
Voltage in V	120
Fuse rating in A	15
Frequency in Hz	60
Installation note	
Vent connection at top	•
Vent connection at top and rear	•
Diameter of vent connection in in.(mm)	6 (150)
Telescopic chimney	•
Standard accessories	
Non-return flap	•

DAP 1927

36-inch wall-mounted ventilation hood

with EasySwitch light-touch switches for convenient operation and LED lighting

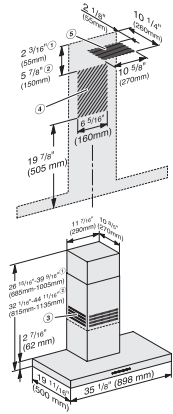

PUR98W, DAP1927 (Installation drawing) – USA/CDN

1) Extraction, 2) Recirculation, 3) Ventilation grille at top for recirculation, 4+5) Installation cut-out (5 not required for recirculation)