



	INTERNAL BLOWER STANDARD	INTERNAL BLOWER with ACT™ AIRFLOW CONTROL TECHNOLOGY™*	
SINGLE BLOWER (INCLUDED) Min. - Max. CFM	200 - 650	200 - 390	200 - 290
SINGLE BLOWER (INCLUDED) Min. - Max. Sones	1 - 8	*AIRFLOW CONTROL TECHNOLOGY™ (ACT™) is an exclusive feature built into specific Zephyr hoods which can limit the maximum blower CFM to meet local code requirements.	
DUAL BLOWER (OPTIONAL) Min. - Max. CFM	400 - 1,200		
DUAL BLOWER (OPTIONAL) Min. - Max. Sones	3 - 11		




Optional Wireless Remote Control

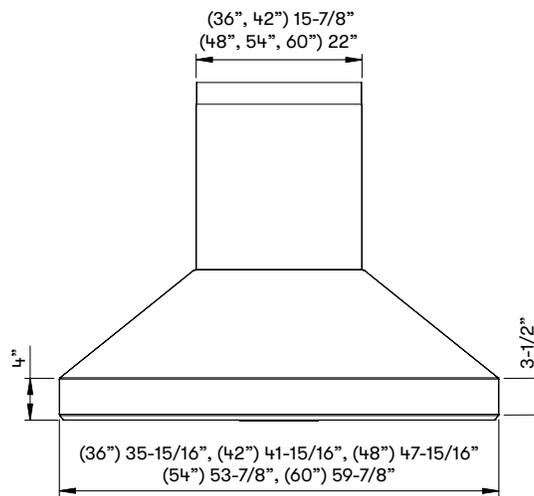

FRONT

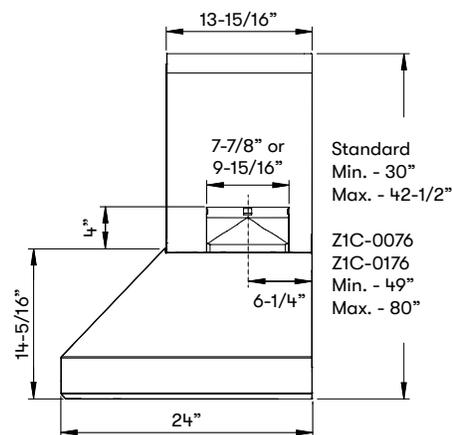

SIDE

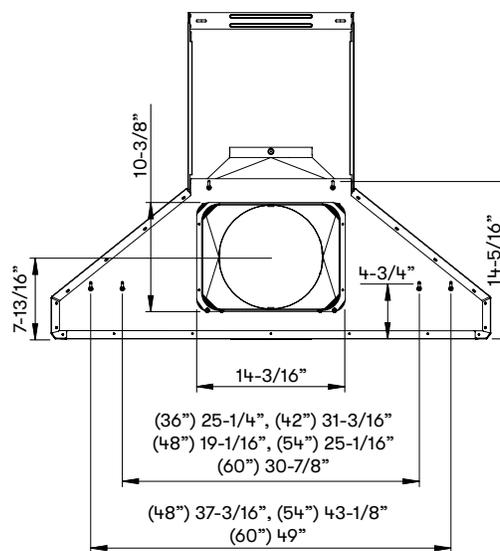

TOP

MODEL

Stainless Steel
SizeAK7636CS/AK7642CS
36"/42"AK7648CS/AK7654CS/AK7660CS
48"/54"/60"

BLOWER PERFORMANCE

Included Single Blower
ACT 390 CFM (Min. - Max.)*
ACT 290 CFM (Min. - Max.)*
Optional Dual Blower200-650 CFM, 1-8 Sones
200-390 CFM
200-290 CFM
400-1,200 CFM, 3-11 Sones200-650 CFM, 1-8 Sones
200-390 CFM
200-290 CFM
400-1,200 CFM, 3-11 Sones

FEATURES

ACT™ Technology
Controls
Speed Levels
Auto Delay-Off
CleanAir Function
Lighting
Dual-Level Lighting
Directional Lighting
TruHue™
Filters
Grease Collection Tray
Wireless Remote Control
Recirculating Option
Duct Cover Extension Option
ADA Compliant390, 290, Single Blower Only
Electronic LCD
5**
Yes
Yes
LumiLight LED, 6W x2
Yes
Yes
Yes
Pro Baffle x2
Yes
Yes, Optional
No
Yes
Yes (w/ remote accessory)390, 290, Single Blower Only
Electronic LCD
5**
Yes
Yes
LumiLight LED, 6W x4
Yes
Yes
Yes
Pro Baffle x3
Yes
Yes, Optional
No
Yes
Yes (w/ remote accessory)

DUCT SPECIFICATIONS

Vertical Single Internal Blower
Horizontal Single Internal Blower
Vertical Dual Internal Blower
Horizontal Dual Internal Blower8" Round
8" Round
10" Round
10" Round8" Round
8" Round
10" Round
10" Round

AC POWER (Single Blower)

120V, 60Hz at Max. 5A

120V, 60Hz at Max. 5A

AC POWER (Dual Blower)

120V, 60Hz at Max. 9A

120V, 60Hz at Max. 9A

OPTIONAL ACCESSORIES

Wireless Remote Control
Dual Internal Blower
Duct Cover Extension
Stainless Steel Telescopic Backsplash
Make-Up Air Kit (Single Blower)
Make-Up Air Kit (Dual Blower)RC-0002
PBD-1200B
Z1C-0076
AK1716/AK1712
MUA008A
MUA010ARC-0002
PBD-1200B
Z1C-0176
AK1718/AK1714
MUA008A
MUA010A

MOUNTING HEIGHT RANGE***

24" - 36"

24" - 36"

WARRANTY

3 years parts, 1 year labor

3 years parts, 1 year labor

CEILING HEIGHT

8' 8.5' 9' 9.5' 10' 10.5' 11' 12'

STANDARD
DUCT COVER

Ducted Mounting Height***

24" - 30.5" 24" - 36" 29.5" - 36" 35.5" - 36" NA NA NA NA

DUCT COVER
EXTENSION

Ducted Mounting Height***

NA NA NA 24" - 29.5" 24" - 35.5" 24" - 36" 24" - 36" 27.5" - 36"

*ACT™ only available with single internal blower.

**When ACT is enabled the maximum speed levels will change. ACT 390 CFM = 3 speeds and ACT 290 CFM = 2 speeds.

***Mounting height refers to distance between top of a 36" tall cooking surface and bottom of hood.



TruHue™

A bright idea: customize your hood's light to harmonize with the rest of your kitchen's lighting at the touch of a button—from 2700K, 3000K, 3500K, 4000K to 5000K.

ACT™

Airflow Control Technology™ (ACT™)

is an exclusive feature built into specific Zephyr hoods which can limit the maximum blower CFM to meet local code requirements.

Specifications subject to change, check zephyronline.com for up-to-date information.
Zephyr Ventilation | 2277 Harbor Bay Parkway, Alameda, CA 94502 | 888.880.VENT

FEB26.0201

