



	INTERNAL BLOWER STANDARD	INTERNAL BLOWER with ACT™ AIRFLOW CONTROL TECHNOLOGY™*	
SINGLE BLOWER (INCLUDED) Min. - Max. CFM	200 - 650	200 - 390	200 - 290
SINGLE BLOWER (INCLUDED) Min. - Max. Sones	1 - 8	*AIRFLOW CONTROL TECHNOLOGY™ (ACT™) is an exclusive feature built into specific Zephyr hoods which can limit the maximum blower CFM to meet local code requirements.	
DUAL BLOWER (OPTIONAL) Min. - Max. CFM	400 - 1,200		
DUAL BLOWER (OPTIONAL) Min. - Max. Sones	3 - 11		




Optional Wireless Remote Control

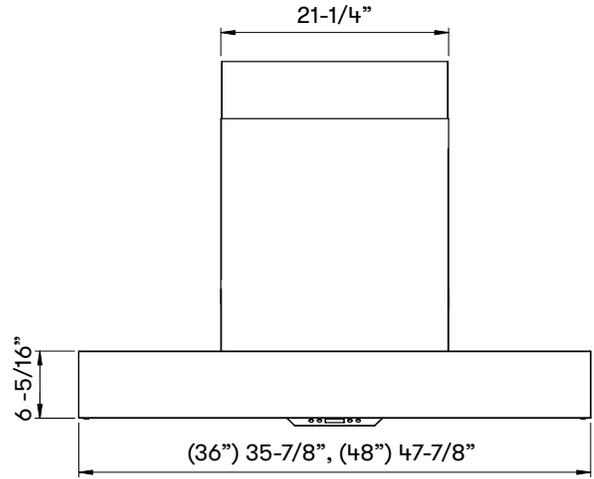

FRONT

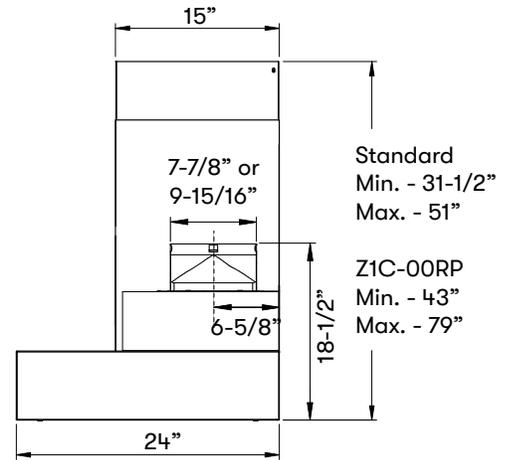

SIDE

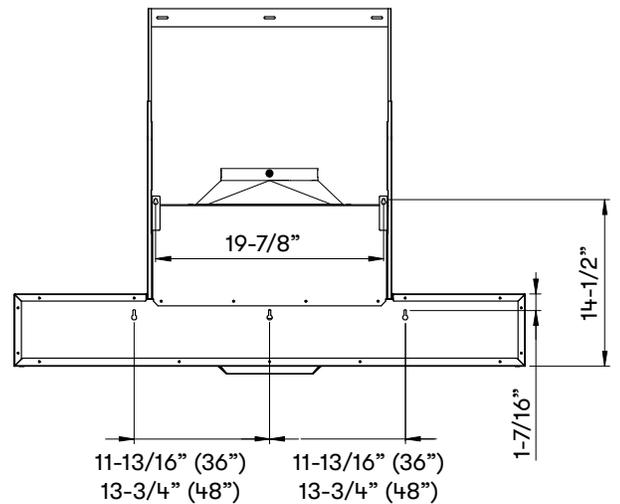

BACK

MODEL

Stainless Steel	ZRP-E36CS	ZRP-E48CS
Size	36"	48"

BLOWER PERFORMANCE

Included Single Blower	200-650 CFM, 1-8 Sones	200-650 CFM, 1-8 Sones
ACT 390 CFM (Min. - Max.)*	200-390 CFM	200-390 CFM
ACT 290 CFM (Min. - Max.)*	200-290 CFM	200-290 CFM
Optional Dual Blower	400-1,200 CFM, 3-11 Sones	400-1,200 CFM, 3-11 Sones

FEATURES

ACT™ Technology	390, 290, Single Blower Only	390, 290, Single Blower Only
Controls	Electronic LCD	Electronic LCD
Speed Levels	5**	5**
Auto Delay-Off	Yes	Yes
CleanAir Function	Yes	Yes
Lighting	LumiLight LED, 6W x2	LumiLight LED, 6W x4
Dual-Level Lighting	Yes	Yes
Directional Lighting	Yes	Yes
TruHue™	Yes	Yes
Filters	Pro Baffle x2	Pro Baffle x3
Grease Collection Tray	Yes	Yes
Wireless Remote Control	Yes, Optional	Yes, Optional
Recirculating Option	No	No
Duct Cover Extension Option	Yes	Yes
ADA Compliant	Yes (w/ remote accessory)	Yes (w/ remote accessory)

DUCT SPECIFICATIONS

Vertical Single Internal Blower	8" Round	8" Round
Horizontal Single Internal Blower	NA	NA
Vertical Dual Internal Blower	10" Round	10" Round
Horizontal Dual Internal Blower	NA	NA

AC POWER (Single Blower)	120V, 60Hz at Max. 5A	120V, 60Hz at Max. 5A
AC POWER (Dual Blower)	120V, 60Hz at Max. 9A	120V, 60Hz at Max. 9A

OPTIONAL ACCESSORIES

Wireless Remote Control	RC-0002	RC-0002
Dual Internal Blower	PBD-1200B	PBD-1200B
Duct Cover Extension	Z1C-00RP	Z1C-00RP
Stainless Steel Telescopic Backsplash	AK1716	AK1718
Make-Up Air Kit (Single Blower)	MUA008A	MUA008A
Make-Up Air Kit (Dual Blower)	MUA010A	MUA010A

MOUNTING HEIGHT RANGE***	24" - 36"	24" - 36"
--------------------------	-----------	-----------

WARRANTY	3 years parts, 1 year labor	3 years parts, 1 year labor
----------	-----------------------------	-----------------------------

CEILING HEIGHT		8'	8.5'	9'	9.5'	10'	10.5'	11'	12'
STANDARD DUCT COVER	Ducted Mounting Height***	24" - 28.5"	24" - 34.5"	24" - 36"	27" - 36"	33" - 36"	NA	NA	NA
DUCT COVER EXTENSION	Ducted Mounting Height***	NA	NA	24" - 29"	24" - 35"	24" - 36"	24" - 36"	24" - 36"	29" - 36"

*ACT™ only available with single internal blower.

**When ACT is enabled the maximum speed levels will change. ACT 390 CFM = 3 speeds and ACT 290 CFM = 2 speeds.

***Mounting height refers to distance between top of a 36" tall cooking surface and bottom of hood.



TruHue™

A bright idea: customize your hood's light to harmonize with the rest of your kitchen's lighting at the touch of a button—from 2700K, 3000K, 3500K, 4000K to 5000K.



Airflow Control Technology™ (ACT™)

is an exclusive feature built into specific Zephyr hoods which can limit the maximum blower CFM to meet local code requirements.

Specifications subject to change, check zephyronline.com for up-to-date information.
Zephyr Ventilation | 2277 Harbor Bay Parkway, Alameda, CA 94502 | 888.880.VENT

FEB26.0201

