

ACCESSORY HANDLES AND DIALS

PLANNING GUIDE

MINIMAL | Handles

CONTEMPORARY | Handles

PROFESSIONAL | Handles and Dials

INTRODUCTION		SUPPORT		NOTES	
This comprehensive planning guide provides you with the framework and tools to achieve your desired design outcome with Fisher & Paykel appliances. In this guide, you will find a range of conceptual, detailed, and dimensional product information to bring your ideas to life and create spaces that truly reflect your vision.		For additional design planning and installation support please contact the Fisher & Paykel design support team. designsupport@fisherpaykel.com		The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Refer to to our website fisherpaykel.com for the latest document version. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Specific installation guidance will be available with the product on delivery and on our website.	
CONCEPT DESIGN	PAGE	DEVELOPED AND DETAILED DESIGN	PAGE	DEVELOPED AND DETAILED DESIGN	PAGE
DESIGN CHOICE		COOKING		COOLING	
Accessory Compatibility	4	Model Codes - Ovens, Companions, Cooktops and Rangetops	7	Model Codes - Single Door and Double Door	14
Accessory Availability	5	Model Codes - Ranges	8	Model Codes - Triple Door, Undercounter and Cooldrawer™	15
		Data Sheet - Handles and Dials	9	Data Sheet - Single Door Handles	16
				Data Sheet - Double Door Handle Kits 84"	17
		DISHWASHING		Data Sheet - Double Door Handle Kits 84"	18
		Model Codes - Dishwashing	11	Data Sheet - Double Door Handle Kits 84"	19
		Data Sheet	12	Data Sheet - Double Door Handle Kits 79 15/16"	20
				Data Sheet - Double Door Handle Kits 69 3/4"	21
				Data Sheet - Triple Door Handle Kits 84"	22
				Data Sheet - Triple Door Handle Kits 70 13/16"	23
				Data Sheet - Triple Door Handle Kits 70 13/16"	24
				Data Sheet - Undercounter	25
				Data Sheet - Cooldrawer™	26

DESIGN CHOICE

ACCESSORY COMPATIBILITY

This overview outlines compatible product combinations based on available handle and dial accessories. Products without handles or dials can also be added to the combinations. See individual product pages on fisherpaykel.com for full product details.

- ✓ = Handle/dial accessories available to match with Cooking, Dishwashing and Cooling products.
- = Supplied with the product as standard.


		COOKING					DISHWASHING		COOLING	
		30" Ovens & Companions	24" Ovens & Companions	Cooktops	Rangetops	Ranges	Integrated	Built In	Integrated	Freestanding
MINIMAL HANDLES	 Black	○	○	-	-	-	✓	-	✓	-
	 Grey	○	○	-	-	-	✓	-	-	-
CONTEMPORARY HANDLES	 Black	○	○	-	-	-	✓	-	-	-
	 Silver	○	○	-	-	-	✓	○	✓	○
PROFESSIONAL HANDLES	 Stainless Steel	○	-	-	-	○	✓	○	✓	○
	 Brass	✓	-	-	-	✓	✓	-	✓	-
	 Dark Cooper	✓	-	-	-	✓	✓	-	✓	-
PROFESSIONAL DIALS AND BEZELS	 Brass	-	-	✓	✓	✓	-	-	-	-
	 Dark Cooper	-	-	✓	✓	✓	-	-	-	-
	 Gun Metal*	-	-	○	○	○	-	-	-	-

*Dials are supplied in gun metal as standard; other finishes are available for separate purchase. Bezels are fixed to the product and are supplied in gunmetal.


The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com



● Black ● Grey

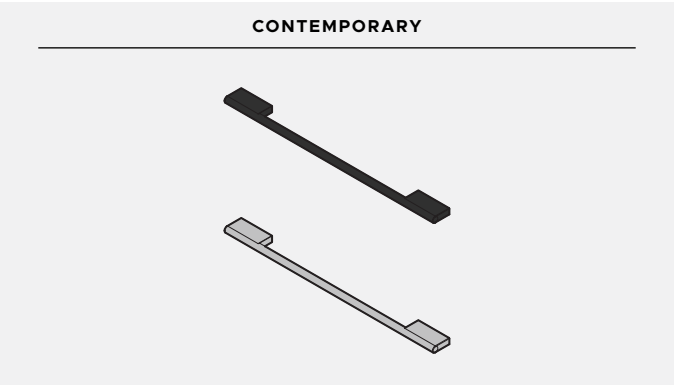

● Black ● Silver

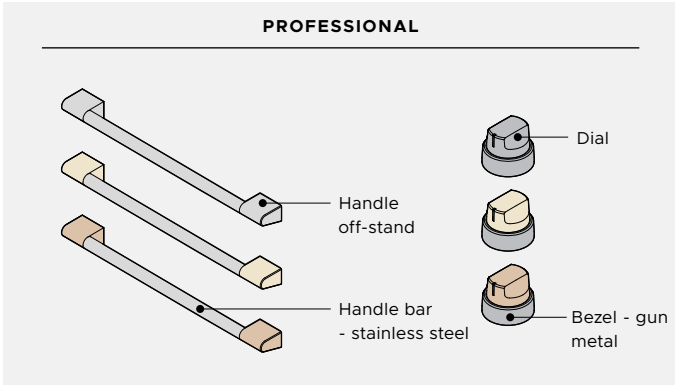

● Stainless Steel ● Brass ● Dark Copper ● Gun Metal


Handles are supplied in stainless steel and dials are supplied in gun metal as standard; other finishes are available for separate purchase. Bezels are fixed to the product and are supplied in gun metal.

Accessory = Purchase accessory online for integrated products, replacing supplied handles/dials or for cabinetry panels.
Supplied = Supplied with the product as standard.

	ACCESSORY AVAILABILITY					
	30" OVENS & COMPANIONS	COOKTOPS	RANGETOPS	RANGES	INTEGRATED DISHWASHING	INTEGRATED REFRIGERATION
MINIMAL						
Square handle	-	-	-	-	● ● Accessory	● Accessory
CONTEMPORARY						
Round handle	-	-	-	-	● ● Accessory	● Accessory
PROFESSIONAL						
Handle	● Supplied ● ● Accessory	-	-	● Supplied ● ● Accessory	● ● ● Accessory	● ● ● Accessory
Dial	-	● Supplied ● ● Accessory	● Supplied ● ● Accessory	● Supplied ● ● Accessory	-	-
Bezel	-	-	● Supplied	● Supplied	-	-


The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

COOKING

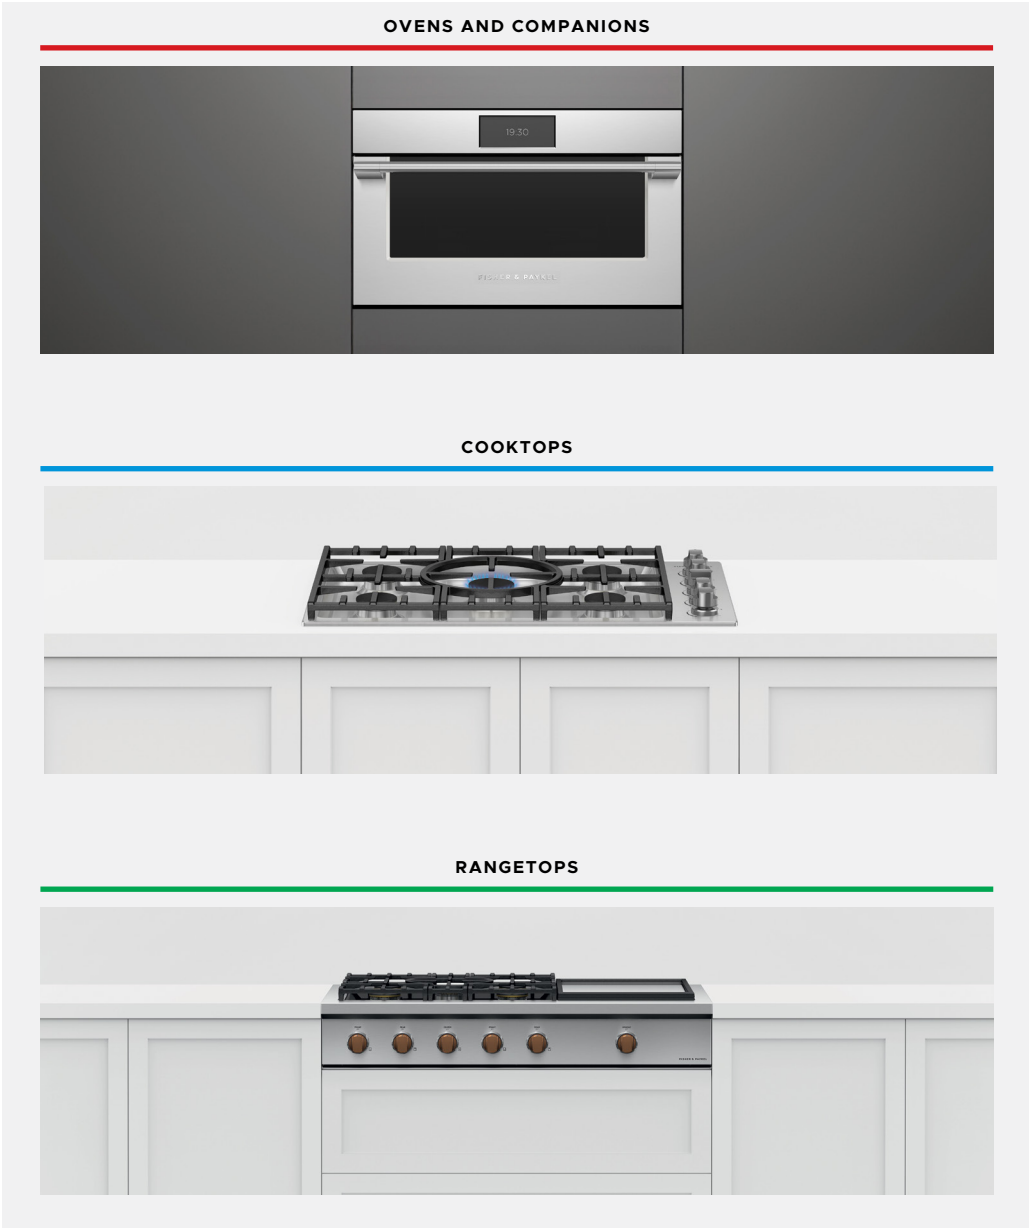

PROFESSIONAL HANDLES/DIALS

Supplied with product:
Handle bar and off-stand: ● Stainless steel
Dial and bezel: ● Gun metal
Alternative colour finishes/accessories do not include bezel replacement.

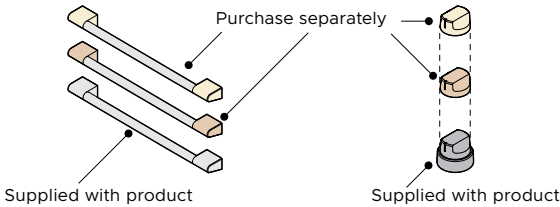

PRODUCT	HANDLE	DIAL
OVENS & COMPANIONS		
30" (760MM) WIDTH		
OB30SPPUX3, OB30SPPTX3, OB30SPPSUX3, OS30SPUX3, OS30NPUX3, OM30NPUX3, OM30NPTX3, WB30SPEX3, VB30SPEX3	AHP3OBWBVB30BA ●	-
	AHP3OBWBVB30DC ●	-

COOKTOPS

36" (910MM) WIDTH - 5 DIALS

CDV3-365H-N, CDV3-365H-L	-	ADLP3CD365BA ●
	-	ADLP3CD365DC ●

RANGETOPS

48" (1216MM) WIDTH - 8 DIALS

CPV3-488-N, CPV3-488-L	-	ADLP3CP488BA ●
	-	ADLP3CP488DC ●

48" (1216MM) WIDTH - 7 DIALS

CPV3-486GD-N, CPV3-486GD-L	-	ADLP3CP486BA ●
	-	ADLP3CP486DC ●

48" (1216MM) WIDTH - 6 DIALS

CPV3-485GD-N, CPV3-485GD-L	-	ADLP3CP485BA ●
	-	ADLP3CP485DC ●

36" (910MM) WIDTH - 6 DIALS

CPV3-366-N, CPV3-366-L	-	ADLP3CP366BA ●
	-	ADLP3CP366DC ●


PROFESSIONAL: ● = Brass ● = Dark Copper

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com



PROFESSIONAL HANDLES/DIALS

Supplied with product:
Handle bar and off-stand: ○ Stainless steel
Dial and bezel: ● Gun metal
Alternative colour finishes/accessories do not include bezel replacement.

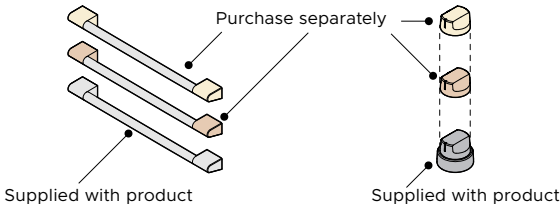

PRODUCT	HANDLE	DIAL
RANGES		
RANGES DUAL FUEL/INDUCTION		
- 10 DIALS		
RGV3-485GD-N, RHV3-484-N	AHP3R48BA ○	ADLP3RH484BA ●
	AHP3R48DC ●	ADLP3RH484DC ●
RANGES DUAL FUEL WITH GRIDDLE		
- 9 DIALS		
RDV3-486GD-N	AHP3R48BA ●	ADLP3RI486BA ●
	AHP3R48DC ●	ADLP3RI486DC ●
RANGES DUAL FUEL WITH GRIDDLE		
- 8 DIALS		
RDV3-485GD-N	AHP3R48BA ●	ADLP3RD485BA ●
	AHP3R48DC ●	ADLP3RD485DC ●
RANGES DUAL FUEL - 10 DIALS		
RDV3-488-L, RDV3-488-N	AHP3R48BA ●	ADLP3RD488BA ●
	AHP3R48DC ●	ADLP3RD488DC ●
RANGES DUAL FUEL - 6 DIALS		
RDV3-366-L, RDV3-366-N	AHP3R36BA ●	ADLP3RD366BA ●
	AHP3R36DC ●	ADLP3RD366DC ●
RANGES INDUCTION - 8 DIALS		
RIV3-486	AHP3R48BA ●	ADLP3RI486BA ●
	AHP3R48DC ●	ADLP3RI486DC ●
RANGES INDUCTION - 5 DIALS		
RIV3-365	AHP3R36BA ●	ADLP3RI365BA ●
	AHP3R36DC ●	ADLP3RI365DC ●

PROFESSIONAL: ○ = Brass ● = Dark Copper

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com



PROFESSIONAL HANDLES

Professional handles for Ovens, Companions, and Ranges are installed differently to other accessory handles.

The attachment points are already built into the product, refer to the product's Installation Guide for handle installation instructions.

SCREWS


Handles comes with Screws.

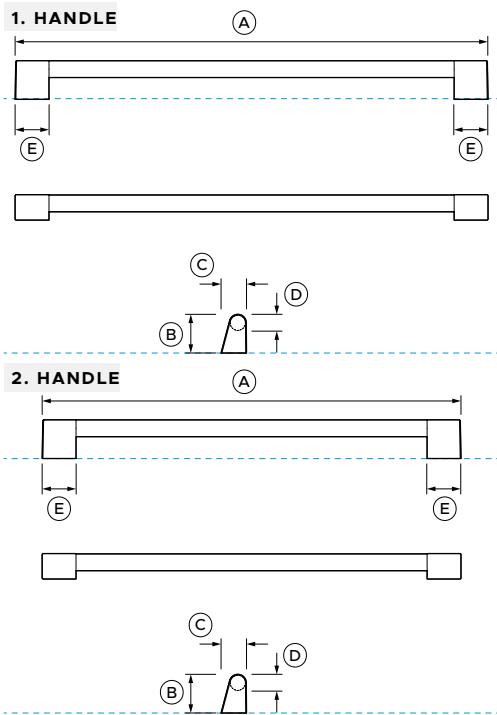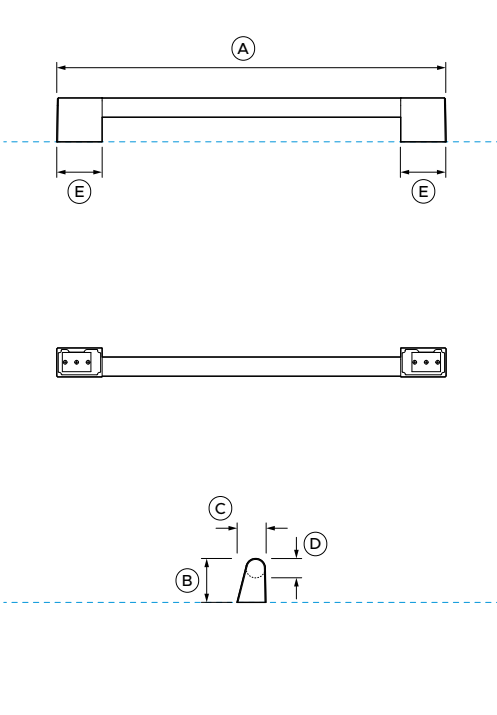

PROFESSIONAL DIALS

Professional dials are only for professional Cooktops, Rangetops, and Ranges.

Refer to the product Installation Guide for installation instructions.



PROFESSIONAL HANDLES - OVENS & COMPANIONS			
AHP3OBWBVB30BA, AHP3OBWBVB30DC			
		inch	mm
A	Overall length	20 9/32	515
B	Overall Height	2 9/32	58
C	Overall width	1 1/2	38.5
D	Thickness/diameter of handle rail	1	25.5
E	Off-stand width	2 3/8	60

PROFESSIONAL HANDLES - RANGES			
AHP3R48BA, AHP3R48DC, AHP3R36BA, AHP3R36DC			
		inch	mm
		1. HANDLE	2. HANDLE
		inch	mm
		35 3/16	893.5
		2 7/8	73
		1 7/8	48
		1 1/4	32
		2 17/32	64

PROFESSIONAL DIALS - COOKTOPS, RANGETOPS & RANGES

48" RANGE DIALS
ADLP3RH484BA, ADLP3RH484DC, ADLP3RI486BA, ADLP3RI486DC, ADLP3RD485BA, ADLP3RD485DC, ADLP3RD488BA, ADLP3RD488DC, ADLP3RI486BA, ADLP3RI486DC

36" RANGE DIALS
ADLP3RD366BA, ADLP3RD366DC, ADLP3RI365BA, ADLP3RI365DC

COOKTOP DIALS
ADLP3CD365BA, ADLP3CD365DC


RANGETOP DIALS
ADLP3CP488BA, ADLP3CP488DC, ADLP3CP486BA, ADLP3CP486DC, ADLP3CP485BA, ADLP3CP485DC, ADLP3CP366BA, ADLP3CP366DC

----- INDICATES PRODUCT DATUM

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

DISHWASHING

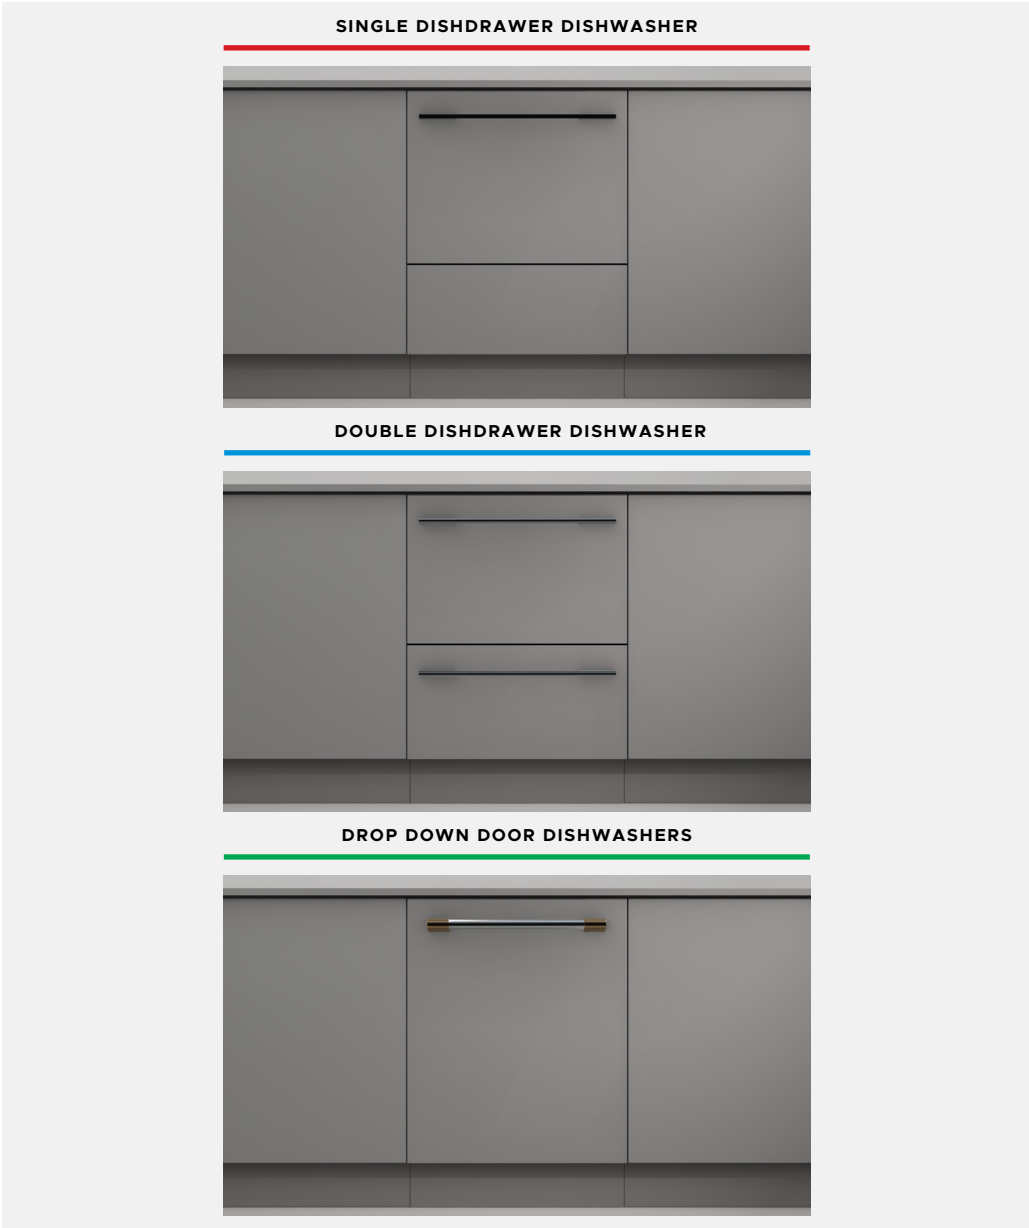

PRODUCT	MINIMAL	CONTEMPORARY	PROFESSIONAL
SINGLE DISHDRAWER DISHWASHER			
Integrated Single DishDrawer - Tall			
Series 11 - DD24STX6HI1, DD24STX6I1			AHP3-DWDD-SX
Series 9 - DD24SHTI9, DD24STI9	AHM1DDDW24B	AHD7DDDW24B	AHP3DDDW24BA
	AHM1DDDW24G	AHD7DDDW24S	AHP3DDDW24DC
Integrated Single DishDrawer - Standard			
Series 9 - DD24SI9			
DOUBLE DISHDRAWER DISHWASHER*			
Integrated Double DishDrawer - Tall			
Series 11 - DD24DTX6HI1, DD24DTX6I1			AHP3-DWDD-SX
Series 9 - DD24DHTI9, DD24DTI9	AHM1DDDW24B	AHD7DDDW24B	AHP3DDDW24BA
	AHM1DDDW24G	AHD7DDDW24S	AHP3DDDW24DC
Integrated Double DishDrawer - Standard			
Series 9 - DD24DI9			
*Double door requires 2x handles to be purchased.			
DROP DOOR DISHWASHERS			
Integrated Dishwasher - Tall			
Series 9 - DW24UT4I2			AHP3-DWDD-SX
Series 7 - DW24UT2I3	AHM1DDDW24B	AHD7DDDW24B	AHP3DDDW24BA
	AHM1DDDW24G	AHD7DDDW24S	AHP3DDDW24DC
Integrated Dishwasher - Standard			
Series 7 - DW24U2I3			
MINIMAL: ● = Black ● = Grey			
CONTEMPORARY: ● = Black ● = Silver			
PROFESSIONAL: ● = Stainless Steel ● = Brass ● = Dark Copper			


The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

DISHWASHING - ALL STYLES

Model codes comes with 1 handle.

SCREWS

Handles comes with M5 X 1" (25mm) Pan Head Socket Screw (2 or 4 per handle) suits standard 7 1/2" (19mm) panel. Thicker panels may require counterboring or longer screws.

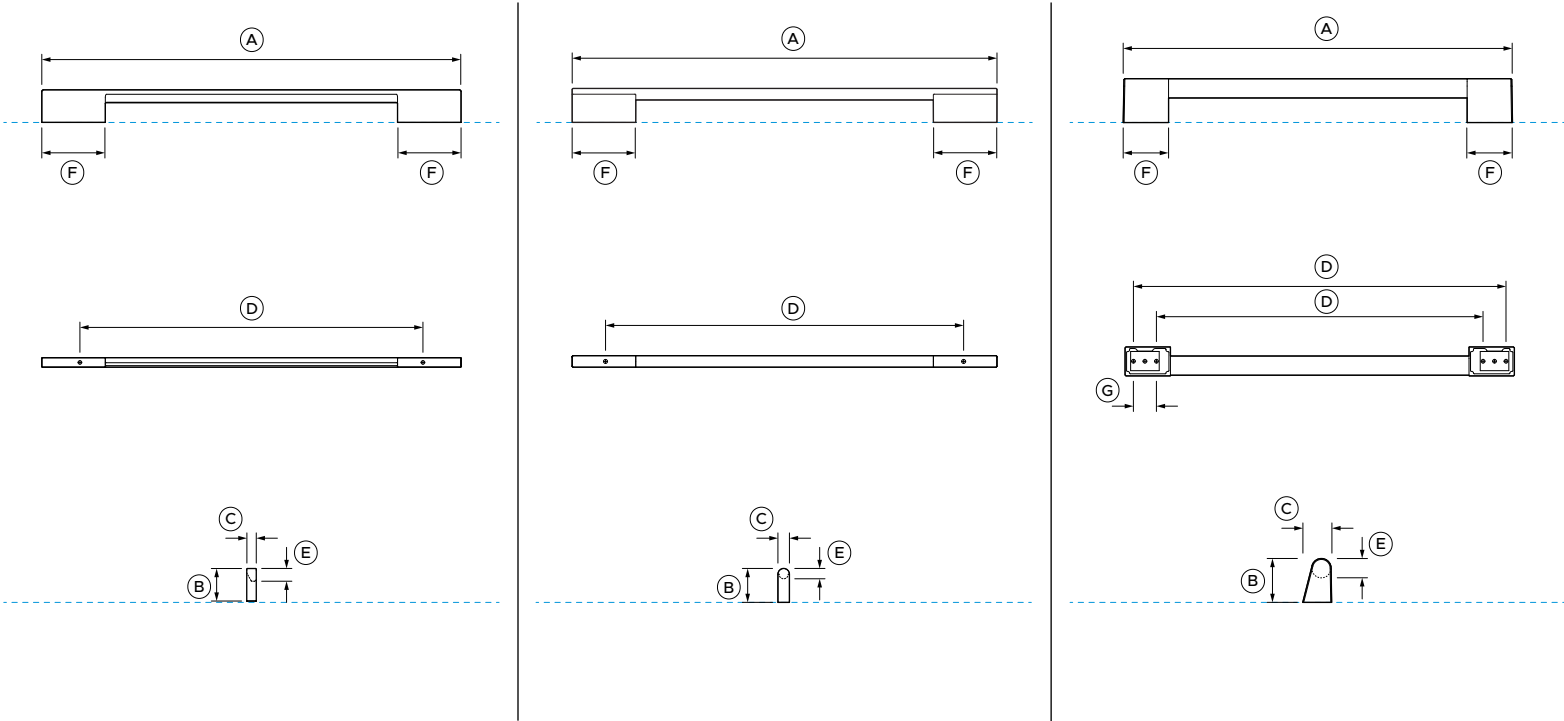


PRODUCT DIMENSIONS	MINIMAL HANDLE		CONTEMPORARY HANDLE		PROFESSIONAL HANDLE	
	AHM1DDDW24B, AHM1DDDW24G		AHD7DDDW24B, AHD7DDDW24S		AHP3-DWDD-SX, AHP3DDDW24BA, AHP3DDDW24DC	
	inch	mm	inch	mm	inch	mm
A Overall length	20 25/32	528	21 1/16	535	20 9/32	515
B Overall Height	1 5/8	41	1 11/16	43	2 9/32	58
C Overall width	15/32	12	9/16	14.5	1 1/2	38.5
D Distance between attachment holes	17	432	17	432	outer 19 13/32 inner 17	outer 493 inner 432
E Thickness/diameter of handle rail	5/8	16	9/16	14.5	1	25.5
F Off-stand width	3 5/32	80	3 5/32	80	2 3/8	60
G Distance between holes	-	-	-	-	1 3/16	30.5

----- INDICATES PRODUCT DATUM

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

COOLING

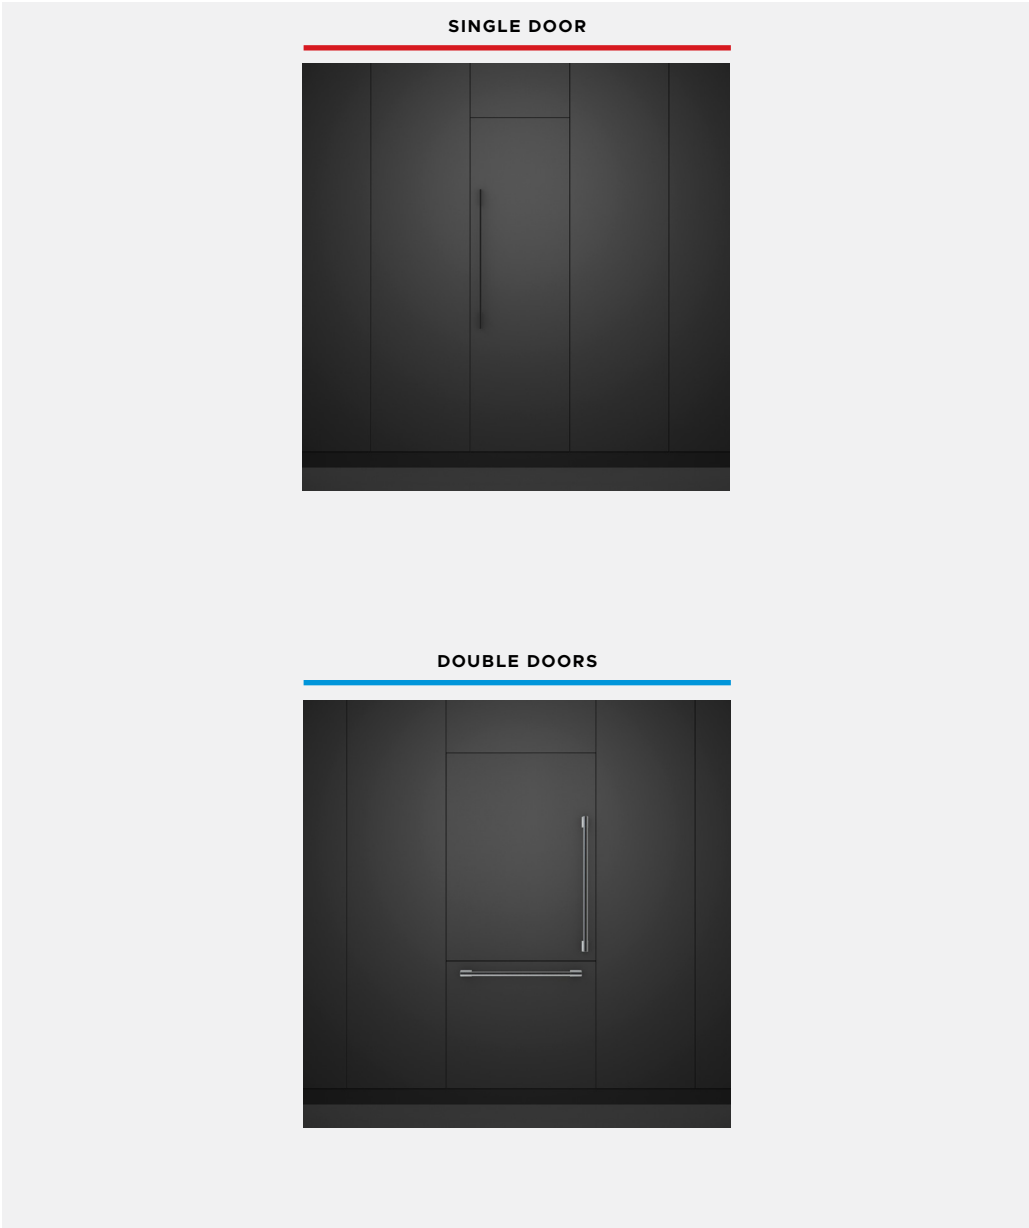

SINGLE DOOR

PRODUCT	MINIMAL	CONTEMPORARY	PROFESSIONAL
HEIGHT 84" (2134MM)			
RS2484SLHE1, RS2484SRHE1, RS2484SRHK1, RS2484SRK1, RS3084SLHE1, RS3084SRHE1, RS3084SRHK1, RS3084SRK1, RS1884FLJE1, RS1884FRJE1, RS1884FLJK1, RS2484FLJE1, RS2484FRJE1, RS2484FLJK1, RS3084FLJE1, RS3084FRJE1, RS3084FLJK1, RS2484VL2K1, RS2484VR2K1	AHM1RDSFB ●	AHD7RDSFX ●	AHP3RDSF ● AHP3RDSFBA ● AHP3RDSFDC ●
HEIGHT 74" (1870MM)			
RS2474S3RH1, RS2474F3LJ1			


DOUBLE DOOR*

PRODUCT	MINIMAL	CONTEMPORARY	PROFESSIONAL
HEIGHT 84" (2134MM)			
RS3684WRUVE1, RS3684WLUVE1	AHM1RD3684WB ●	AHD7RD3684WX ●	AHP3RD3684W ● AHP3RD3684WBA ● AHP3RD3684WDC ●
RS3084WLUE1, RS3084WRUE1, RS3084WLUK1, RS3084WRUK1	AHM1RD3084WB ●	AHD7RD3084WX ●	AHP3RD3084W ● AHP3RD3084WBA ● AHP3RD3084WDC ●
RS2484WLUE1, RS2484WRUE1, RS2484WLUK1, RS2484WRUK1	AHM1RD2484WB ●	AHD7RD2484WX ●	AHP3RD2484W ● AHP3RD2484WBA ● AHP3RD2484WDC ●
HEIGHT 79 15/16" (2030MM)			
RS36W80LJ1, RS36W80RJ1, RS36W80RU1	AHM1RD36WB ●	AHD7RD36WX ●	AHP3RD36W ●
HEIGHT 69 3/4" (1772MM)			
RS2474BRU1	AHM1RDB74LB** ● AHM1RDB74RB*** ●	AHD7RDB74X ●	AHP3RDB74 ●

*Handle kit comes with 2 handles. **For left hinge. ***For right hinge.

MINIMAL: ● = Black
CONTEMPORARY: ● = Silver
PROFESSIONAL: ● = Stainless Steel ● = Brass ● = Dark Copper

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

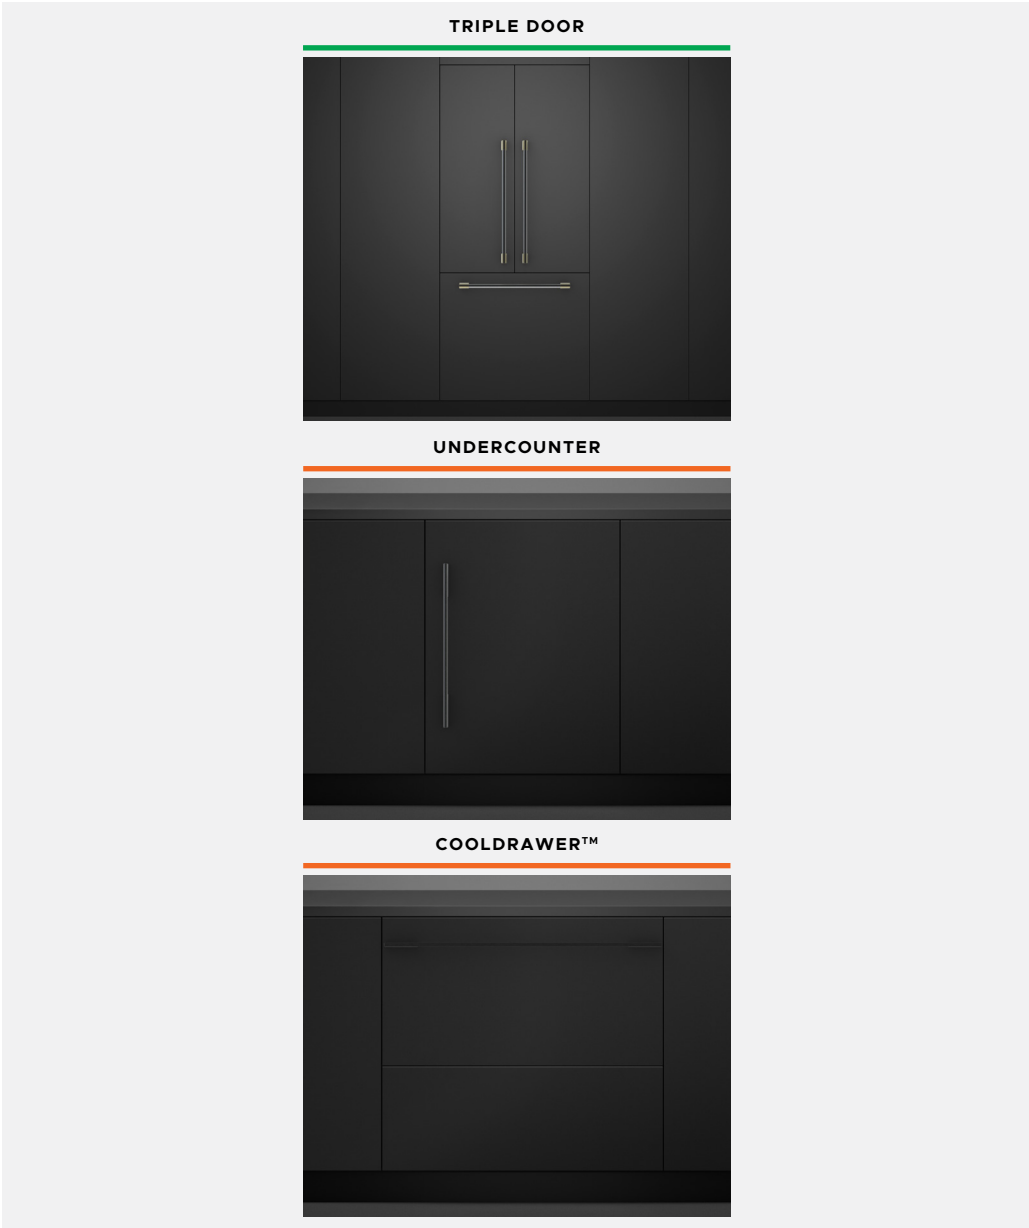

TRIPLE DOOR*

PRODUCT	MINIMAL	CONTEMPORARY	PROFESSIONAL
HEIGHT 84" (2134MM)			
RS3684AUVE1	AHM1RD3684AB ●	AHD7RD3684AX ●	AHP3RD3684A ● AHP3RD3684ABA ● AHP3RD3684ADC ●
HEIGHT 70 13/16" (1798MM)			
RS36A72J1, RS36A72U1, RS36A80J1, RS36A80U1	AHM1RD36AB ●	AHD7RD36AX ●	AHP3RD36A ●
RS32A72J1, RS32A72U1	AHM1RD32AB ●	AHD7RD32AX ●	AHP3RD32A ●

*Handle kit comes with 3 handles.

UNDERCOUNTER & COOLDRAWER™

PRODUCT	MINIMAL	CONTEMPORARY	PROFESSIONAL
UNDERCOUNTER			
RS2435V2RT1, RS2435V2R1, RS2435SBLT1, RS2435SBL1	AHM1RD35B ●	AHD7RD35X ●	AHP3RD35 ●
COOLDRAWER™			
RB36S25MKIW	AHM1RD36SB ●	AHD7RD36SX ●	AHP3RD36S ●

MINIMAL: ● = Black
CONTEMPORARY: ● = Silver
PROFESSIONAL: ● = Stainless Steel ● = Brass ● = Dark Copper




The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

COOLING - SINGLE DOOR HANDLES

Model code comes with 1 handle.

SCREWS

Handles comes with M5 X 1" (25mm) Pan Head Socket Screw (2 or 4 per handle) suits standard 7 1/2" (19mm) panel. Thicker panels may require counterboring or longer screws.

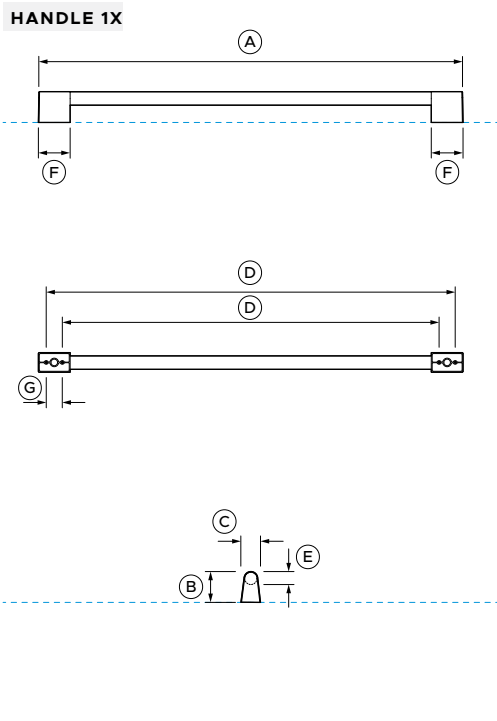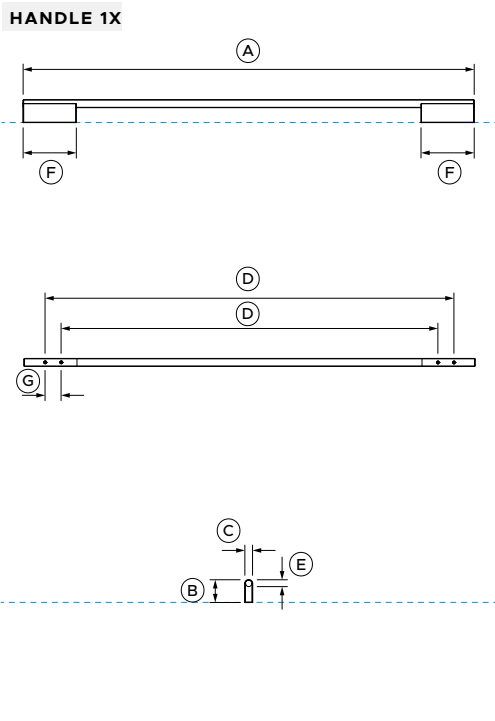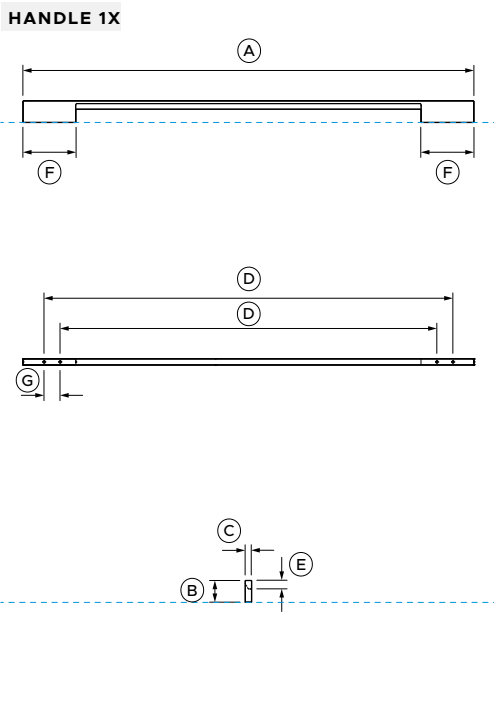

PRODUCT DIMENSIONS	
A	Overall length
B	Overall Height
C	Overall width
D	Distance between attachment holes - outer - inner
E	Thickness/diameter of handle rail
F	Off-stand width
G	Distance between holes

MINIMAL		
AHM1RDSFB		
	inch	mm
A	33 9/16	852
B	1 5/8	41
C	15/32	12
D	30 13/32	772.5
D	28 1/32	712
E	5/8	16
F	3 15/16	100
G	1 3/16	30

CONTEMPORARY		
AHD7RDSFX		
	inch	mm
A	33 9/16	852
B	1 11/16	43
C	9/16	14.5
D	30 13/32	772.5
D	28 1/32	712
E	9/16	14.5
F	3 15/16	100
G	1 3/16	30

PROFESSIONAL		
AHP3RDSF, AHP3RDSFBA, AHP3RDSFDC		
	inch	mm
A	31 9/16	802
B	2 9/32	58
C	1 7/16	37
D	30 13/32	772.5
D	28 1/32	712
E	1	25.5
F	2 3/8	60
G	1 3/16	30

----- INDICATES PRODUCT DATUM

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com




COOLING - DOUBLE DOOR HANDLE KIT

Handle kit comes with 2 handles.

Handle 1. = Bottom panel
Handle 2. = Top panel

SCREWS

Handles comes with M5 X 1" (25mm) Pan Head Socket Screw (2 or 4 per handle) suits standard 7 1/2" (19mm) panel. Thicker panels may require counterboring or longer screws.

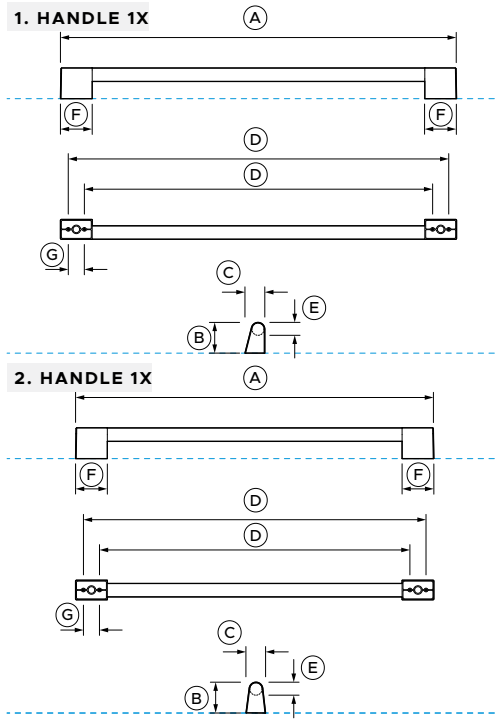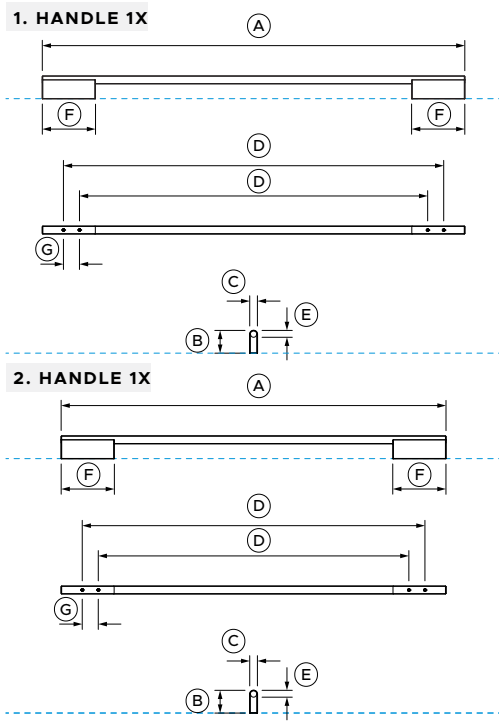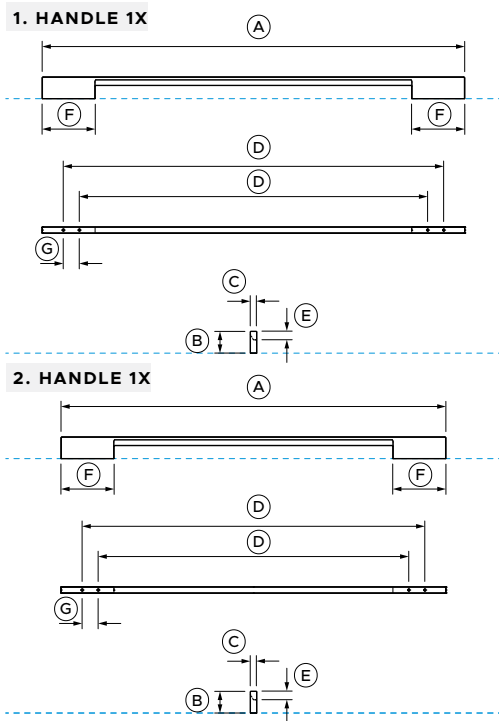

PRODUCT DIMENSIONS	
A	Overall length
B	Overall Height
C	Overall width
D	Distance between attachment holes - outer - inner
E	Thickness/diameter of handle rail
F	Off-stand width
G	Distance between holes

MINIMAL AHM1RD3684WB				
1. HANDLE		2. HANDLE		
inch	mm	inch	mm	
31 13/32	798	28 5/8	727	
1 5/8	41	1 5/8	41	
15/32	12	15/32	12	
28 9/32	718.5	25 1/2	647.5	
25 29/32	658	23 1/8	587	
5/8	16	5/8	16	
3 15/16	100	3 15/16	100	
1 3/16	30	1 3/16	30	

CONTEMPORARY AHD7RD3684WX				
1. HANDLE		2. HANDLE		
inch	mm	inch	mm	
31 13/32	798	28 5/8	727	
1 11/16	43	1 11/16	43	
9/16	14.5	9/16	14.5	
28 9/32	718.5	25 1/2	647.5	
25 29/32	658	23 1/8	587	
9/16	14.5	9/16	14.5	
3 15/16	100	3 15/16	100	
1 3/16	30	1 3/16	30	

PROFESSIONAL AHP3RD3684W, AHP3RD3684WBA, AHP3RD3684WDC				
1. HANDLE		2. HANDLE		
inch	mm	inch	mm	
29 13/32	747	26 21/32	677	
2 9/32	58	2 9/32	58	
1 15/32	37.5	1 7/16	37	
28 9/32	718.5	25 1/2	647.5	
25 29/32	658	23 1/8	587	
1	25.5	1	25.5	
2 3/8	60	2 3/8	60	
1 3/16	30	1 3/16	30	

----- INDICATES PRODUCT DATUM

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com




COOLING - DOUBLE DOOR HANDLE KIT

Handle kit comes with 2 handles.

Handle 1. = Top panel
Handle 2. = Bottom panel

SCREWS

Handles comes with M5 X 1" (25mm) Pan Head Socket Screw (2 or 4 per handle) suits standard 7 1/2" (19mm) panel. Thicker panels may require counterboring or longer screws.

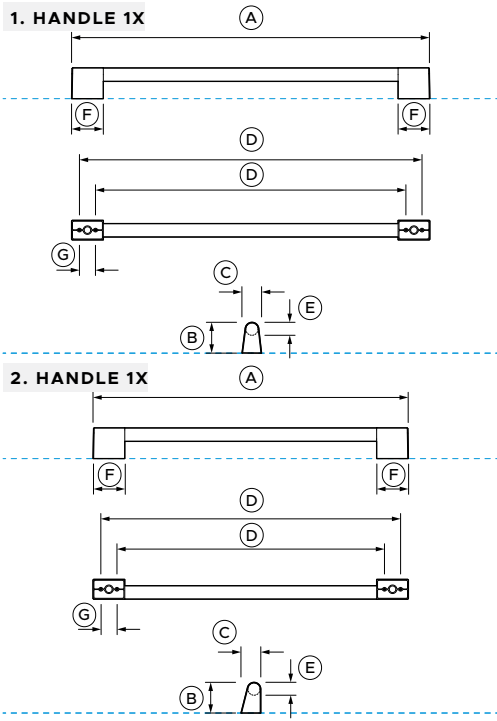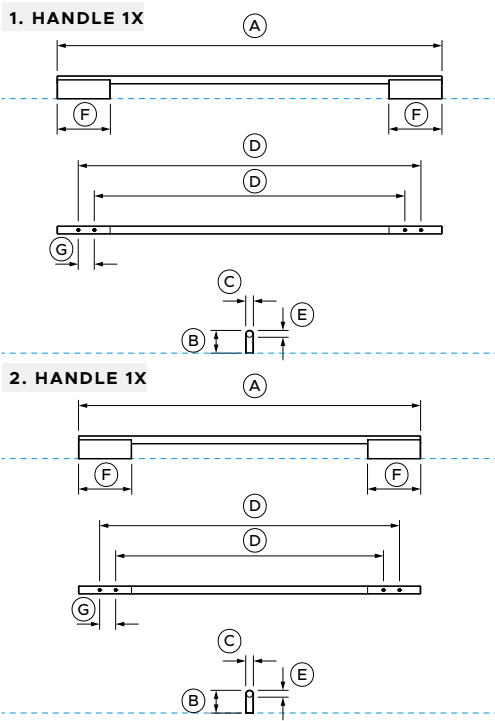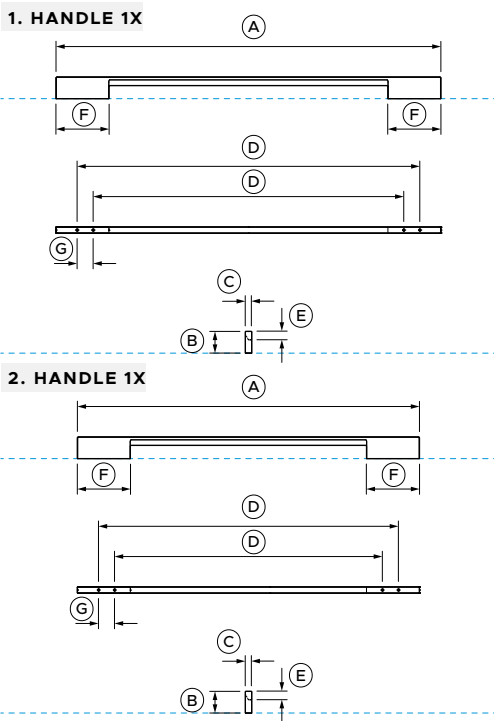

PRODUCT DIMENSIONS	
A	Overall length
B	Overall Height
C	Overall width
D	Distance between attachment holes - outer - inner
E	Thickness/diameter of handle rail
F	Off-stand width
G	Distance between holes

MINIMAL AHM1RD3084WB				
1. HANDLE		2. HANDLE		
inch	mm	inch	mm	
28 5/8	727	25 7/16	646	
1 5/8	41	1 5/8	41	
15/32	12	15/32	12	
25 1/2	647.5	22 5/16	566.5	
23 1/8	587	19 15/16	506	
5/8	16	5/8	16	
3 15/16	100	3 15/16	100	
1 3/16	30	1 3/16	30	

CONTEMPORARY AHD7RD3084WX				
1. HANDLE		2. HANDLE		
inch	mm	inch	mm	
28 5/8	727	25 7/16	646	
1 11/16	43	1 11/16	43	
9/16	14.5	9/16	14.5	
25 1/2	647.5	22 5/16	566.5	
23 1/8	587	19 15/16	506	
9/16	14.5	9/16	14.5	
3 15/16	100	3 15/16	100	
1 3/16	30	1 3/16	30	

PROFESSIONAL AHP3RD3084W, AHP3RD3084WBA, AHP3RD3084WDC				
1. HANDLE		2. HANDLE		
inch	mm	inch	mm	
26 21/32	677	23 15/32	596	
2 9/32	58	2 9/32	58	
1 7/16	37	1 15/32	37.5	
25 1/2	647.5	22 5/16	566.5	
23 1/8	587	19 15/16	506	
1	25.5	1	25.5	
2 3/8	60	2 3/8	60	
1 3/16	30	1 3/16	30	

----- INDICATES PRODUCT DATUM

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com




COOLING - DOUBLE DOOR HANDLE KIT

Handle kit comes with 2 handles.

Handle 1. = Top panel
Handle 2. = Bottom panel

SCREWS

Handles comes with M5 X 1" (25mm) Pan Head Socket Screw (2 or 4 per handle) suits standard 7 1/2" (19mm) panel. Thicker panels may require counterboring or longer screws.

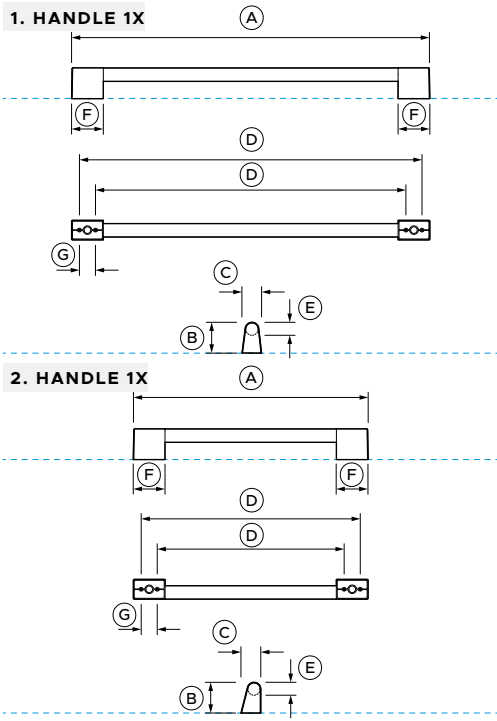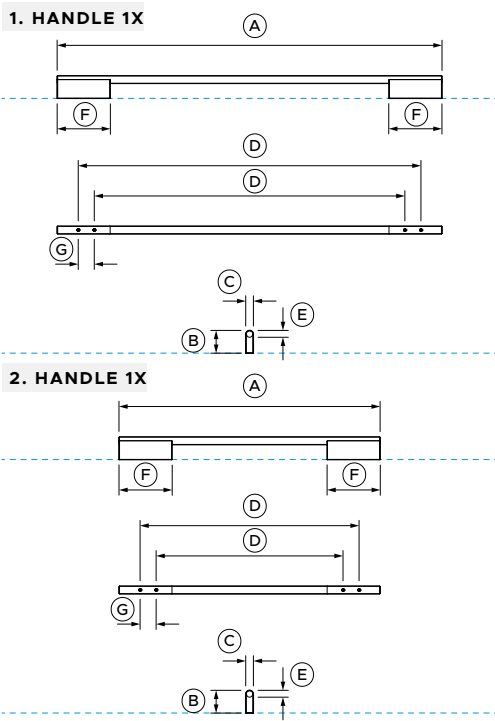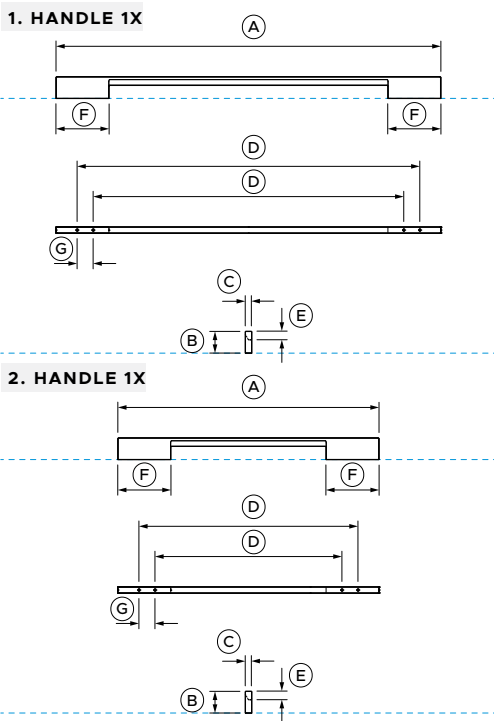

PRODUCT DIMENSIONS	
A	Overall length
B	Overall Height
C	Overall width
D	Distance between attachment holes - outer - inner
E	Thickness/diameter of handle rail
F	Off-stand width
G	Distance between holes

----- INDICATES PRODUCT DATUM

MINIMAL AHM1RD2484WB				
1. HANDLE		2. HANDLE		
inch	mm	inch	mm	
28 5/8	727	19 13/32	493	
1 5/8	41	1 5/8	41	
15/32	12	15/32	12	
25 1/2	647.5	16 5/16	414	
23 1/8	587	13 29/32	353	
5/8	16	5/8	16	
3 15/16	100	3 15/16	100	
1 3/16	30	1 3/16	30	

CONTEMPORARY AHD7RD2484WX				
1. HANDLE		2. HANDLE		
inch	mm	inch	mm	
28 5/8	727	19 13/32	493	
1 11/16	43	1 11/16	43	
9/16	14.5	9/16	14.5	
25 1/2	647.5	16 5/16	414	
23 1/8	587	13 29/32	353	
9/16	14.5	9/16	14.5	
3 15/16	100	3 15/16	100	
1 3/16	30	1 3/16	30	

PROFESSIONAL AHP3RD2484W, AHP3RD2484WBA, AHP3RD2484WDC				
1. HANDLE		2. HANDLE		
inch	mm	inch	mm	
26 21/32	677	17 15/32	443.5	
2 9/32	58	2 9/32	58	
1 7/16	37	1 15/32	37.5	
25 1/2	647.5	16 5/16	414	
23 1/8	587	13 29/32	353	
1	25.5	1	25.5	
2 3/8	60	2 3/8	60	
1 3/16	30	1 3/16	30	

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

COOLING - DOUBLE DOOR HANDLE KIT




Handle kit comes with 2 handles.

PROFESSIONAL HANDLES

Handle 1. = Top panel
Handle 2. = Bottom panel

SCREWS

Handles comes with M5 X 1" (25mm) Pan Head Socket Screw (2 or 4 per handle) suits standard 7 1/2" (19mm) panel. Thicker panels may require counterboring or longer screws.

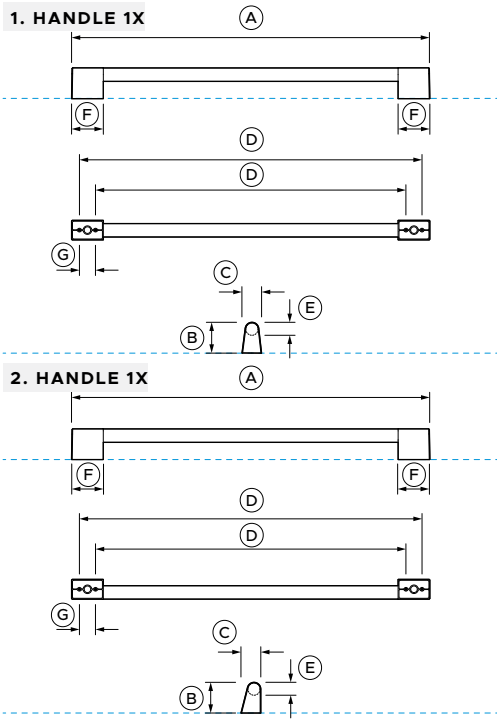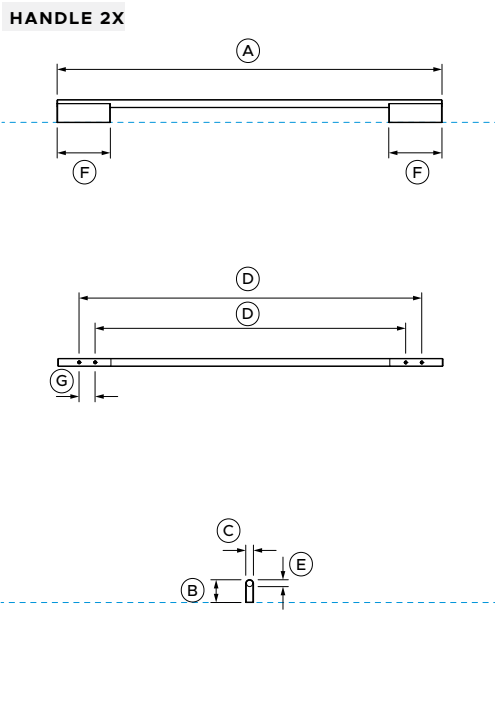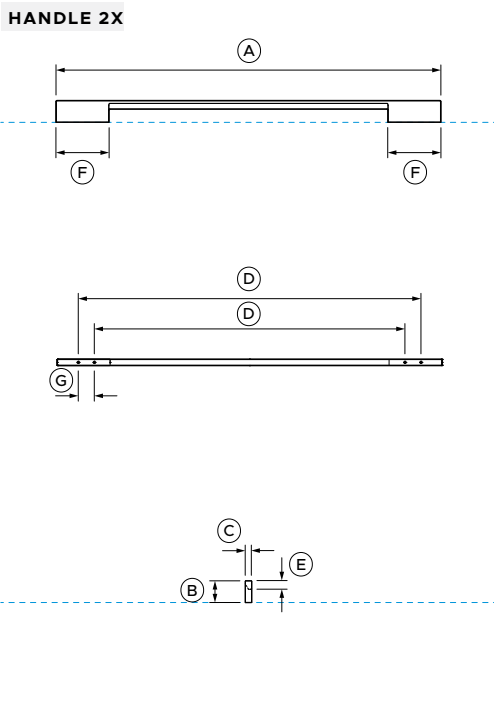

PRODUCT DIMENSIONS	
A	Overall length
B	Overall Height
C	Overall width
D	Distance between attachment holes - outer - inner
E	Thickness/diameter of handle rail
F	Off-stand width
G	Distance between holes

MINIMAL	
AHM1RD36WB	
inch	mm
28 5/8	727
1 5/8	41
15/32	12
25 1/2	647.5
23 1/8	587
5/8	16
3 15/16	100
1 3/16	30

CONTEMPORARY	
AHD7RD36WX	
inch	mm
28 5/8	727
1 11/16	43
9/16	14.5
25 1/2	647.5
23 1/8	587
9/16	14.5
3 15/16	100
1 3/16	30

PROFESSIONAL			
AHP3RD36W			
1. HANDLE		2. HANDLE	
inch	mm	inch	mm
26 21/32	677	26 21/32	677
2 9/32	58	2 9/32	58
1 7/16	37	1 15/32	37.5
25 1/2	647.5	25 1/2	647.5
23 1/8	587	23 1/8	587
1	25.5	1	25.5
2 3/8	60	2 3/8	60
1 3/16	30	1 3/16	30

----- INDICATES PRODUCT DATUM

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

COOLING - DOUBLE DOOR HANDLE KIT




Handle kit comes with 2 handles

Handle 1. = Top panel

Handle 2. = Bottom panel



SCREWS

Handles comes with M5 X 1" (25mm) Pan Head Socket Screw (2 or 4 per handle) suits standard 7 1/2" (19mm) panel. Thicker panels may require counterboring or longer screws.

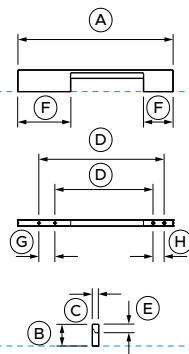PLACEMENT ON PRODUCT**1. HANDLE 1X****2. HANDLE 1X****MINIMAL**



AHM1RDB74LB, AHM1RDB74RB

1. HANDLE		2. HANDLE	
inch	mm	inch	mm
20 19/32	523	11 17/32	293
1 5/8	41	1 5/8	41
15/32	12	15/32	12
18 3/8	467	9 11/32	237
16 3/8	415.5	7 5/16	185.5
5/8	16	5/8	16
3 15/16	100	3 15/16	100
2 3/16	56	2 3/16	56
1 3/16	30	1 3/16	30
27/32	21	27/32	21

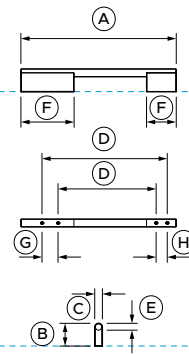1. HANDLE 1X**2. HANDLE 1X****CONTEMPORARY**

AHD7RDB74X

1. HANDLE		2. HANDLE	
inch	mm	inch	mm
20 19/32	523	11 17/32	293
1 11/16	43	1 11/16	43
9/16	14.5	9/16	14.5
18 3/8	467	9 11/32	237
16 3/8	415.5	7 5/16	185.5
9/16	14.5	9/16	14.5
3 15/16	100	3 15/16	100
2 3/16	56	2 3/16	56
1 3/16	30	1 3/16	30
27/32	21	27/32	21

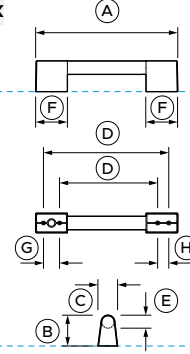1. HANDLE 1X**2. HANDLE 1X****PROFESSIONAL**

AHP3RDB74

1. HANDLE		2. HANDLE	
inch	mm	inch	mm
19 5/8	498.5	10 9/16	268.5
2 9/32	58	2 9/32	58
1 7/16	37	1 7/16	37
18 3/8	467	9 11/32	237
16 3/8	415.5	7 5/16	185.5
1	25.5		
60	60	60	60
-	-	-	-
-	-	-	-
1 3/16	30	1 3/16	30
27/32	21	27/32	21

PRODUCT DIMENSIONS

A	Overall length	20 19/32	523
B	Overall Height	1 5/8	41
C	Overall width	15/32	12
D	Distance between attachment holes		
- outer		18 3/8	467
- inner		16 3/8	415.5
E	Thickness/diameter of handle rail	5/8	16
F	Off-stand width		
- long side		3 15/16	100
- short side		2 3/16	56
G	Distance between holes (long side)	1 3/16	30
H	Distance between holes (short side)	27/32	21

----- INDICATES PRODUCT DATUM

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com




COOLING - TRIPLE DOOR HANDLE KIT

Handle kit comes with 3 handles.

Handle 1. = Bottom panel
Handle 2. = Top panels

SCREWS

Handles comes with M5 X 1" (25mm) Pan Head Socket Screw (2 or 4 per handle) suits standard 7 1/2" (19mm) panel. Thicker panels may require counterboring or longer screws.

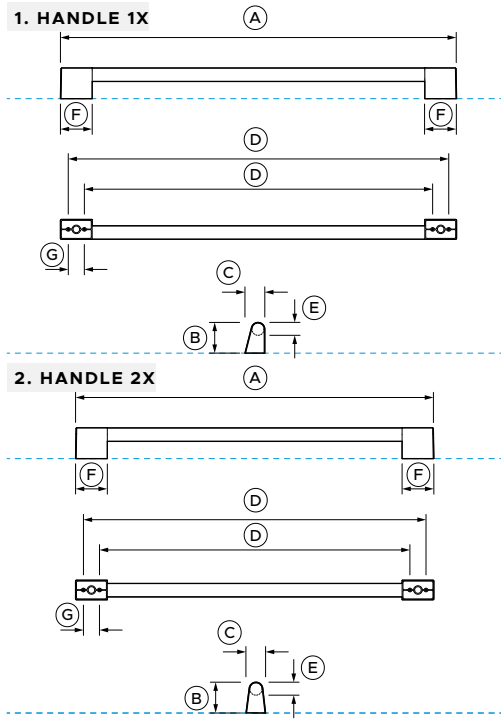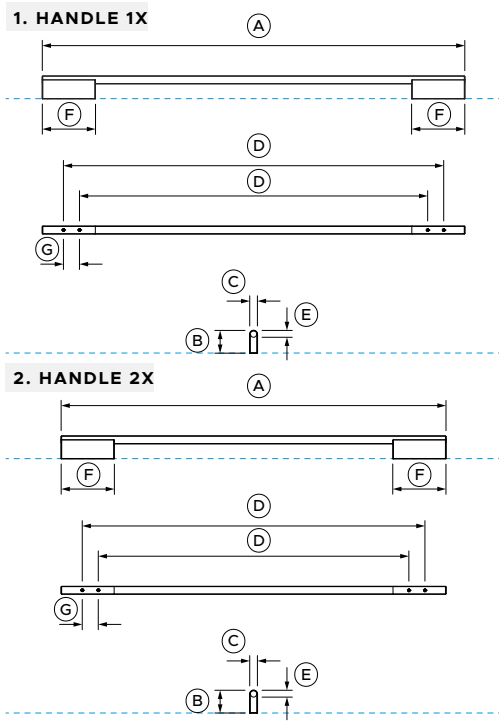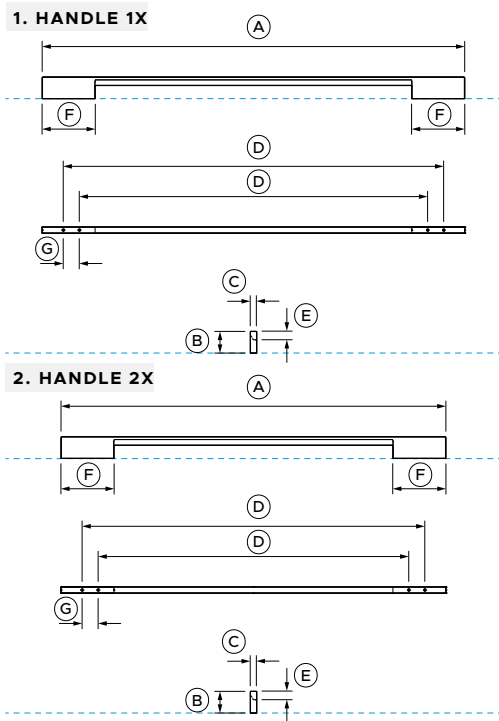

PRODUCT DIMENSIONS	
A	Overall length
B	Overall Height
C	Overall width
D	Distance between attachment holes - outer - inner
E	Thickness/diameter of handle rail
F	Off-stand width
G	Distance between holes

MINIMAL AHM1RD3684AB				
1. HANDLE		2. HANDLE		
inch	mm	inch	mm	
31 13/32	798	28 5/8	727	
1 5/8	41	1 5/8	41	
15/32	12	15/32	12	
28 5/16	719	25 1/2	647.5	
25 29/32	658	23 1/8	587	
5/8	16	5/8	16	
3 15/16	100	3 15/16	100	
1 3/16	30	1 3/16	30	

CONTEMPORARY AHD7RD3684AX				
1. HANDLE		2. HANDLE		
inch	mm	inch	mm	
31 13/32	798	28 5/8	727	
1 11/16	43	1 11/16	43	
9/16	14.5	9/16	14.5	
28 5/16	719	25 1/2	647.5	
25 29/32	658	23 1/8	587	
9/16	14.5	9/16	14.5	
3 15/16	100	3 15/16	100	
1 3/16	30	1 3/16	30	

PROFESSIONAL AHP3RD3684A, AHP3RD3684ABA, AHP3RD3684ADC				
1. HANDLE		2. HANDLE		
inch	mm	inch	mm	
29 15/32	748.5	26 21/32	677	
2 9/32	58	2 9/32	58	
1 15/32	37.5	1 7/16	37	
28 5/16	719	25 1/2	647.5	
25 29/32	658	23 1/8	587	
1	25.5	1	25.5	
2 3/8	60	2 3/8	60	
1 3/16	30	1 3/16	30	

----- INDICATES PRODUCT DATUM

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com




COOLING - TRIPLE DOOR HANDLE KIT

Handle kit comes with 3 handles.

Handle 1. = Top panels
Handle 2. = Bottom panel

SCREWS

Handles comes with M5 X 1" (25mm) Pan Head Socket Screw (2 or 4 per handle) suits standard 7 1/2" (19mm) panel. Thicker panels may require counterboring or longer screws.

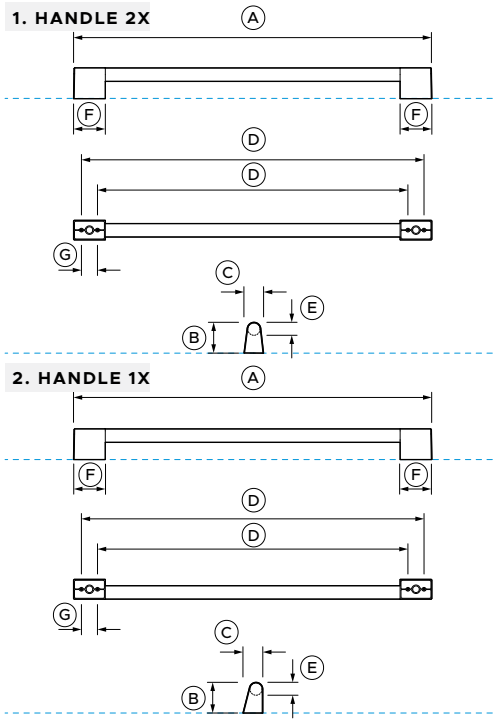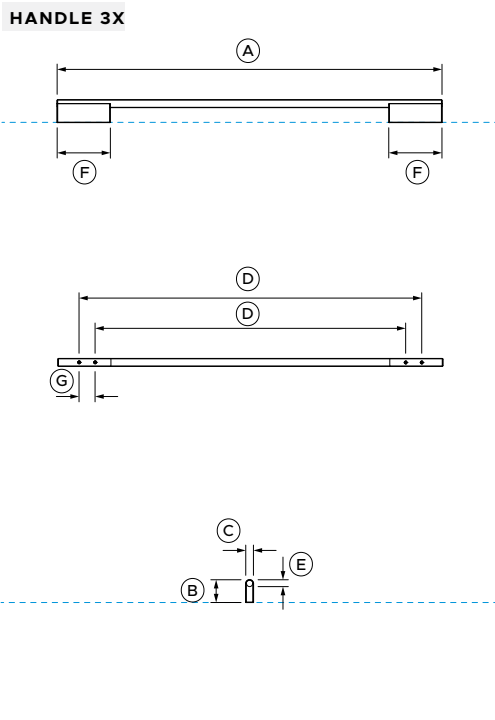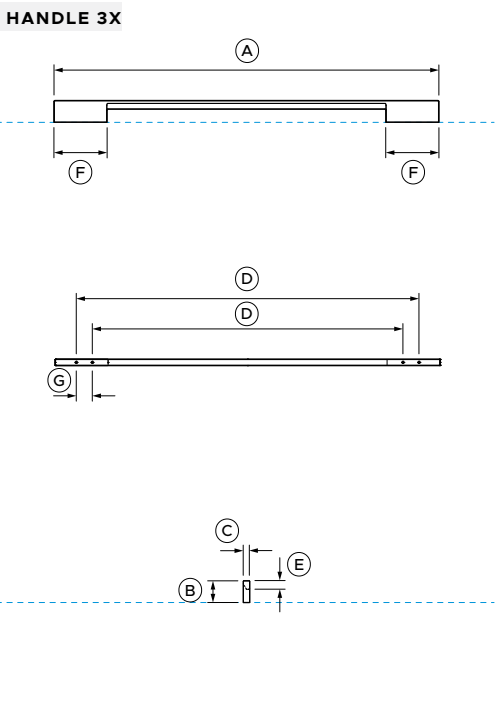

PRODUCT DIMENSIONS	
A	Overall length
B	Overall Height
C	Overall width
D	Distance between attachment holes - outer - inner
E	Thickness/diameter of handle rail
F	Off-stand width
G	Distance between holes

MINIMAL	
AHM1RD36AB	
inch	mm
28 5/8	727
1 5/8	41
15/32	12
25 1/2	647.5
23 1/8	587
5/8	16
3 15/16	100
1 3/16	30

CONTEMPORARY	
AHD7RD36AX	
inch	mm
28 5/8	727
1 11/16	43
9/16	14.5
25 1/2	647.5
23 1/8	587
9/16	14.5
3 15/16	100
1 3/16	30

PROFESSIONAL			
AHP3RD36A			
1. HANDLE		2. HANDLE	
inch	mm	inch	mm
26 21/32	677	26 21/32	677
2 9/32	58	2 9/32	58
1 7/16	37	1 15/32	37.5
25 1/2	647.5	25 1/2	647.5
23 1/8	587	23 1/8	587
1	25.5	1	25.5
2 3/8	60	2 3/8	60
1 3/16	30	1 3/16	30

----- INDICATES PRODUCT DATUM

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com




COOLING - TRIPLE DOOR HANDLE KIT

Handle kit comes with 3 handles.

Handle 1. = Top panels
Handle 2. = Bottom panel

SCREWS

Handles comes with M5 X 1" (25mm) Pan Head Socket Screw (2 or 4 per handle) suits standard 7 1/2" (19mm) panel. Thicker panels may require counterboring or longer screws.

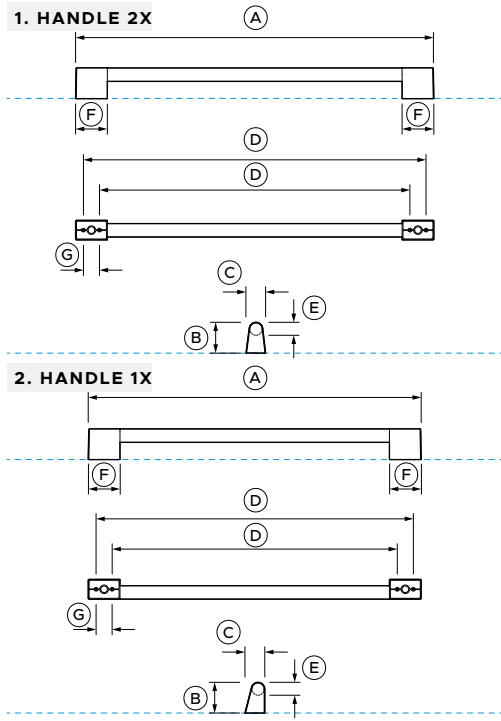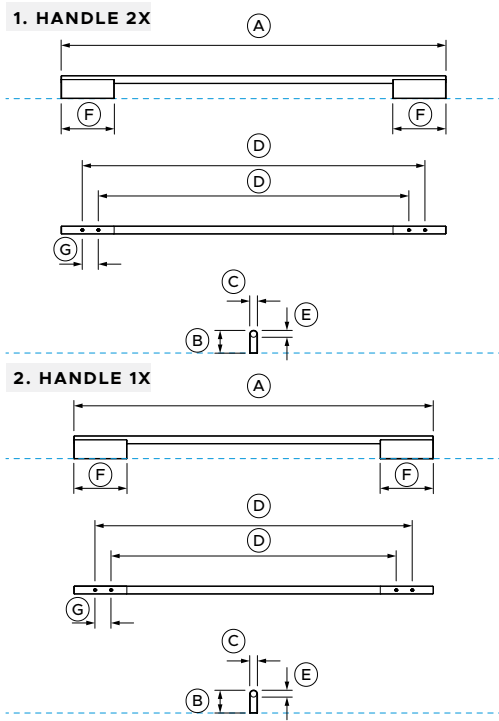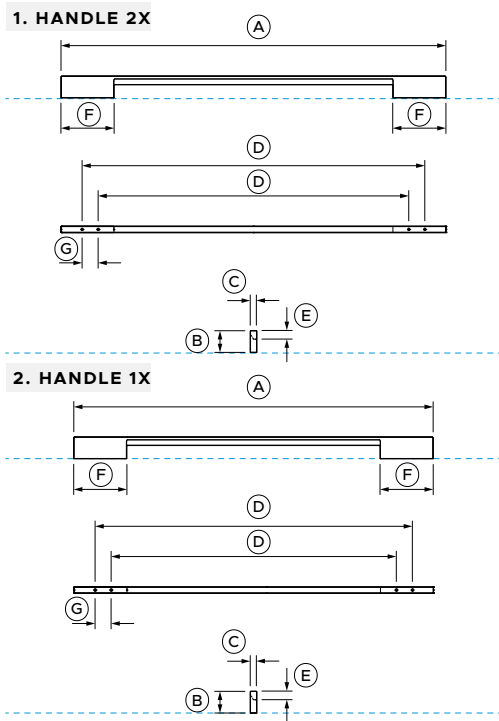

PRODUCT DIMENSIONS	
A	Overall length
B	Overall Height
C	Overall width
D	Distance between attachment holes - outer - inner
E	Thickness/diameter of handle rail
F	Off-stand width
G	Distance between holes

----- INDICATES PRODUCT DATUM

MINIMAL AHM1RD32AB			
1. HANDLE		2. HANDLE	
inch	mm	inch	mm
28 5/8	727	26 23/32	679
1 5/8	41	1 5/8	41
15/32	12	15/32	12
25 1/2	647.5	23 19/32	599.5
23 1/8	587	21 7/32	539
5/8	16	5/8	16
3 15/16	100	3 15/16	100
1 3/16	30	1 3/16	30

CONTEMPORARY AHD7RD32AX			
1. HANDLE		2. HANDLE	
inch	mm	inch	mm
28 5/8	727	26 23/32	679
1 11/16	43	1 11/16	43
9/16	14.5	9/16	14.5
25 1/2	647.5	23 19/32	599.5
23 1/8	587	21 7/32	539
9/16	14.5	9/16	14.5
3 15/16	100	3 15/16	100
1 3/16	30	1 3/16	30

PROFESSIONAL AHP3RD32A			
1. HANDLE		2. HANDLE	
inch	mm	inch	mm
26 21/32	677	24 3/4	629
2 9/32	58	2 9/32	58
1 7/16	37	1 15/32	37.5
25 1/2	647.5	23 19/32	599.5
23 1/8	587	21 7/32	539
1	25.5	1	25.5
2 3/8	60	2 3/8	60
1 3/16	30	1 3/16	30




IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

COOLING - UNDERCOUNTER

Model code comes with 1 handle.

SCREWS

Handles comes with M5 X 1" (25mm) Pan Head Socket Screw (2 or 4 per handle) suits standard 7 1/2" (19mm) panel. Thicker panels may require counterboring or longer screws.

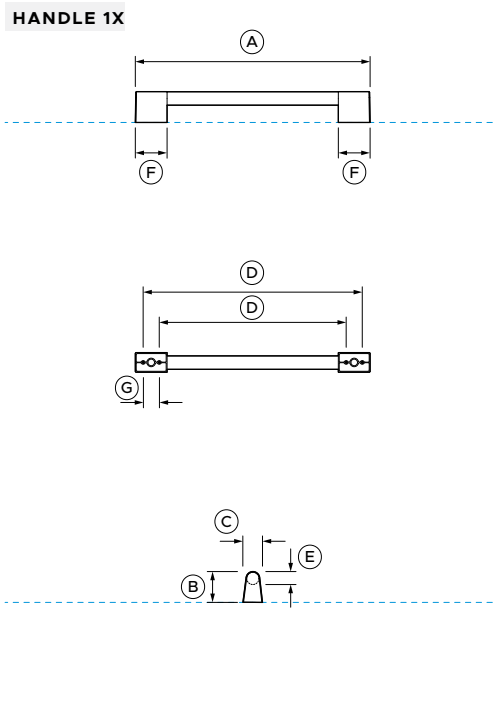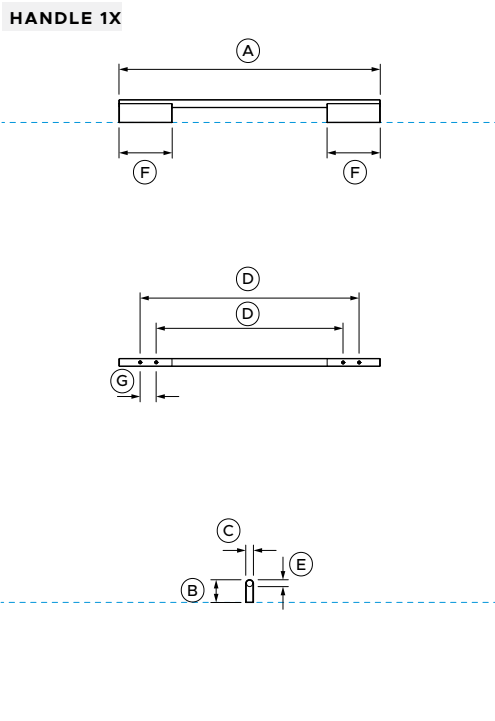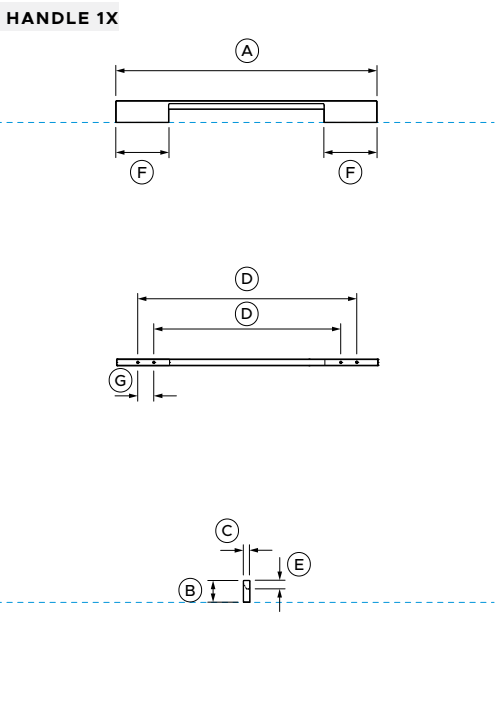

PRODUCT DIMENSIONS	
A	Overall length
B	Overall Height
C	Overall width
D	Distance between attachment holes - outer - inner
E	Thickness/diameter of handle rail
F	Off-stand width
G	Distance between holes

MINIMAL		
AHM1RD35B		
	inch	mm
A	19 7/16	493.5
B	1 5/8	41
C	15/32	12
D	16 5/16	414
D	13 29/32	353
E	5/8	16
F	3 15/16	100
G	1 3/16	30

CONTEMPORARY		
AHD7RD35X		
	inch	mm
A	19 7/16	493.5
B	1 11/16	43
C	9/16	14.5
D	16 5/16	414
D	13 29/32	353
E	9/16	14.5
F	3 15/16	100
G	1 3/16	30

PROFESSIONAL		
AHP3RD35		
	inch	mm
A	17 15/32	443.5
B	2 9/32	58
C	1 7/16	37
D	16 5/16	414
D	13 29/32	353
E	1	25.5
F	2 3/8	60
G	1 3/16	30

----- INDICATES PRODUCT DATUM

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com




The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

COOLING - COOLDRAWER™

Model code comes with 1 handle.

SCREWS

Handles comes with M5 X 1" (25mm) Pan Head Socket Screw (2 or 4 per handle) suits standard 7 1/2" (19mm) panel. Thicker panels may require counterboring or longer screws.

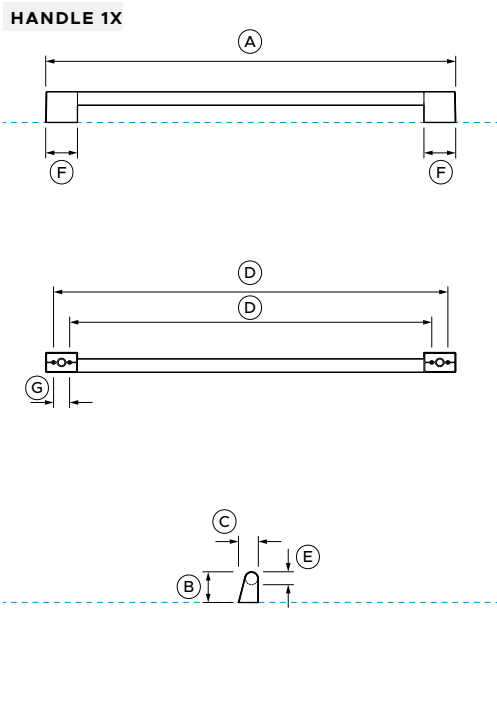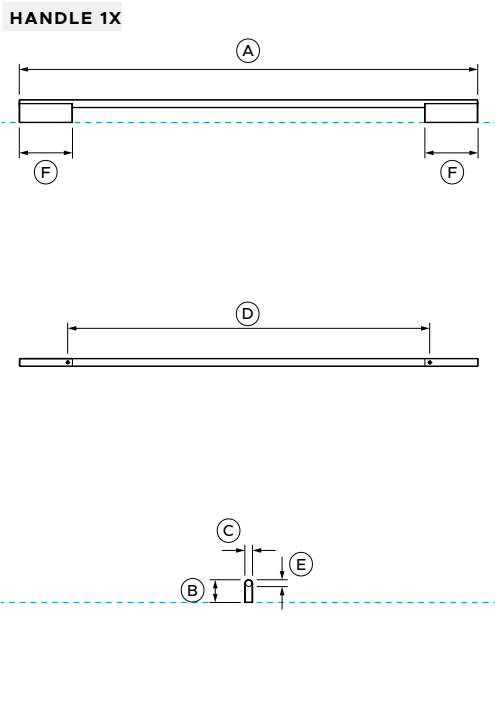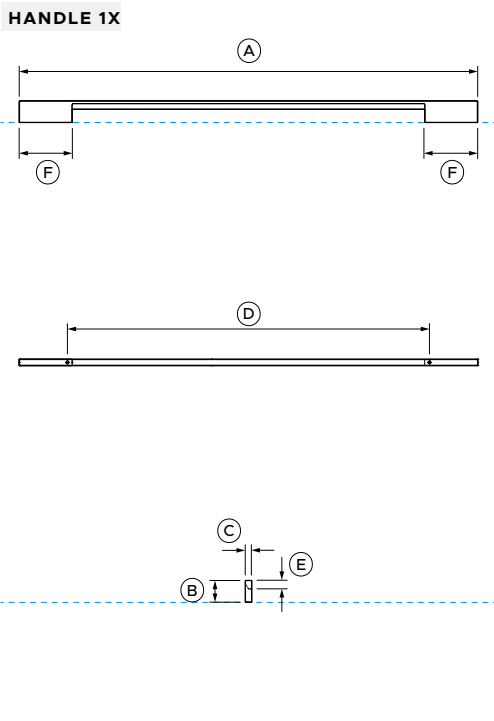

PRODUCT DIMENSIONS	
A	Overall length
B	Overall Height
C	Overall width
D	Distance between attachment holes
E	Thickness/diameter of handle rail
F	Off-stand width
G	Distance between holes

----- INDICATES PRODUCT DATUM

MINIMAL		
AHM1RD36SB		
	inch	mm
A	34 3/32	866
B	1 5/8	41
C	15/32	12
D	26 15/16	684
E	5/8	16
F	3 15/16	100
G	-	-

CONTEMPORARY		
AHD7RD36SX		
	inch	mm
A	34 3/32	866
B	1 11/16	43
C	9/16	14.5
D	26 15/16	684
E	9/16	14.5
F	3 15/16	100
G	-	-

PROFESSIONAL		
AHP3RD36S		
	inch	mm
A	30 1/2	774.5
B	2 9/32	58
C	1 15/32	37.5
D	outer 29 5/16 inner 26 15/16	outer 745 inner 684
E	1	25.5
F	2 3/8	60
G	1 3/16	30

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

