

**30" BUILT-IN OVENS AND COMPANIONS
CONTEMPORARY**

PLANNING GUIDE

SERIES 7, 9 & 11

DOUBLE OVEN | OB30DDPTDX2

OVEN | OB30SDPTDX2, OB30SD17PLX1, OB30SD14PLX1

STEAM OVEN | OS30SDTDX1, OS30SDLX1, OS30NDTDX1, OS30NDLX1

SPEED OVEN | OM30NDTDX1, OM30NDLX1

BUILT-IN COFFEE MAKER | EB24DSX1

TRIM KIT | TK7630NDX1

WARMING DRAWER | WB30SDX1-SET, WB30SDB1-SET

VACUUM SEAL DRAWER | VB30SDX1-SET, VB30SDB1-SET

FISHER & PAYKEL














This comprehensive Planning Guide provides you with the framework and tools to achieve your desired design outcome with Fisher & Paykel appliances. In this guide, you will find a range of conceptual, detailed and dimensional product information to bring your ideas to life and create spaces that truly reflect your vision.

CONTENTS

CONCEPT DESIGN	PAGE	DEVELOPED AND DETAILED DESIGN	PAGE	DEVELOPED AND DETAILED DESIGN	PAGE
Design Choices		Specification Guides - SERIES 7		Planning Considerations	34
Ovens and Companions - ALL MODELS	4	Oven	18	Cabinetry Preparation - ALL MODELS	35
Screen Size - ALL MODELS	5	Oven	19	Configurations - ALL MODELS	36
Configurations - ALL MODELS	6	Combination Steam Oven	20	Double Oven	37
Overview - ALL MODELS	7	Combination Steam Oven	21	Oven	38
		Convection Speed Oven	22	Combination Steam Oven	39
Specification Guides - SERIES 9 & 11		Dimensions - ALL MODELS	23	Combination Steam Oven	40
Double Oven	9	Power, Weight and Capacity - ALL MODELS	24	Convection Speed Oven	41
Oven	10			Built-in Coffee Maker with Trim Kit	42
Combination Steam Oven	11	Data Sheets	25	Warming Drawer	43
Combination Steam Oven	12	Double Oven	26	Vacuum Seal Drawer	44
Convection Speed Oven	13	Oven	27		
Built-in Coffee Maker with Trim Kit	14	Combination Steam Oven	28	Services	45
Warming Drawer	15	Combination Steam Oven	29	Power Cord Length and Location - COMPANIONS	46
Vacuum Seal Drawer	16	Convection Speed Oven	30	Power Cord Length and Location - STEAM AND SPEED	47
		Built-in Coffee Maker with Trim Kit	31	Power Cord Length and Location - OVENS	48
		Warming Drawer	32		
		Vacuum Seal Drawer	33		

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available on our website fisherpaykel.com

DESIGN CHOICES

COLOUR	OVENS			COMPANIONS			INSTALLATION OPTIONS
	OVEN	COMBINATION STEAM	CONVECTION SPEED	BUILT-IN COFFEE MAKER	WARMING DRAWER	VACUUM SEAL DRAWER	
STAINLESS STEEL	     SERIES 9 & 11			  			 INSTALLATION IN WALL
	     SERIES 7			 INSTALLATION UNDER-BENCH			

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available on our website fisherpaykel.com

SERIES 9 & 11

*

*

OVENS

STEAM AND SPEED OVENS

BUILT-IN COFFEE MAKER

DRAWERS

SCREEN SIZE

5"

INSTALLATION CONSIDERATIONS

All models can be installed together but consider screen size and product height for multiple installation.

SERIES 7

*

*

OVENS

STEAM AND SPEED OVENS

BUILT-IN OVENS

STEAM AND SPEED OVENS

SCREEN SIZE

2.4"

IMPORTANT NOTE

* Thickness of oven front and control panel (excl. handle and dials) on these models is 40mm. All other products are 20mm.


OVENS	
Double Oven	OB30DDPTDX2
Oven	OB30SDPTDX2
STEAM AND SPEED OVENS	
Combination Steam Oven	OS30SDTDX1
Combination Steam Oven	OS30NDTDX1
Convection Speed Oven	OM30NDTDX1

BUILT-IN COFFEE MAKER	
Built-In Coffee Maker	EB24DSX1
Trim Kit	TK7630NDX1
DRAWERS	
Warming Drawer	WB30SDX1-SET
Warming Drawer	WB30SDB1-SET
Vacuum Seal Drawer	VB30SDX1-SET
Vacuum Seal Drawer	VB30SDB1-SET


BUILT-IN OVENS	
Oven	OB30SDI7PLX1
Oven	OB30SDI4PLX1
STEAM AND SPEED OVENS	
Combination Steam Oven	OS30SDLX1
Combination Steam Oven	OS30NDLX1
Convection Speed Oven	OM30NDLX1

STACKED INSTALLATION


Stack Height
46 7/8" (1191mm)




Stack Height
48 19/32" (1234mm)



Stack Height
52 13/32" (1331mm)

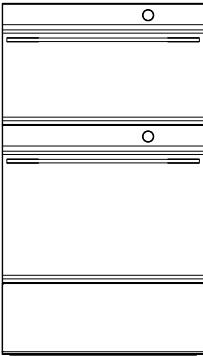


Stack Height
56 1/32" (1423mm)

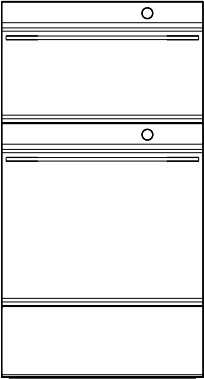


GRID INSTALLATION

Stack Height
45 11/32" (1152mm)

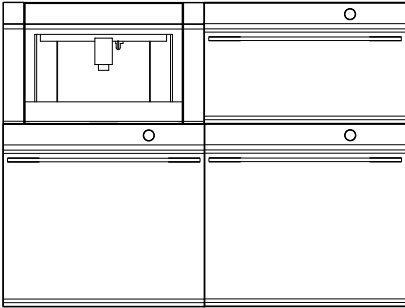


ROW INSTALLATION

Stack Height
28 25/32" (731mm)

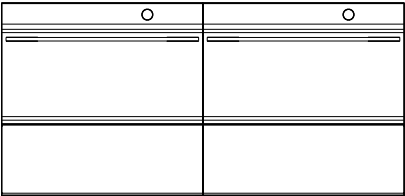

Stack Height
27 1/4" (692mm)

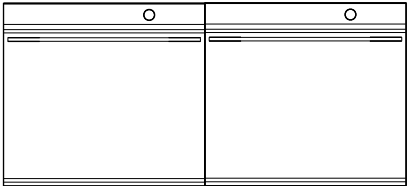


CONSIDERATIONS

Different configurations possible,
consider heights for row and grid
installations.

Note: Stack Height is overall product height with minimum clearance above appliance front panel to upper cabinetry front panel or appliance.

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available on our website fisherpaykel.com

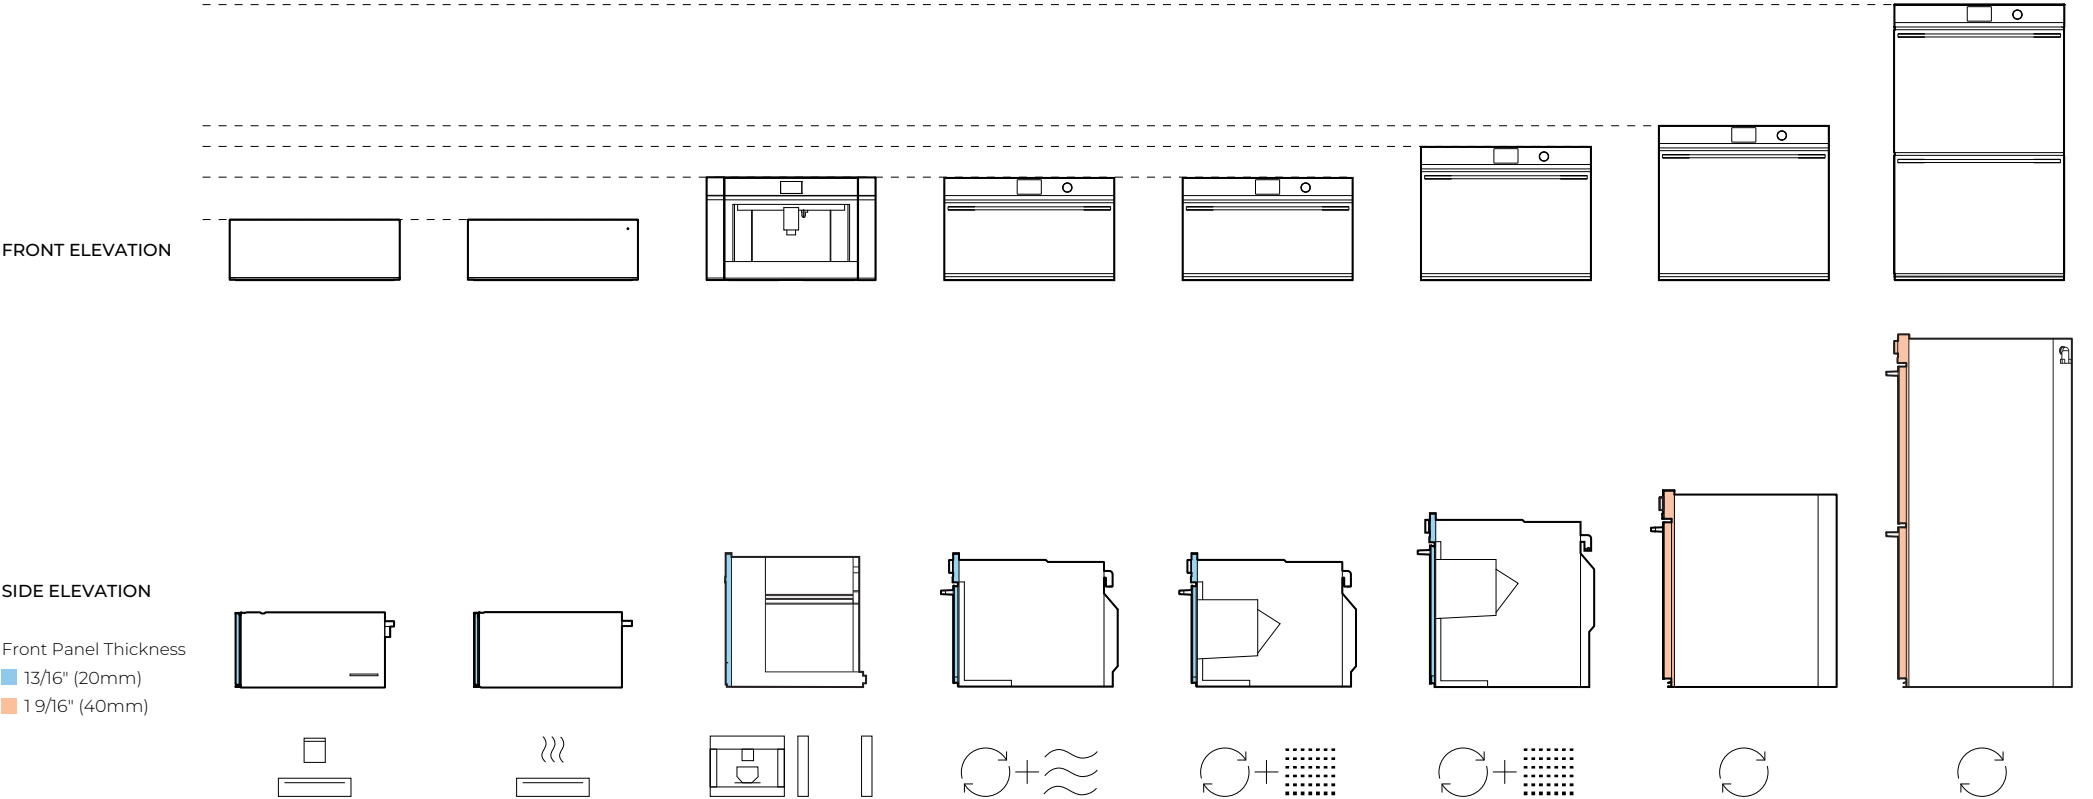

	WARMING DRAWER	VACUUM SEAL DRAWER	BUILT-IN COFFEE MAKER WITH TRIM KIT	CONVECTION SPEED OVEN	COMBINATION STEAM OVEN	COMBINATION STEAM OVEN	OVEN	DOUBLE OVEN
Series	Series 9	Series 9	Series 9	Series 9 and Series 7	Series 9 and Series 7	Series 11 and Series 7	Series 9 and Series 7	Series 9
Model Code	VB30SDX1-SET VB30SDB1-SET	WB30SDX1-SET WB30SDB1-SET	EB24DSX1 Trim Kit TK7630NDX1	OM30NDTDX1 OM30NDLX1	OS30NDTDX1 OS30NDLX1	OS30SDTDX1 OS30SDLX1	OB30SDPTDX2 OB30SD17PLX1 OB30SD14PLX1	OB30DDPTDX2
Interface	-	-	4.3" Touchscreen	5" Touchscreen, Dial Control 2.4" Screen, Dial Control	5" Touchscreen, Dial Control 2.4" Screen, Dial Control	5" Touchscreen, Dial Control 2.4" Screen, Dial Control	5" Touchscreen, Dial Control 2.4" Screen, Dial Control	5" Touchscreen
Height	10 11/16" (271mm)	10 11/16" (271mm)	18" (458mm)	18" (458mm)	18" (458mm)	23 9/16" (598mm)	27 3/16" (690mm)	48 1/2" (1232mm)
Front Panel Thickness	13/16" (20mm)	13/16" (20mm)	13/16" (20mm)	13/16" (20mm)	13/16" (20mm)	13/16" (20mm)	1 9/16" (40mm)	1 9/16" (40mm)

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available on our website fisherpaykel.com

SPECIFICATION GUIDE

SERIES 9 & 11



OVERVIEW

Enhance your kitchen design with the refined styling of the 30" Double Oven. Complementing the other products in our Contemporary collection, you can create a coherent, considered look with ease. Intuitive controls and the performance to deliver perfect results make this double oven beautiful to use.

PRODUCTS

OB30DDPTDX2
Double Oven, 30", 17 Function, Self-cleaning, 4.1 + 4.1cu ft, Touchscreen, Dial Controls, Stainless Steel

SERIES & STYLE

Series 9
Contemporary

FEATURES

- 1 Designed to fit flush with cabinetry
- 2 Styled to perfectly match our Contemporary kitchen appliances
- 3 Generous 4.1cu ft total capacity per oven
- 4 High-resolution, user-friendly touch display
- 5 Guided cooking and recipes
- 6 Perfect results from a variety of oven functions
- 7 Even heat distribution throughout with AeroTech™ technology
- 8 Self-cleaning
- 9 CoolTouch door
- "0 Wi-Fi/Connected capability though the SmartHQ™ app

ACCESSORIES

- 1 Full Extension Sliding Shelves*
- 2 Self-cleaning-proof side racks*
- 3 Roasting dish, tray and rack*
- 4 Wired Temperature Sensor*

*Included with product

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available on our website fisherpaykel.com



OVERVIEW

Enhance your kitchen design with the refined styling. Complementing the other products in our Contemporary collection, you can create a coherent, considered look with ease. Intuitive controls and the performance to deliver perfect results make this oven beautiful to use.

PRODUCTS

OB30SDPTDX2
Oven, 30", 17 Function, 4.1cu ft, Touchscreen, Dial Controls, Stainless Steel

SERIES & STYLE

Series 9
Contemporary

FEATURES

- 1 Designed to fit flush with cabinetry
- 2 Styled to perfectly match our Contemporary kitchen appliances
- 3 Generous 4.1cu ft total capacity
- 4 High-resolution, user-friendly touch display
- 5 Guided cooking and recipes
- 6 Perfect results from a variety of oven functions
- 7 Even heat distribution throughout with AeroTech™ technology
- 8 Self-cleaning
- 9 Wireless Temperature Sensor precisely monitors cooking in real time. Purchased separately
- "0 Wi-Fi/Connected capability though the SmartHQ™ app

ACCESSORIES

- 1 Full Extension Sliding Shelves*
- 2 Self-cleaning-proof side racks*
- 3 Roasting dish, tray and rack*
- 4 Wired Temperature Sensor*
- 5 Wireless temperature sensor - Part WTSC1

*Included with product

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available on our website fisherpaykel.com



OVERVIEW

With timeless Contemporary styling, the compact Combination Steam Oven fits seamlessly into any kitchen. As a companion product, this Steam Oven is designed to install easily and fit perfectly with other companion products. It features 23 functions, including steam-only, convection-only, or a combination of both. Reduce the need for oils and fats with six standalone steam functions, perfect for creating flavorful and healthy restaurant-quality meals at home. Beautiful to use, the large 5” touchscreen interface has simple and intuitive guided cooking, helping to ensure perfect results.

PRODUCTS

OS30SDTDX1
Combination Steam Oven, 30", 23 Function

SERIES & STYLE

Series 11
Contemporary

ACCESSORIES

- 1 2x Full Extension Sliding Shelves*
- 2 Step Down Wire Shelf*
- 3 Broil Pan*
- 4 Broil Rack*
- 5 Broil Grid*

FEATURES

- 1 Contemporary style, designed to fit flush with cabinetry
- 2 Generous 3cu ft total capacity with six shelf positions
- 3 Intuitive, large 5" touchscreen display with illuminated dial
- 4 23 oven functions including Steam, Sous Vide, Air Fry and Crisp Regenerate
- 5 Guided touchscreen cooking makes it simple to cook by food, function or recipe
- 6 Moisture control and even heat distribution thanks to ActiveVent and AeroTech™ technology
- 7 47.3 fl oz water tank
- 8 Wi-Fi enabled and works with the SmartHQ™ app for remote control and notifications
- 9 Steam Clean function ensures a spotless oven with minimal effort
- "0 Soft open and close door

ACCESSORIES

- 6 Perforated Large Steam Dish*
- 7 Perforated Small Steam Dish*
- 8 Large Steam Dish*
- 9 Wired Temperature Sensor*
- "0 Catalytic Panel*
- "1 Descale solution* - 2 sachets (Part 580925)

*Included with product

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available on our website fisherpaykel.com



OVERVIEW

With timeless Contemporary styling, the compact Combination Steam Oven fits seamlessly into any kitchen. As a companion product, this Steam Oven is designed to install easily and fit perfectly with other companion products. It features 23 functions, including steam-only, convection-only, or a combination of both. Reduce the need for oils and fats with six standalone steam functions, perfect for creating flavorful and healthy restaurant-quality meals at home. Beautiful to use, the large 5” touchscreen interface has simple and intuitive guided cooking, helping to ensure perfect results.

PRODUCTS

OS30NDTDX1
Combination Steam Oven, 30", 23 Function

SERIES & STYLE

Series 9
Contemporary

ACCESSORIES

- 1 Full Extension Sliding Shelf*
- 2 Wire Shelf*
- 3 Broil Pan*
- 4 Broil Rack*
- 5 Perforated Large Steam Dish

FEATURES

- 1 Contemporary style, designed to fit flush with cabinetry
- 2 Generous 1.9 cu ft total capacity with six shelf positions
- 3 Intuitive, large 5" touchscreen display with illuminated dial
- 4 23 oven functions including Steam, Sous Vide, Air Fry and Crisp Regenerate
- 5 Guided touchscreen cooking makes it simple to cook by food, function or recipe
- 6 Moisture control and even heat distribution thanks to ActiveVent and AeroTech™ technology
- 7 47.3 fl oz water tank
- 8 Wi-Fi enabled and works with the SmartHQ™ app for remote control and notifications
- 9 Steam Clean function ensures a spotless oven with minimal effort
- "0 Soft open and close door

ACCESSORIES

- 6 Perforated Small Steam Dish*
- 7 Large Steam Dish*
- 8 Wired Temperature Sensor*
- 9 Catalytic Panel*
- "0 Descale solution* - 2 sachets (Part 580925)

*Included with product

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available on our website fisherpaykel.com



OVERVIEW

With timeless Contemporary styling, the Convection Speed Oven fits seamlessly into any kitchen. As a companion product, this Speed Oven is designed to install easily and fit perfectly with other companion products such as the Combination Steam Oven, or Vacuum Seal Drawer. A flexible appliance that pairs the speed of microwave cooking with oven technology, which can crisp and brown as it cooks. Featuring 22 cooking functions on an intuitive touch display for easy programming of desired cooking mode and duration.

PRODUCTS

OM30NDTDX1
Convection Speed Oven, 30", 22 Function

SERIES & STYLE

Series 9
Contemporary

FEATURES

- 1 Contemporary style, designed to fit flush with cabinetry
- 2 1.7 cu ft total capacity
- 3 Intuitive, large 5" touchscreen display with illuminated dial
- 4 Four microwave-only functions, 14 traditional oven functions, and four combination functions
- 5 A Wired Temperature Sensor precisely monitors cooking in real time
- 6 Guided cooking, with the option to access additional functionality via the SmartHQ™ app
- 7 Wi-Fi/Connected capability through the SmartHQ™ app
- 8 Soft open and close door

ACCESSORIES

- 1 Wire Shelf*
- 2 Chrome Shelf Runner*
- 3 Step Down Wire Shelf*
- 4 Broil Rack*
- 5 Glass Tray*
- 6 Wired Temperature Sensor*

*Included with product

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available on our website fisherpaykel.com



OVERVIEW

The Built-in Coffee Maker features a stylish stainless steel finish and can be installed in multiple configurations to suit kitchen design and preference. With 13 beverage options, our Coffee Maker is designed to consistently pour delicious coffee – from Flat White to Latte or Americano. Favourite coffee styles are memorized for a fast brew with the push of a button. A programmable timer turns the Coffee Maker on at the ideal time each day, while the conical burr grinder delivers a consistent grind for a perfect coffee.

PRODUCTS

EB24DSX1

Built-in Coffee Maker, 24", Touchscreen, Stainless Steel

TK7630NDX1

Companion Trim Kit, 30", Stainless Steel

Note: Trim Kit purchased separately.

SERIES & STYLE

Series 9

Contemporary

FEATURES

- 1 Designed to pair perfectly with 30" ovens and companion products
- 2 Stylish stainless steel finish
- 3 Install in multiple configurations to suit your kitchen design
- 4 Intuitive touch display
- 5 13 functions to suit any taste and selection – from Espresso to Latte
- 6 Personalized coffee and smart self-learning menu preferences
- 7 Stainless steel conical burr grinder with 13 coarseness positions
- 8 15 bar pump pressure
- 9 Self-cleaning function and easy to empty coffee grounds container and drip tray
- "0 84ft oz (2.5L) water tank capacity

ACCESSORIES


- 1 Thermal milk jug 17ft oz (0.5L)*
- 2 Water filter*
- 3 Coffee spoon*
- 4 Extractable steam outlet*
- 5 Descaling agent bottle*

*Included with product

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available on our website fisherpaykel.com



Warming Drawer, WB30SDB1-SET Black Glass, paired with Oven OB30SDPTDX2

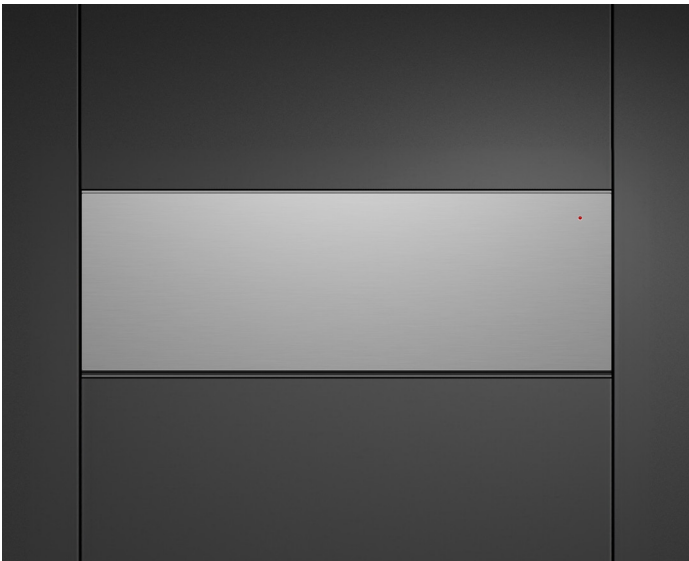

Warming Drawer, WB30SDX1-SET Stainless Steel

OVERVIEW

Designed to complement our Minimal and Contemporary ovens, these warming drawers are handle-free, and push-to-open for a coherent, considered look. Beautiful to use, with capacitive touch controls and six tailored functions for warming, proofing, dehydrating and slow cook. Pair with other companion products to create a kitchen suite for every need.

PRODUCTS

WB30SDB1-SET

Warming Drawer, 30", Black Glass

WB30SDX1-SET

Warming Drawer, 30", Stainless Steel

SERIES & STYLE

Series 9

Contemporary - Black Glass

Series 9

Contemporary - Stainless Steel

FEATURES

- 1 Styled to perfectly match our Minimal and Contemporary kitchen appliances
- 2 Seamless pairing with other companion products in either stylish black reflective glass or brushed stainless steel
- 3 Push-to-open drawer
- 4 Easy-to-use capacitive touch controls
- 5 Automatic timing and switch-off functionality
- 6 Easy-to-clean, smooth-glass base
- 7 Room for 16 standard-sized place settings
- 8 Versatile with six tailored programmes for warming, proofing, dehydrating and slow cook

ACCESSORIES


- 1 Accessory rack for optimizing space*

*Included with product

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available on our website fisherpaykel.com



Vacuum Seal Drawer, VB30SDB1-SET Back Glass, paired with Oven OB30SDPTDX2

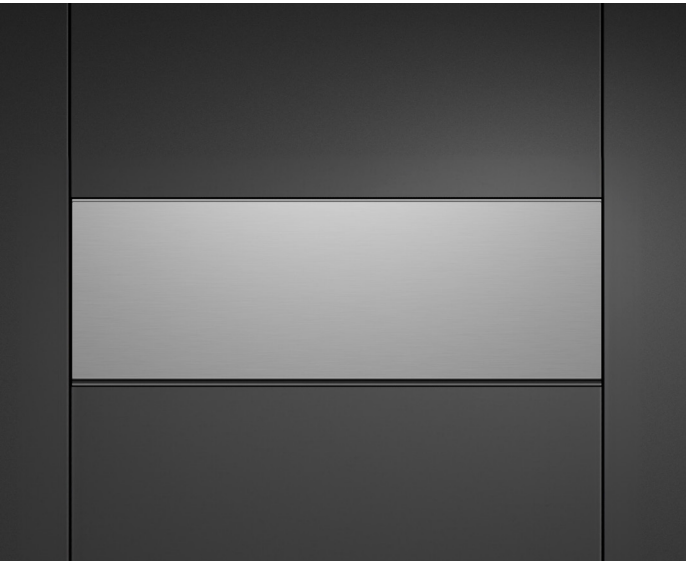

Vacuum Seal Drawer, VB30SDX1-SET Stainless Steel

OVERVIEW

Designed to complement our Combination Steam Ovens, these vacuum seal drawers are handle-free, and push-to-pen for a coherent, considered look. Beautiful to use, with capacitive touch controls and three levels of vacuuming and sealing to deliver perfect results. Pair with other companion products to create a kitchen suite for every need.

PRODUCTS

VB30SDB1-SET

Vacuum Seal Drawer, 30", Black Glass

VB30SDX1-SET

Vacuum Seal Drawer, 30", Stainless Steel

SERIES & STYLE

Series 9

Contemporary - Black Glass

Series 9

Contemporary - Stainless Steel

FEATURES

- 1 Styled to perfectly match our Minimal and Contemporary kitchen appliances
- 2 Push-to-open drawer
- 3 Three levels of vacuum and heat sealing
- 4 Easy-to-use capacitive touch controls
- 5 Easy-to-clean stainless steel interior
- 6 Vacuum sealing for easy food portioning, marinating, storage and extended food life
- 7 Sealing to capture and intensify flavors and retain nutrients
- 8 Effortless preparation for sous vide cooking
- 9 External vacuuming to remove air from glass jars and bottles
- "0 Additional storage drawer

ACCESSORIES

- 1 Large vacuum bags - 50 Bags, Part 793034
- 2 Small vacuum bags - 50 Bags, Part 793033
- 3 Adapter accessory kit for external vacuuming*

*Included with product

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available on our website fisherpaykel.com

SPECIFICATION GUIDE

SERIES 7



OVERVIEW

Designed to fit seamlessly into any kitchen with Contemporary styling. Achieve perfect results with Aerotech™ technology which circulates heat evenly throughout the cavity, ideal for multi-shelf cooking. Beautiful to use, the intuitive interface and dial offer simple guided cooking, while Pyrolytic self-cleaning breaks down grime and grease, to keep the oven pristine for the next use.

PRODUCTS

OB30SD17PLX1

Oven, 30", 18 Function, Self-Cleaning, Dial Controls, Stainless Steel

SERIES & STYLE

Series 7
Contemporary

FEATURES

- 1 Designed to fit flush with cabinetry
- 2 Styled to perfectly match our Contemporary kitchen appliances
- 3 Generous 4.1cu ft total capacity
- 4 Intuitive 2.4" screen with illuminated dial
- 5 Perfect results from a variety of oven functions
- 6 Even heat distribution throughout with AeroTech™ technology
- 7 Pyrolytic self-cleaning function breaks down food residue for an easy clean
- 8 CoolTouch door
- 9 Wired Temperature Sensor
- "0 Wi-Fi/Connected capability though the SmartHQ™ app

ACCESSORIES

- 1 Full Extension Sliding Shelves*
- 2 Self-cleaning-proof side racks*
- 3 Roasting dish, tray and rack*
- 4 Food probe*

*Included with product

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available on our website [fisherpaykel.com](https://www.fisherpaykel.com)



OVERVIEW

Designed to fit seamlessly into any kitchen with Contemporary styling. Achieve perfect results with Aerotech™ technology which circulates heat evenly throughout the cavity, ideal for multi-shelf cooking. Beautiful to use, the intuitive interface and dial offer simple guided cooking, while Pyrolytic self-cleaning breaks down grime and grease to keep the oven pristine for the next use.

PRODUCTS

OB30SD14PLX1

Oven, 30", 18 Function, Self-Cleaning, Dial Controls, Stainless Steel

SERIES & STYLE

Series 7
Contemporary

FEATURES

- 1 Designed to fit flush with cabinetry
- 2 Styled to perfectly match our Contemporary kitchen appliances
- 3 Generous 4.1cu ft total capacity
- 4 Intuitive 2.4" screen with illuminated dial
- 5 Perfect results from a variety of oven functions
- 6 Even heat distribution throughout with AeroTech™ technology
- 7 Pyrolytic self-cleaning function breaks down food residue for an easy clean
- 8 CoolTouch door
- 9 Wired Temperature Sensor
- "0 Wi-Fi/Connected capability though the SmartHQ™ app

ACCESSORIES

- 1 Full Extension Sliding Shelves*
- 2 Self-cleaning-proof side racks*
- 3 Roasting dish, tray and rack*
- 4 Wired Temperature Sensor*

*Included with product

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available on our website fisherpaykel.com



OVERVIEW

With timeless Contemporary styling, the Combination Steam Oven fits seamlessly into any kitchen. It features 23 functions, including steam-only, convection-only, or a combination of both. Reduce the need for oils and fats with six standalone steam functions, perfect for creating flavourful and healthy restaurant-quality meals at home. Beautiful to use, the 2.4" screen interface has simple and intuitive guided cooking, helping to ensure perfect results.

PRODUCTS

OS30SDLX1
Combination Steam Oven, 30", 23 Function, Dial Controls

SERIES & STYLE

Series 7
Contemporary

ACCESSORIES

- 1 Telescopic Clip-On Runners*
- 2 Step Down Wire Shelf*
- 3 Wire Shelf*
- 4 Broiling Pan*
- 5 Broil Rack*

FEATURES

- 1 Contemporary style, designed to fit flush with cabinetry
- 2 Generous 3 cu ft total capacity with six shelf positions
- 3 Intuitive 2.4" screen with illuminated dial
- 4 23 oven functions including Steam, Sous Vide, Air Fry and Crisp Regenerate
- 5 Guided touchscreen cooking makes it simple to cook by food, function or recipe
- 6 Moisture control and even heat distribution thanks to ActiveVent and AeroTech™ technology
- 7 47.3 fl oz water tank
- 8 Wi-Fi enabled and works with the SmartHQ™ app for remote control and notifications
- 9 Steam Clean function ensures a spotless oven with minimal effort
- "0 Soft open and close door

ACCESSORIES

- 6 Perforated Large Steam Dish*
- 7 Large Steam Dish*
- 8 Descale solution* - 2 sachets (Part 580925)

*Included with product

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available on our website fisherpaykel.com



OVERVIEW

With timeless Contemporary styling, the Combination Steam Oven fits seamlessly into any kitchen. As a companion product, this oven is designed to install easily and fit perfectly with other companion products such as the Combination Microwave Oven, or Vacuum Seal Drawer. It features 18 functions, including steam-only, convection-only, or a combination of both. Reduce the need for oils and fats with six standalone steam functions, perfect for creating flavorful and healthy restaurant-quality meals at home.

PRODUCTS

OS30NDLX1
Combination Steam Oven, 30", 18 Function

SERIES & STYLE

Series 7
Contemporary

ACCESSORIES

- 1 Telescopic Clip-On Runners*
- 2 Step Down Wire Shelf*
- 3 Wire Shelf*
- 4 Broiling Pan*
- 5 Broil Rack*

FEATURES

- 1 Contemporary style, designed to fit flush with cabinetry
- 2 Generous 1.9 cu ft total capacity with four shelf positions
- 3 Intuitive 2.4" screen with illuminated dial
- 4 18 oven functions including Steam, Sous Vide, Air Fry and Vent Bake
- 5 Guided touchscreen cooking makes it simple to cook by food, function or recipe
- 6 Moisture control and even heat distribution thanks to ActiveVent and AeroTech™ technology
- 7 47.3 fl oz water tank
- 8 Wi-Fi enabled and works with the SmartHQ™ app for remote control and notifications
- 9 Steam Clean function ensures a spotless oven with minimal effort
- "0 Soft open and close door

ACCESSORIES

- 6 Perforated Large Steam Dish*
- 7 Large Steam Dish*
- 1 Catalytic Panels*
- 8 Descale solution* - 2 sachets (Part 580925)

*Included with product

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available on our website fisherpaykel.com



OVERVIEW

With timeless Contemporary styling, the Convection Speed Oven fits seamlessly into any kitchen. As a companion product, this Speed Oven is designed to install easily and fit perfectly with other companion products such as the Combination Steam Oven, or Vacuum Seal Drawer. A flexible appliance that pairs the speed of microwave cooking with oven technology, which can crisp and brown as it cooks. Featuring 19 cooking functions on an intuitive touch display for easy programming of desired cooking mode and duration.

FEATURES

- 1 Contemporary style, designed to fit flush with cabinetry
- 2 1.7 cu ft total capacity
- 3 Intuitive 2.4" screen with illuminated dial
- 4 Four microwave-only functions, 14 traditional oven functions, and four combination functions
- 5 Wi-Fi/Connected capability through the SmartHQ™ app
- 6 Soft open and close door

PRODUCTS

OM30NDLX1
Convection Speed Oven, 30", 19 Function

ACCESSORIES

- 1 Wire Shelf*
- 2 Chrome Shelf Runners*
- 3 Step Down Wire Shelf*
- 4 Broil Rack*
- 5 Glass Tray*









*Included with product

SERIES & STYLE

Series 7
Contemporary

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available on our website fisherpaykel.com

PRODUCT DIMENSIONS	<th><th><th></th></th></th>	<th><th></th></th>	<th></th>	
--------------------	-----------------------------	--------------------	-----------	--

								
	VACUUM SEAL DRAWER VB30SDX1-SET VB30SDB1-SET	WARMING DRAWER WB30SDX1-SET WB30SDB1-SET	BUILT-IN COFFEE MAKER EB24DSX1 Trim Kit TK7630NDX1	CONVECTION SPEED OVEN OM30NDTDX1 OM30NDLX1	COMBINATION STEAM OVEN OS30NDTDX1 OS30NDLX1	COMBINATION STEAM OVEN OS30SDTDX1 OS30SDLX1	OVEN OB30SDPTDX2 OB30SD17PLX1 OB30SD14PLX1	DOUBLE OVEN OB30DDPTDX2
POWER REQUIREMENTS								
Supply	120 V, 60 Hz	120 V, 60 Hz	120 V, 60 Hz	208 V or 240 V, 60 Hz	208 V or 240 V, 60 Hz	208 V or 240 V, 60 Hz	208 V or 240 V, 60 Hz	208 V or 240 V, 60 Hz
Service	10 A	10 A	10 A	20 A	20 A	20 A	20 A	40 A
Connection	Flex cord 70 7/8" (1800mm)	Flex cord 70 7/8" (1800mm)	Flex cord 66 15/16" (1700mm)	Hard wired 59 1/16" (1500mm)	Hard wired 78 3/4" (2000mm)	Hard wired 78 3/4" (2000mm)	Hard wired 78 3/4" (2000mm)	Hard wired 78 3/4" (2000mm)
WEIGHT								
Packaged	148lb (67kg)	66lb (30kg)	EB24DSXBB1 72lb (33kg)	121lb (55kg)	121lb (55kg)	152lb (69kg)	247lb (110kg)	405lb (184kg)
Unpackaged	121lb (55kg)	55lb (25kg)	52lb (24kg)	101lb (46kg)	101lb (46kg)	119lb (54kg)	165lb (75kg)	306lb (139kg)
CAPACITY								
Total oven	-	-		1.7cu ft (49L)	1.9cu ft (55L)	3cu ft (85L)	4.1cu ft (115L)	4.1cu ft (115L) per oven
Total water tank	-	-	84.5 fl oz (2.5L)	-	47.3 fl oz (1.4L)	47.3 fl oz (1.4L)	-	-

SERVICES


For more information on cord length, water supply and electrical requirements, refer to the 'Services' section of this Planning Guide.

WATER

All Coffee Makers and Steam Ovens have internal water tanks which need to be filled manually.
No external water supply is required.

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available on our website fisherpaykel.com

DATA SHEETS

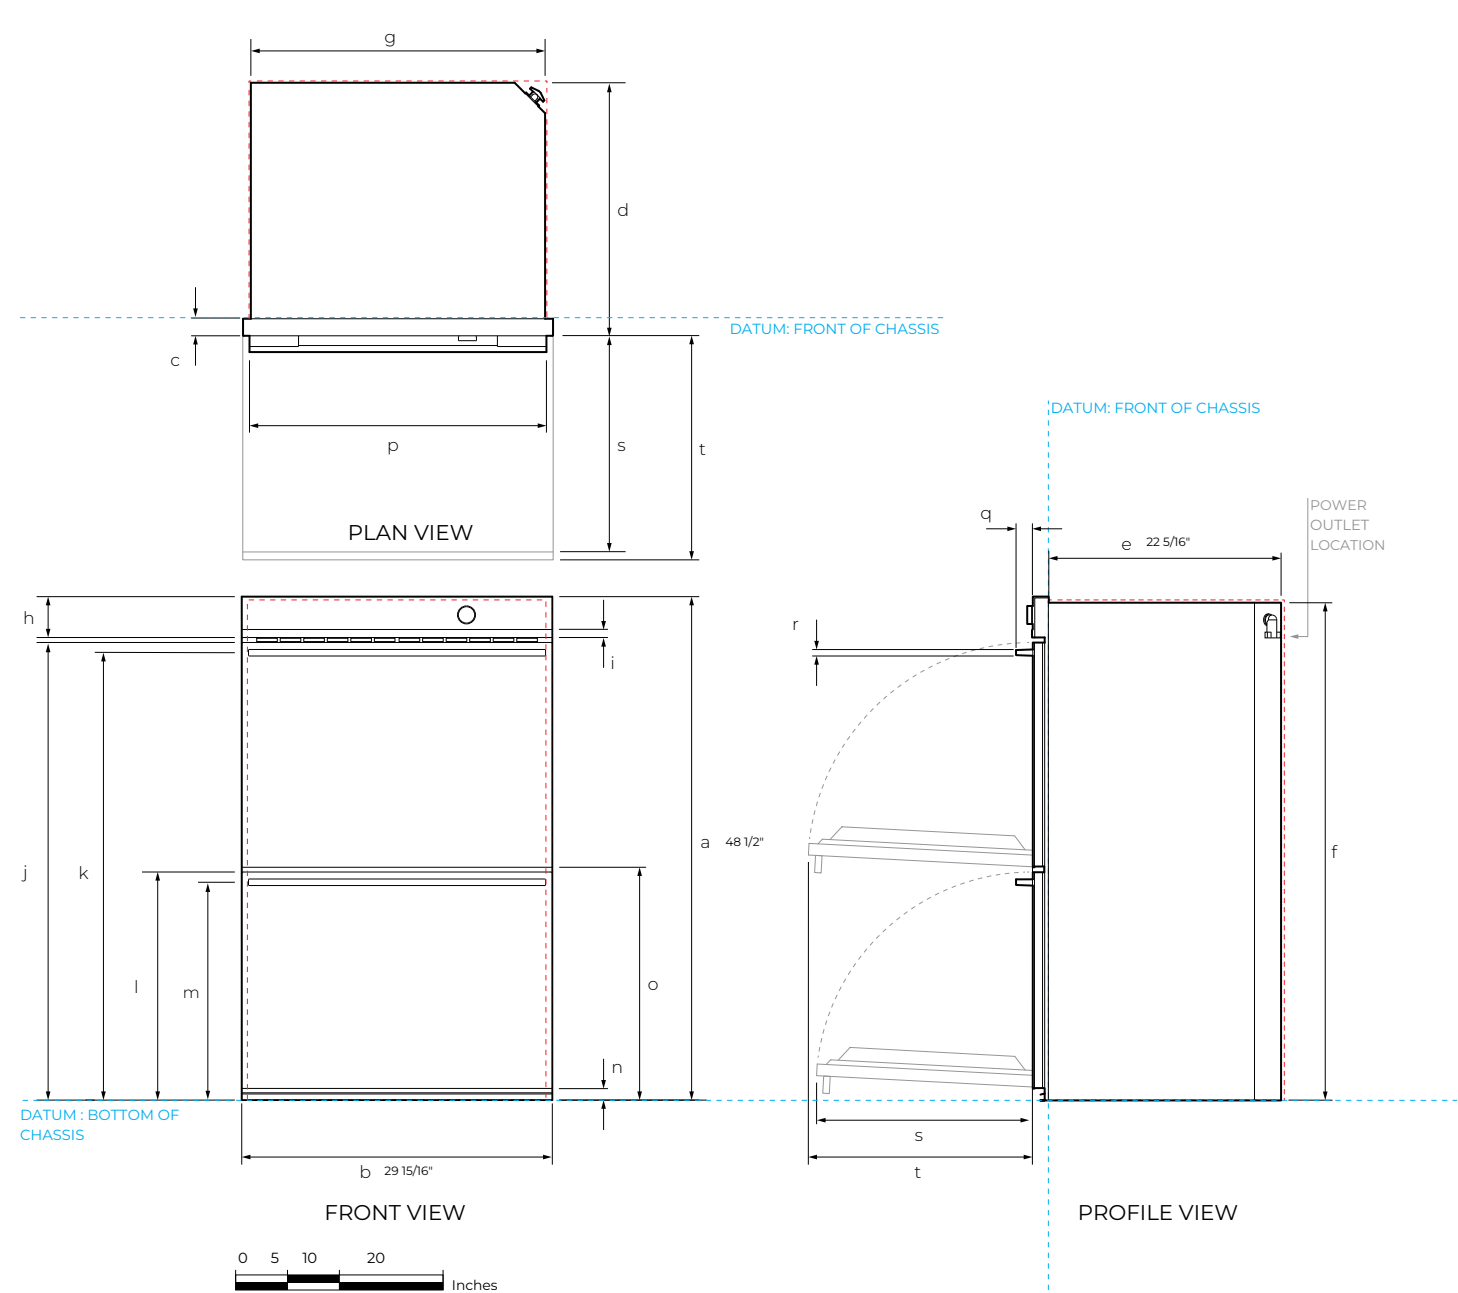

Model no:

Double Oven, 30" - OB30DDPTDX2

Product Dimensions

	in	mm
A Overall height of product	48 1/2	1232
B Overall width of product	29 15/16	760
C Depth of control panel (excludes handle, front stainless steel trim and dial)	19/16	40
D Depth of chassis and control panel (excludes handle, front stainless steel trim and dial)	24	609
E Depth of chassis	22 7/16	569
F Height of chassis	47 15/16	1218
G Width of chassis	28 3/8	720
H Height of control panel	3 15/16	100
I Height of stainless steel trim on control panel	3/4	20
J Height from bottom datum to top of upper oven door	44 1/16	1120
K Height from bottom datum to centerline upper of handle	43 1/8	1095
L Height from bottom datum to top of lower oven door	22	558
M Height from bottom datum to centerline of lower handle	21	533
N Height from bottom datum to bottom of lower door	11/8	29
O Height from bottom datum to bottom of upper door	22 7/16	570
P Width of handle	28 5/8	727
Q Depth of handle	1 5/8	42
R Thickness of handle	5/8	16
S Depth of lower door when open (measured from front of door)	20 7/8	530
T Depth of upper door when open (measured from front of door)	21 11/16	550


Minimum Clearances- Flush Installation

	in	mm
Minimum inside height of cavity	48 3/16	1224
Minimum inside width of cavity	28 1/2	724
Minimum inside depth of cavity*	24 3/16	615
Minimum clearance above oven control panel to upper cabinetry front panel or appliance	1/16	2
Minimum clearance between bottom of oven chassis to lower cabinetry front panel or appliance	1/16	2

*Measured from front of control panel
Note: Depending on cabinet panel thickness a rebate around control panel might be required.
IMPORTANT NOTE: For full installation and clearance details please refer to our installation manual.

INDICATES PRODUCT DATUM
INDICATES CABINETRY CLEARANCES

IMPORTANT NOTE: Throughout this guide, dimensions may vary by $\pm 2\text{mm}$ (1/16"). Please read the Installation Guide for detailed information on installing the product. For full installation instructions visit fisherpaykel.com

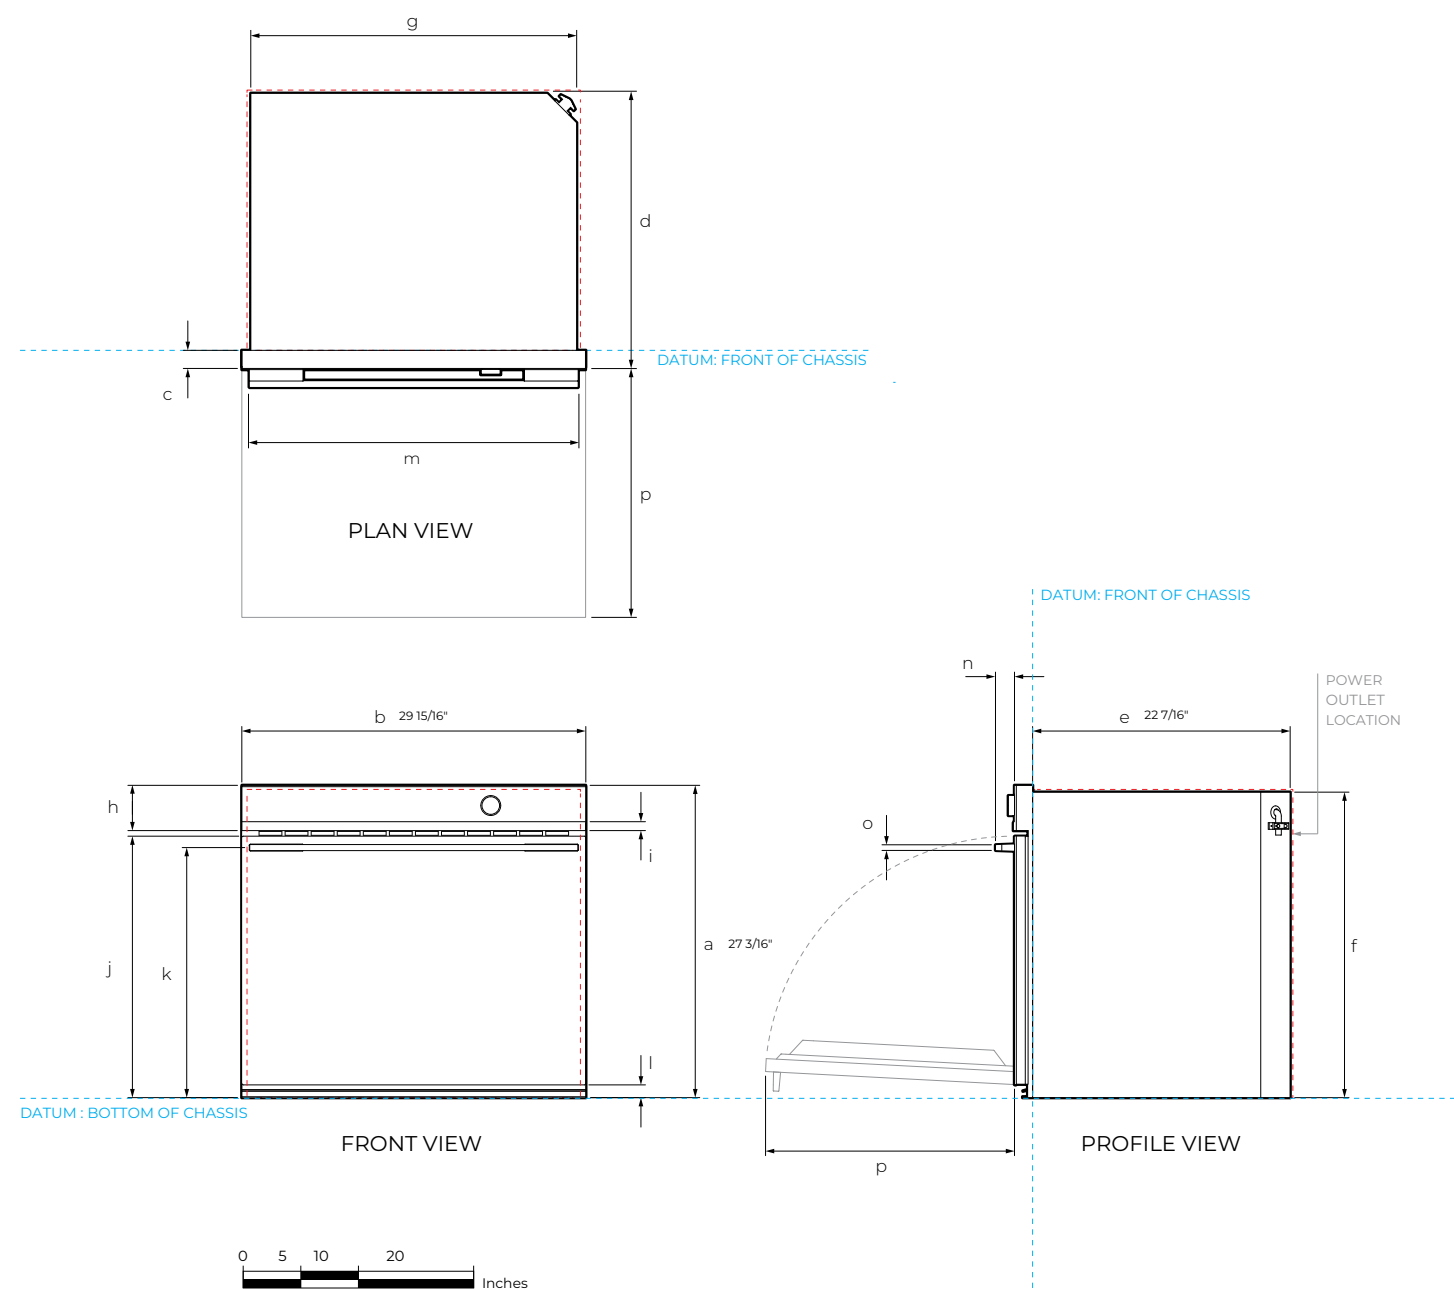

Model no:
Oven, 30" - OB30SDPTDX2, OB30SD14PLX1

Product Dimensions	in	mm
A Overall height of product	27 3/16	690
B Overall width of product	29 15/16	760
C Depth of control panel (excludes handle, front black aluminum trim and dial)	19/16	40
D Depth of chassis and control panel (excludes handle, front black aluminum trim and dial)	24	609
E Depth of chassis	22 7/16	569
F Height of chassis	26 9/16	674
G Width of chassis	28 3/8	720
H Height of control panel	3 15/16	100
I Height of black aluminum trim on control panel	3/4	20
J Height from bottom datum to top of oven door	22 3/4	578
K Height from bottom datum to centerline of handle	21 3/4	553
L Height from bottom datum to bottom of door	1 1/8	28
M Width of handle	28 5/8	727
N Depth of handle	1 5/8	42
O Thickness of handle	5/8	16
P Depth of door when open (measured from front of door)	21 11/16	550


Minimum Clearances- Flush Installation	in	mm
Minimum inside height of cavity	26 13/16	681
Minimum inside width of cavity	28 1/2	724
Minimum inside depth of cavity*	24 3/16	615
Minimum clearance above oven control panel to upper cabinetry front panel or appliance	1/16	2
Minimum clearance between bottom of oven chassis to lower cabinetry front panel or appliance	1/16	2

*Measured from front of control panel
Note: Depending on cabinet panel thickness a rebate around control panel might be required. Ensure a 3/16" (5mm) minimum clearance is maintained between the top of the oven chassis and the cabinetry. Ensure the oven is not bearing any weight from cabinetry or products installed above.


IMPORTANT NOTE: For full installation and clearance details please refer to our installation manual.

INDICATES PRODUCT DATUM
INDICATES CABINETRY CLEARANCES


IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the Installation Guide for detailed information on installing the product. For full installation instructions visit fisherpaykel.com

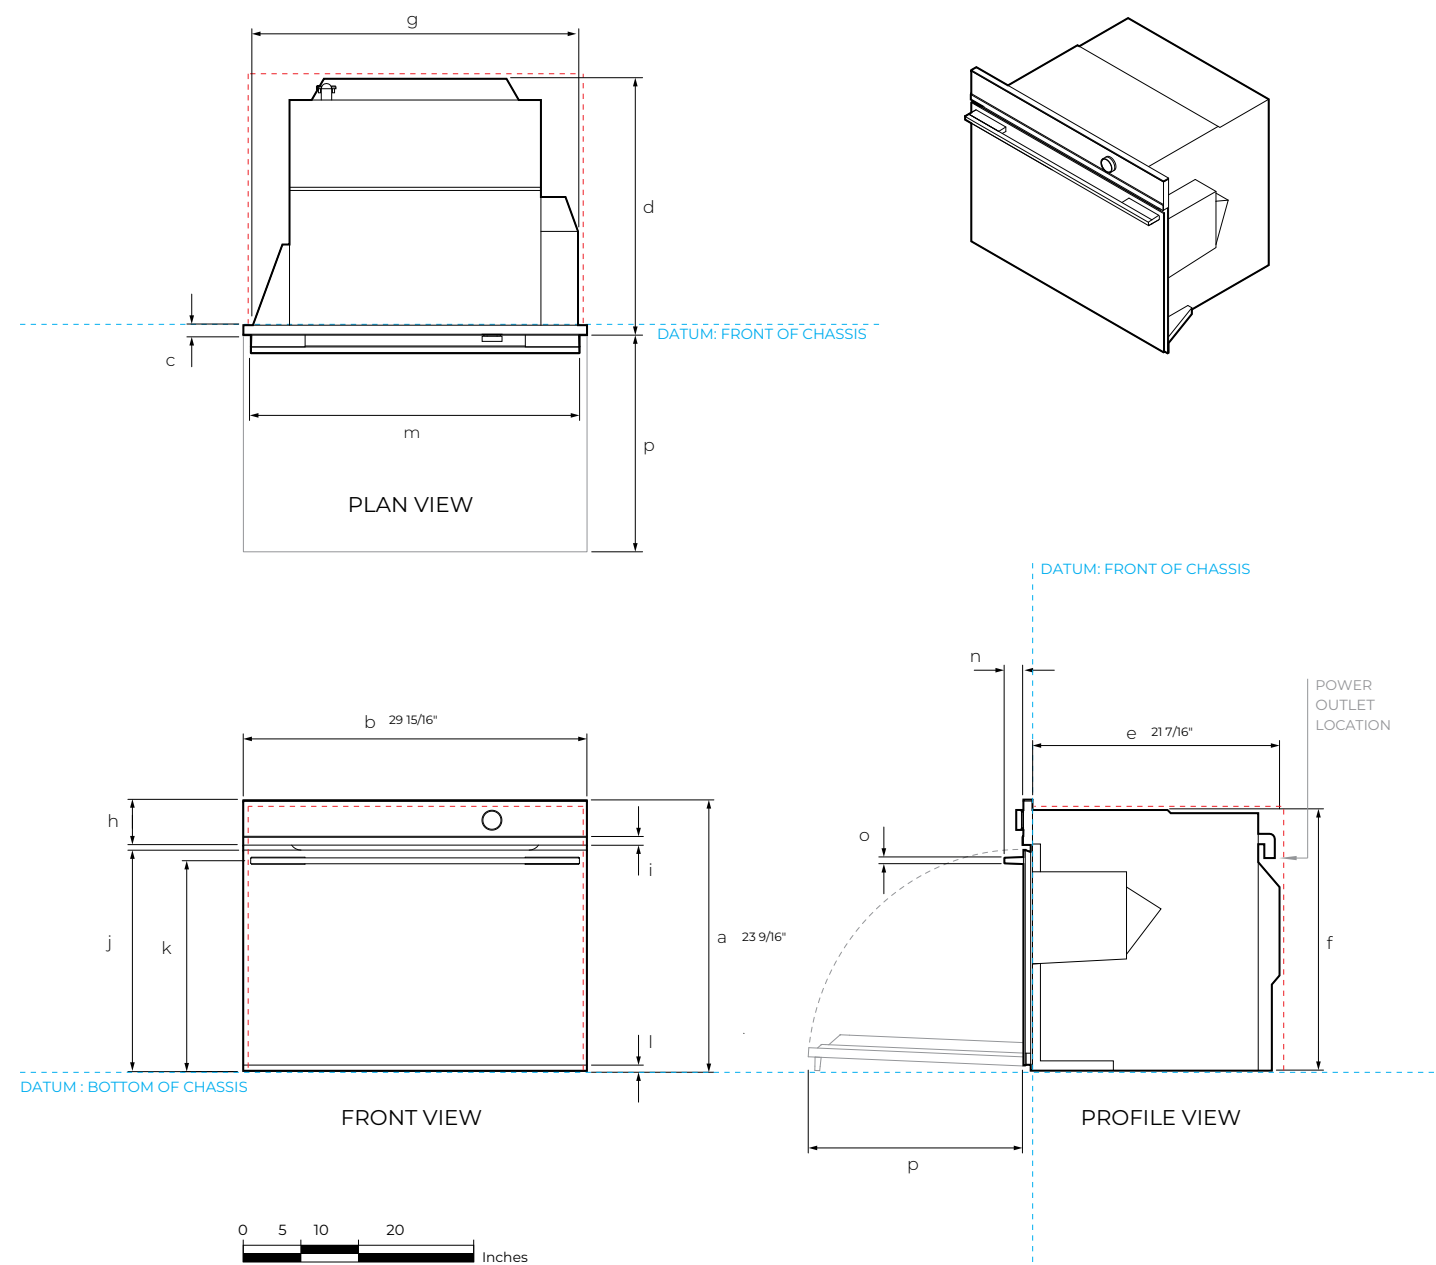

Model no:		
Combination Steam Oven, 30" - OS30SDTDX1, OS30SDLX1		
Product Dimensions	in	mm
A Overall height of product	23 9/16	598
B Overall width of product	29 15/16	760
C Depth of control panel (excludes handle, front black aluminum trim and dial)	13/16	20
D Depth of chassis and control panel (excludes handle, front black aluminum trim and dial)	22 1/4	565
E Depth of chassis	22 7/16	545
F Height of chassis	22 5/8	575
G Width of chassis	28 3/8	720
H Height of control panel	3 15/16	100
I Height of black aluminum trim on control panel	3/4	20
J Height from bottom datum to top of oven door	19 3/16	487
K Height from bottom datum to centerline of handle	18 1/4	464
L Height from bottom datum to bottom of door	1/2	12
M Width of handle	28 5/8	727
N Depth of handle	1 5/8	42
O Thickness of handle	5/8	16
P Depth of door when open (measured from front of door)	18 1/8	460
Minimum Clearances - Flush Installation	in	mm
Minimum inside height of cavity	22 13/16	580
Minimum inside width of cavity	28 1/2	724
Minimum inside depth of cavity*	22 7/16	570
Minimum clearance above oven control panel to upper cabinetry front panel or appliance	1/16	2
Minimum clearance between bottom of oven chassis to lower cabinetry front panel or appliance	1/16	2
*Measured from front of control panel		
Ensure a 3/16" (5mm) minimum clearance is maintained between the top of the oven chassis and the cabinetry. Ensure the oven is not bearing any weight from cabinetry or products installed above.		
IMPORTANT NOTE: For full installation and clearance details please refer to our installation manual.		
INDICATES PRODUCT DATUM -----		
INDICATES CABINETRY CLEARANCES - - - - -		
IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the Installation Guide for detailed information on installing the product. For full installation instructions visit fisherpaykel.com		

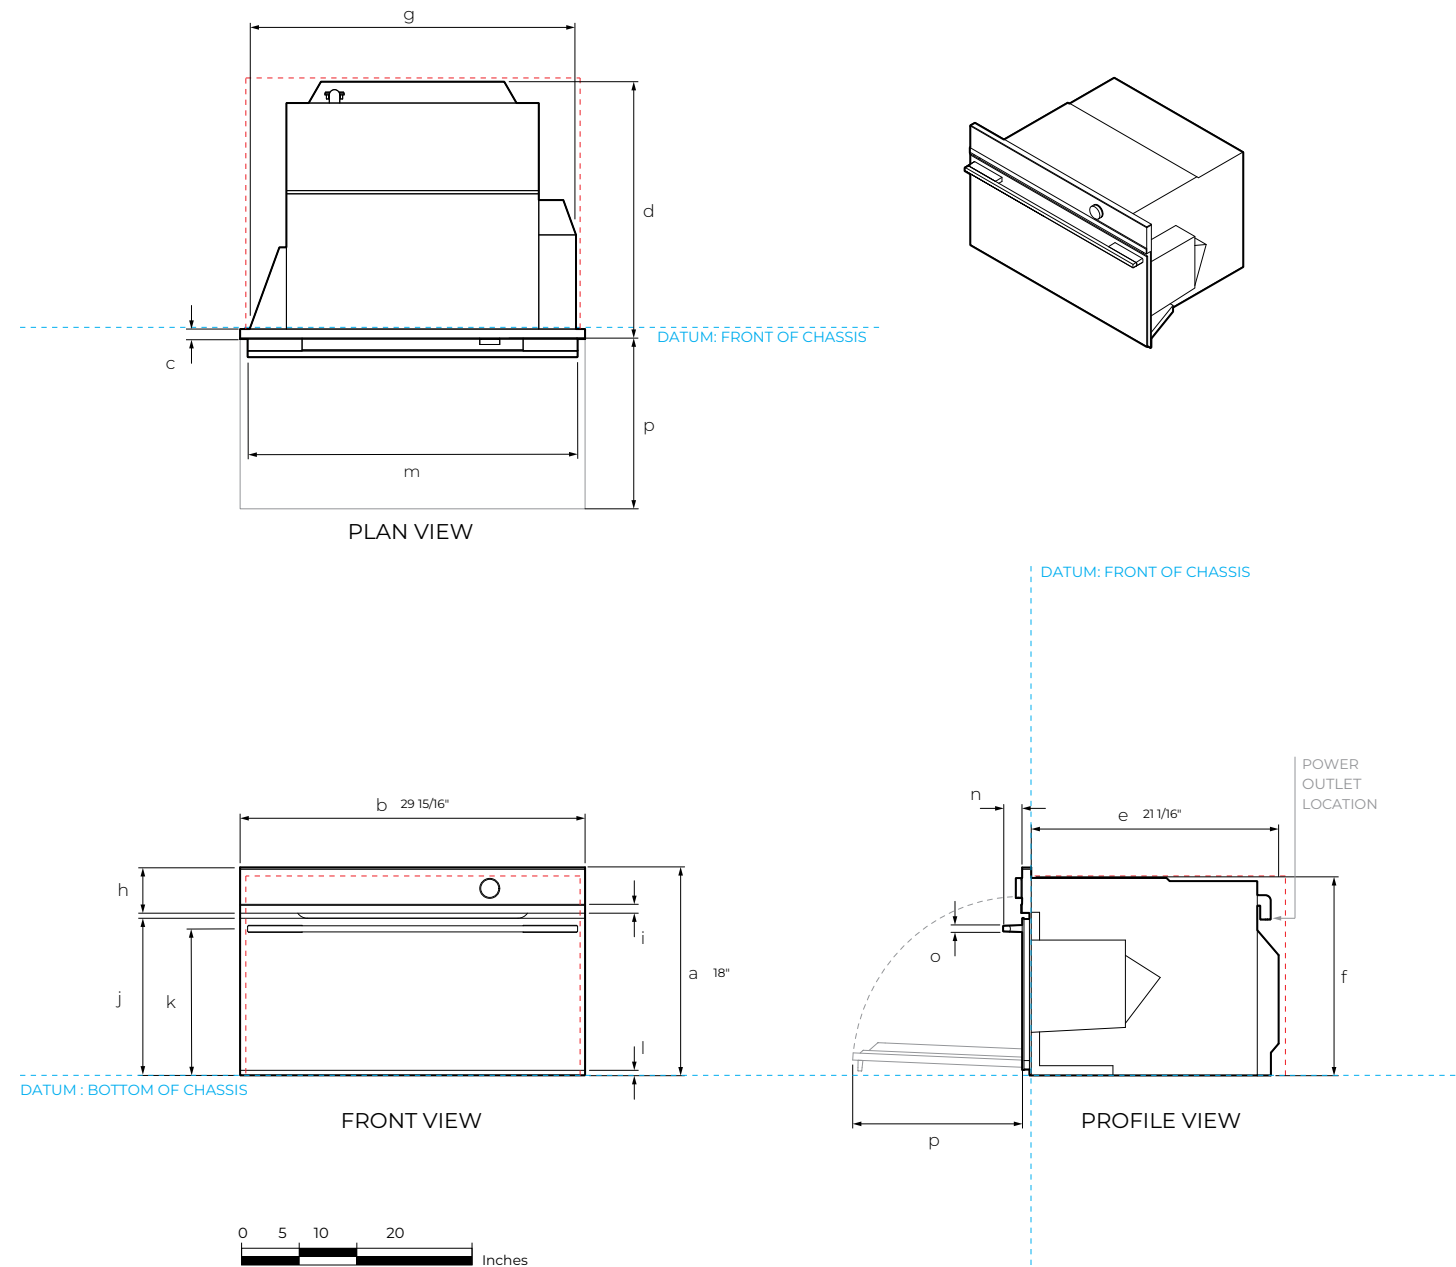

Model no:		
Combination Steam Oven, 30" - OS30NDTDX1, OS30NDLX1		
Product Dimensions	in	mm
A Overall height of product	18	458
B Overall width of product	29 15/16	760
C Depth of control panel (excludes handle, front black aluminum trim and dial)	13/16	20
D Depth of chassis and control panel (excludes handle, front black aluminum trim and dial)	22 1/4	565
E Depth of chassis	21 1/16	545
F Height of chassis	17 1/8	435
G Width of chassis	28 3/8	720
H Height of control panel	3 15/16	100
I Height of black aluminum trim on control panel	13/16	20
J Height from bottom datum to top of oven door	13 11/16	347
K Height from bottom datum to centerline of handle	12 3/4	324
L Height from bottom datum to bottom of door	1/2	12
M Width of handle	28 5/8	727
N Depth of handle	1 5/8	42
O Thickness of handle	5/8	16
P Depth of door when open (measured from front of door)	12 5/8	320
Minimum Clearances - Flush Installation	in	mm
Minimum inside height of cavity	17 5/16	440
Minimum inside width of cavity	28 1/2	724
Minimum inside depth of cavity*	22 7/16	570
Minimum clearance above oven control panel to upper cabinetry front panel or appliance	1/16	2
Minimum clearance between bottom of oven chassis to lower cabinetry front panel or appliance	1/16	2
*Measured from front of control panel Ensure a 3/16" (5mm) minimum clearance is maintained between the top of the oven chassis and the cabinetry. Ensure the oven is not bearing any weight from cabinetry or products installed above.		
IMPORTANT NOTE: For full installation and clearance details please refer to our installation manual.		
INDICATES PRODUCT DATUM -----		
INDICATES CABINETY CLEARANCES - - - - -		
IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the Installation Guide for detailed information on installing the product. For full installation instructions visit fisherpaykel.com		

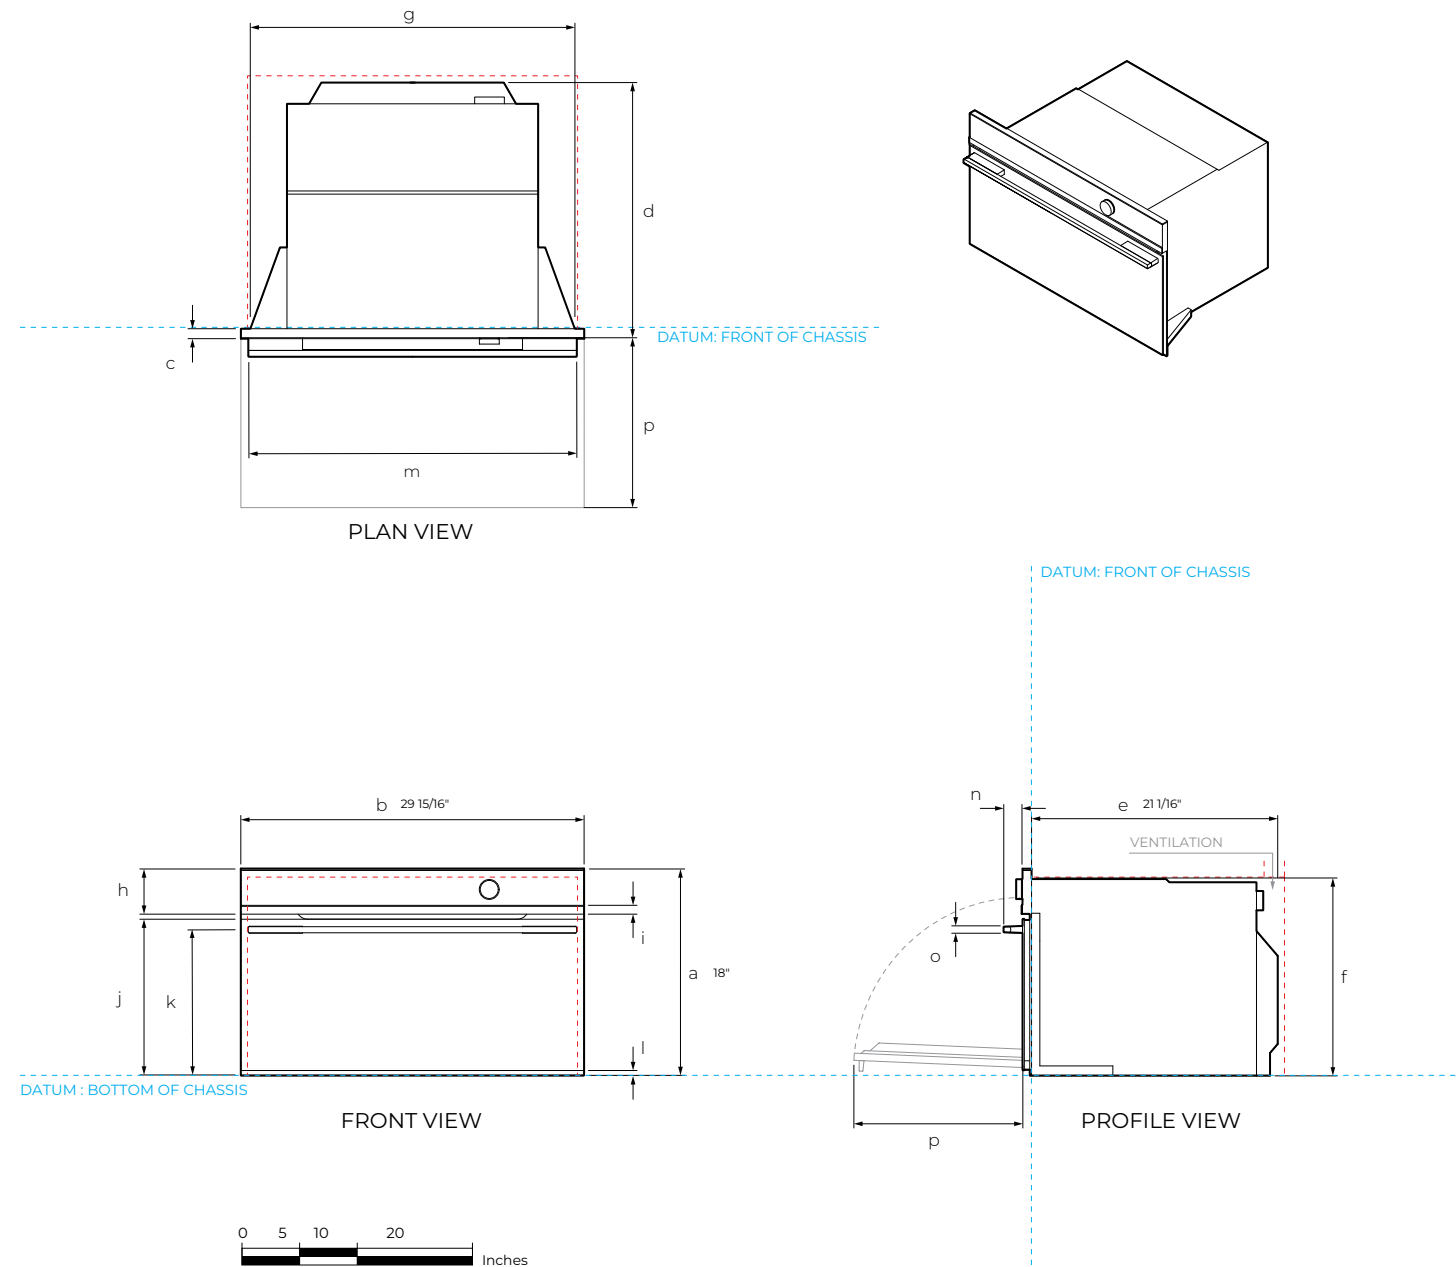

Model no:

Convection Speed Oven, 30" - OM30NDTDX1, OM30NDLX1

Product Dimensions	in	mm
A Overall height of product	18	458
B Overall width of product	29 15/16	760
C Depth of control panel (excludes handle, front black aluminum trim and dial)	13/16	20
D Depth of chassis and control panel (excludes handle, front black aluminum trim and dial)	22 1/4	565
E Depth of chassis	21 1/16	545
F Height of chassis	17 1/8	435
G Width of chassis	28 3/8	720
H Height of control panel	3 15/16	100
I Height of black aluminum trim on control panel	13/16	20
J Height from bottom datum to top of oven door	13 11/16	347
K Height from bottom datum to centerline of handle	12 3/4	324
L Height from bottom datum to bottom of door	1/2	12
M Width of handle	28 5/8	727
N Depth of handle	1 5/8	42
O Thickness of handle	5/8	16
P Depth of door when open (measured from front of door)	12 5/8	320

Minimum Clearances - Flush Installation	in	mm
Minimum inside height of cavity	17 5/16	440
Minimum inside width of cavity	28 1/2	724
Minimum inside depth of cavity*	22 7/16	570
Rear ventilation depth**	2	50
Rear ventilation width**	22 1/16	560
Minimum clearance above oven control panel to upper cabinetry front panel or appliance	1/16	2
Minimum clearance between bottom of oven chassis to lower cabinetry front panel or appliance	1/16	2


*Measured from front of control panel
**Rear ventilation totalling 43.4in2 (280cm2) is required. The air vent must be located at the rear of cabinet, it can be positioned at the base, sides, back or top of the cavity.

IMPORTANT NOTE: For full installation and clearance details please refer to our installation manual.

INDICATES PRODUCT DATUM

INDICATES CABINETRY CLEARANCES

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the Installation Guide for detailed information on installing the product. For full installation instructions visit [fisherpaykel.com](https://www.fisherpaykel.com)

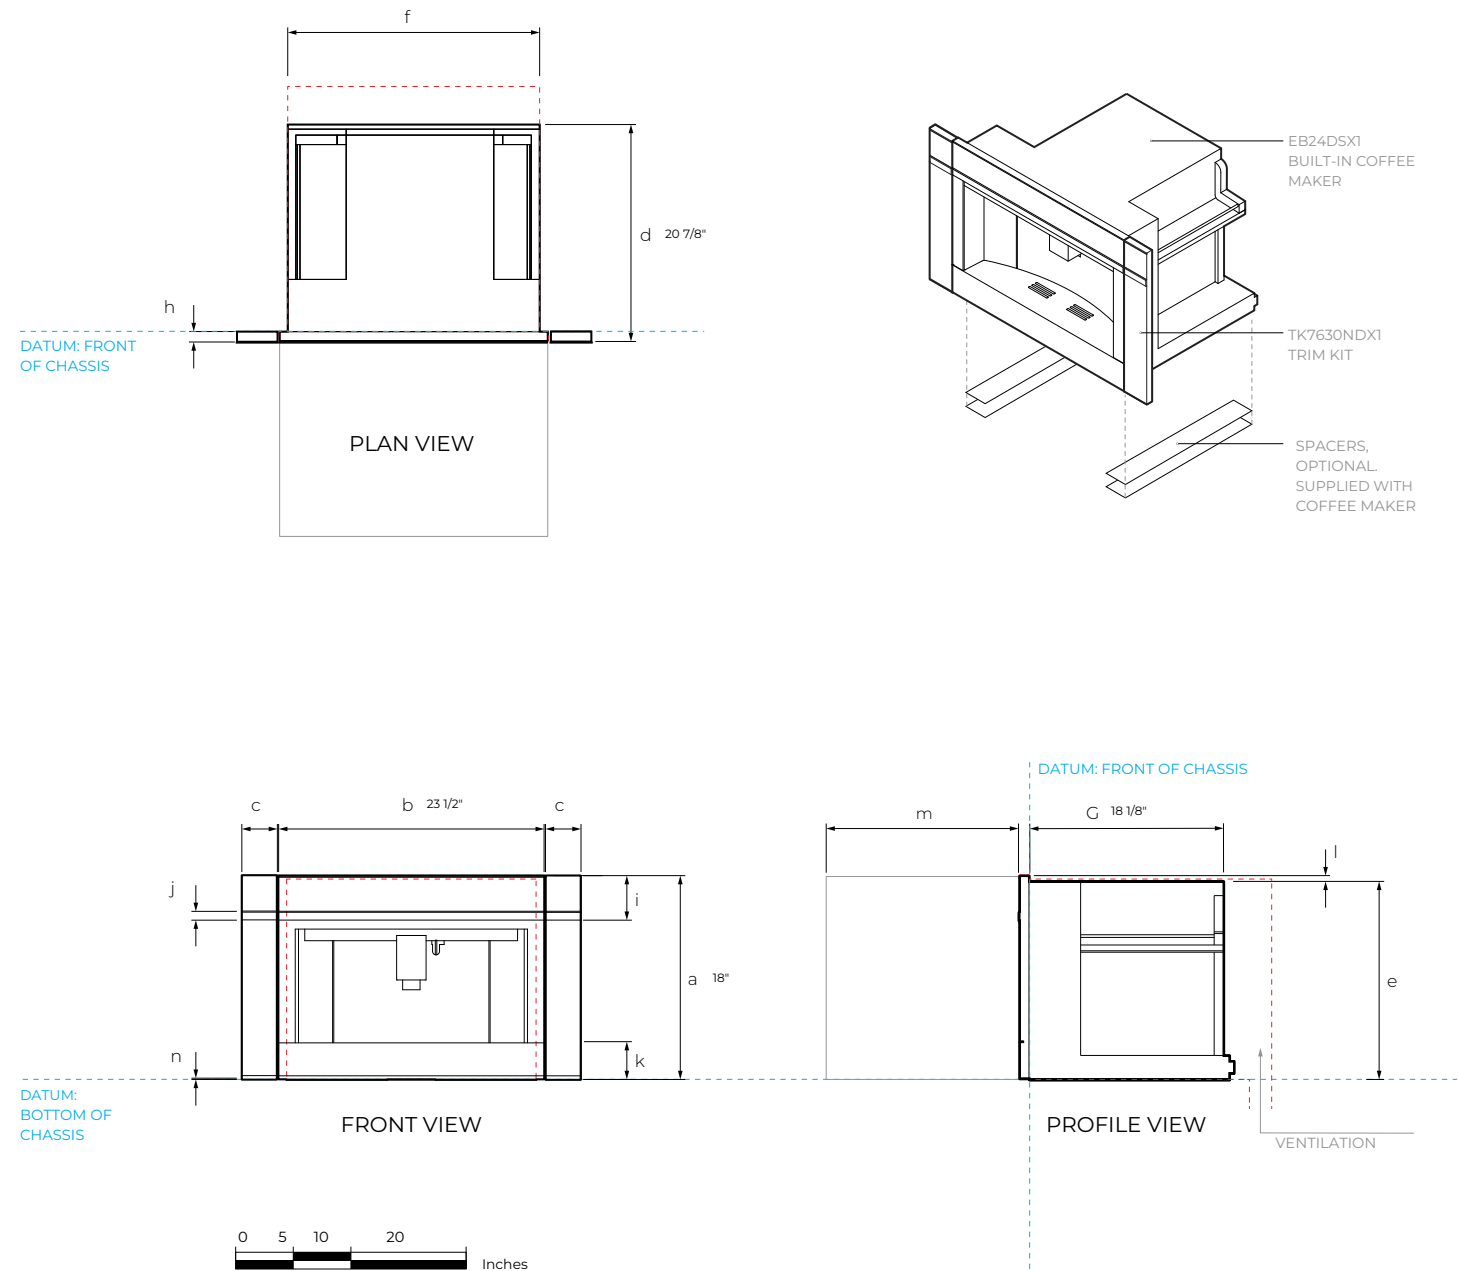

Model no:

Built-in Coffee Maker, 24" - EB24DSX1
Trim Kit, 30" - TK7630NDX1

Product Dimensions	in	mm
A Overall height of built-in coffee maker and trim kit	18	458
B Overall width of built-in coffee maker	23 1/2	596
C Overall width of trim kit	3 1/9	79
D Overall depth of built-in coffee maker and trim kit (excludes front metal trim)	18 7/8	480
E Height of chassis of built-in coffee maker	17 1/2	445
F Width of chassis of built-in coffee maker	22 1/16	560
G Depth of chassis of built-in coffee maker	18 1/8	460
H Depth of coffee maker front frame and control panel (excludes front metal trim)	13/16	20
I Height of control panel	3 15/16	100
J Height of metal cap on control panel	13/16	20
K Height of horizontal lower section from bottom datum	3 3/8	85
L Stepdown from control panel to chassis	1/2	13
M Extent built-in coffee maker pulls out (measured from glass front)	17 1/8	435
N Height from bottom datum to lower edge of glass	1/8	3


Minimum Clearances - Flush Installation	in	mm
Minimum inside height of cavity	17 3/4	450
Minimum inside width of cavity	22 1/16	560
Minimum inside depth of cavity*	22 13/16	580
Rear ventilation depth**	2	50
Rear ventilation width**	22 1/16	560
Minimum clearance above Trim Kit to upper cabinetry front panel or appliance	1/16	2
Minimum clearance between bottom of Trim Kit to lower cabinetry front panel or appliance	1/16	2

*Measured from front of control panel
**Rear ventilation totalling 43.4in2 (280cm2) is required. The air vent must be located at the rear of cabinet, it can be positioned at the base, sides, back or top of the cavity.


IMPORTANT NOTE: For full installation and clearance details please refer to our installation manual.

INDICATES PRODUCT DATUM
INDICATES CABINETRY CLEARANCES

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the Installation Guide for detailed information on installing the product. For full installation instructions visit fisherpaykel.com

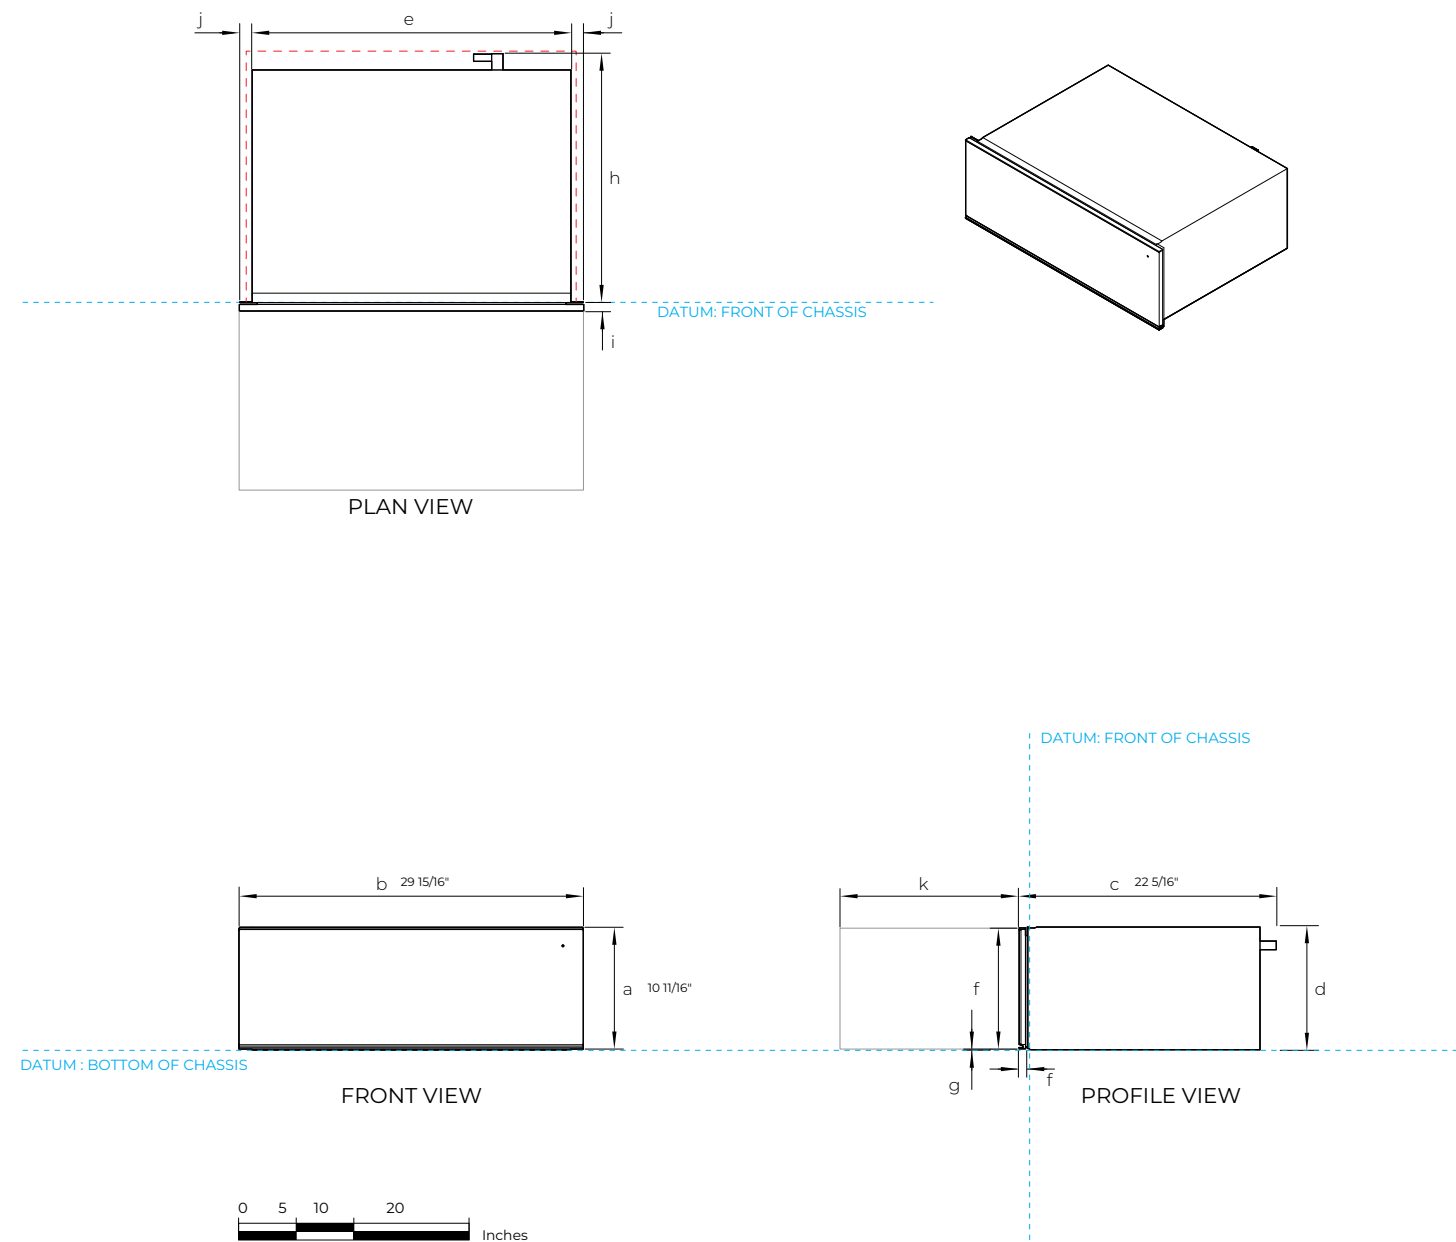

Model no:		
Warming Drawer, 30" - WB30SDX1-SET, WB30SDB1-SET		
Product Dimensions	in	mm
A Overall height of product	10 11/16	271
B Overall width of product	29 15/16	760
C Overall depth (incl. front panel & power plug, excludes stainless cap)	22 5/16	567
D Height of chassis	10 11/16	271
E Width of chassis	27 3/4	704
F Height of drawer front panel	10 1/2	267
G Height from bottom of chassis to bottom of front panel	1/16	2
H Depth of chassis (includes power plug)	21 9/16	547
I Depth of drawer front panel and flange (excludes stainless cap)	13/16	20
J Distance from side of chassis to side of drawer front	1 1/16	27
K Depth of open drawer (measured from front of drawer panel)	16 3/4	425
Minimum Clearances - Flush Installation	in	mm
Minimum inside height of cavity	10 3/4	273
Minimum inside width of cavity	28 1/2	724
Minimum inside depth of cavity*	22 13/16	580
Minimum clearance above drawer front panel to upper cabinetry front panel or appliance**	5/32	4
Minimum clearance between bottom of drawer chassis to lower cabinetry front panel or appliance	1/16	2
*Measured from front of drawer panel		
**Achieve a smaller gap between drawer front panel to upper cabinetry front panel by dropping cabinetry front panel down		
IMPORTANT NOTE: For full installation and clearance details please refer to our installation manual.		
INDICATES PRODUCT DATUM -----		
INDICATES CABINETRY CLEARANCES -----		
IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the Installation Guide for detailed information on installing the product. For full installation instructions visit fisherpaykel.com		

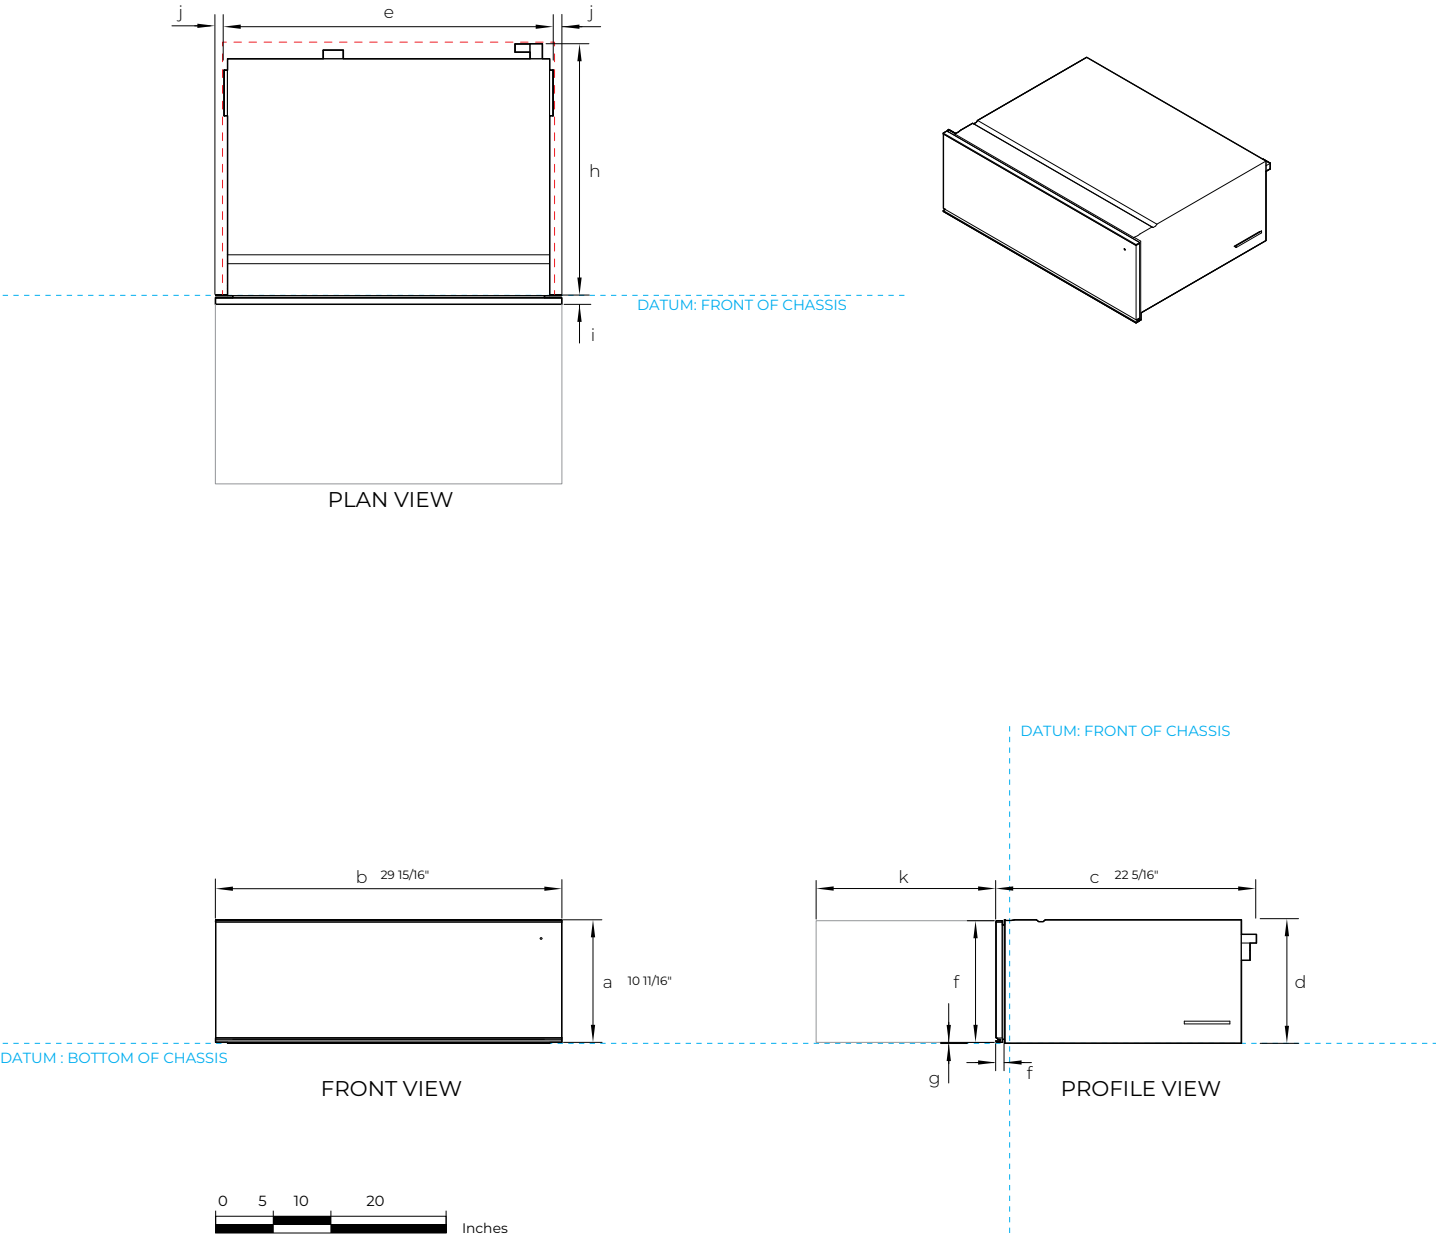

Model no:
Vacuum Seal Drawer, 30" - VB30SDX1-SET, VB30SDB1-SET

Product Dimensions	in	mm
A Overall height of product	10 11/16	271
B Overall width of product	29 15/16	760
C Overall depth (incl. front panel & power plug, excludes stainless cap)	22 1/2	571
D Height of chassis	10 11/16	271
E Width of chassis	28 7/16	722
F Height of drawer front panel	10 1/2	267
G Height from bottom of chassis to bottom of front panel	1/16	2
H Depth of chassis (includes power plug)	21 9/16	551
I Depth of drawer front panel and flange (excludes stainless cap)	13/16	20
J Distance from side of chassis to side of drawer front	3/4	19
K Depth of open drawer (measured from front of drawer panel)	16 3/4	425

Minimum Clearances - Flush Installation	in	mm
Minimum inside height of cavity	10 3/4	273
Minimum inside width of cavity	28 1/2	724
Minimum inside depth of cavity*	22 13/16	580
Minimum clearance above drawer front panel to upper cabinetry front panel or appliance**	5/32	4
Minimum clearance between bottom of drawer chassis to lower cabinetry front panel or appliance	1/16	2

*Measured from front of drawer panel
**Achieve a smaller gap between drawer front panel to upper cabinetry front panel by dropping cabinetry front panel down

IMPORTANT NOTE: For full installation and clearance details please refer to our installation manual.

INDICATES PRODUCT DATUM
INDICATES CABINETRY CLEARANCES

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the Installation Guide for detailed information on installing the product. For full installation instructions visit fisherpaykel.com

PLANNING CONSIDERATIONS

DIVIDING SHELF

If the appliance front panel is thicker than the cabinetry front panel, adjust the dividing shelf depth to ensure the oven sits flush with the front of the cabinetry.

BLACK CLASHING



Black clashing is recommended on front facing edges where products are located and on side cabinets if cabinet is rebated.

OVEN CABINETRY TRIM

If using light-colored cabinets, we recommend using black cabinetry trim to help hide the cabinetry beneath the front door panel of the appliance. Ensure the trim height does not interfere with any appliances or cabinetry below. Black cabinetry trim is included with ovens.

LEVEL CABINETRY


Check the shelves are level and the side panels are straight.

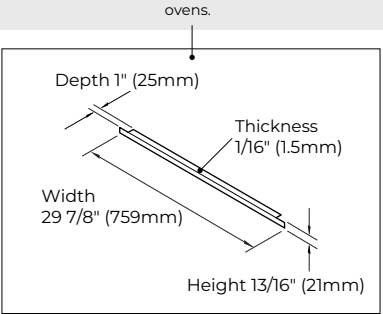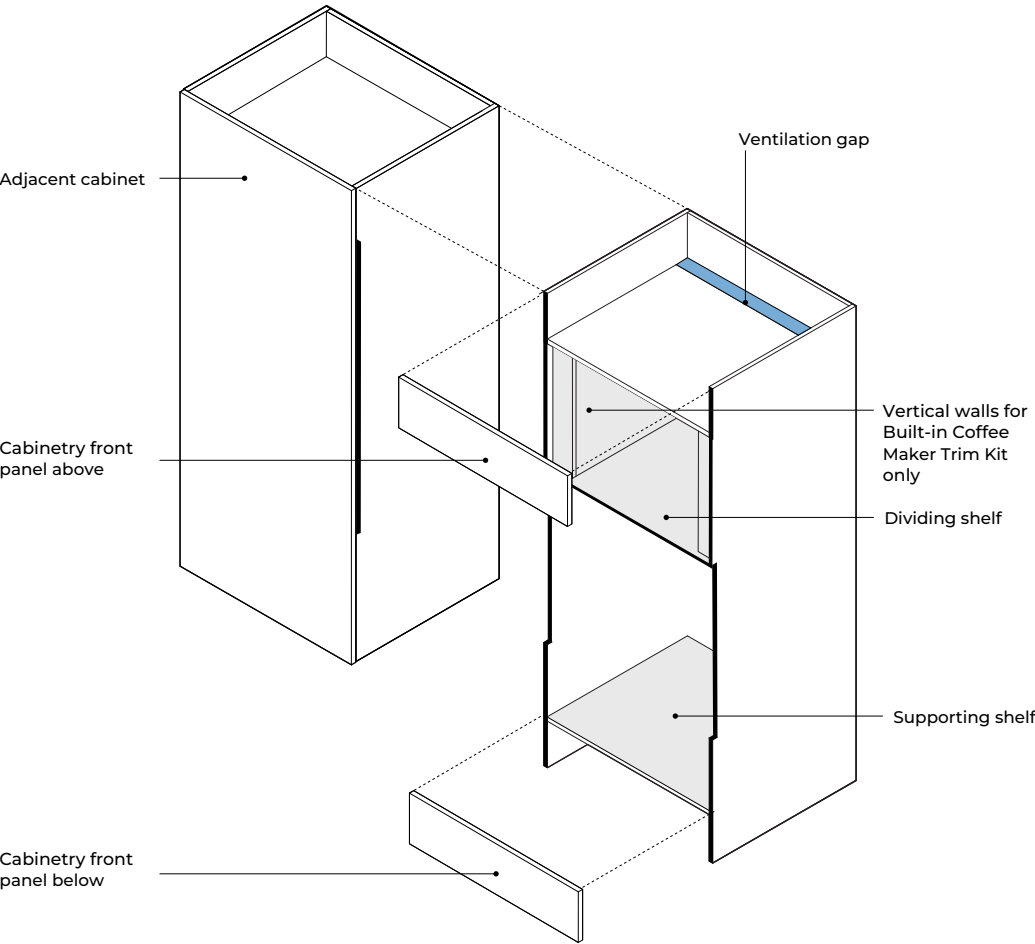

Combination Steam Oven or Convection Speed Oven or Built-in Coffee Maker

Oven or Combination Steam Oven

Warming Drawer or Vacuum Seal Drawer

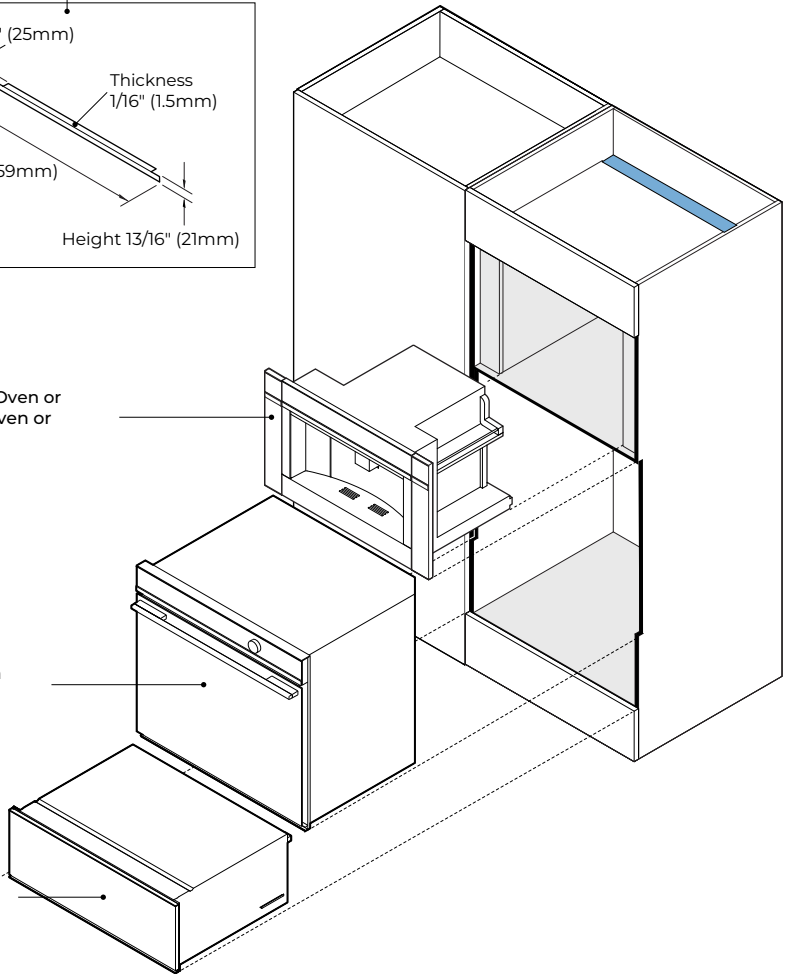

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available on our website fisherpaykel.com



Ventilation air vent is required at rear for some products.

Dividing shelves are required to support stacked appliances and to achieve correct clearance.


Dividing shelves must be constructed from material that will support the weight of the appliances.

Ensure the oven is not bearing any weight from cabinetry or products installed above.

Warming Drawers and Vacuum Seal Drawers can fully support a 30inch Fisher & Paykel oven, without adding a shelf in between.

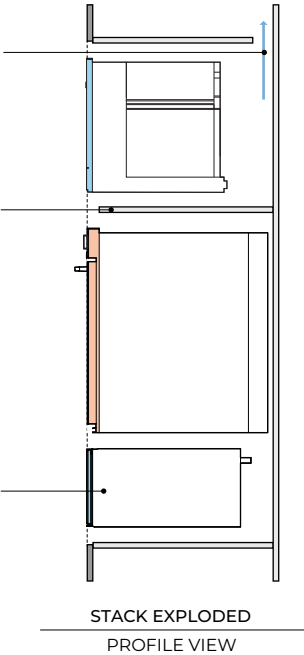

Minimum clearance above appliance control panel to upper appliance

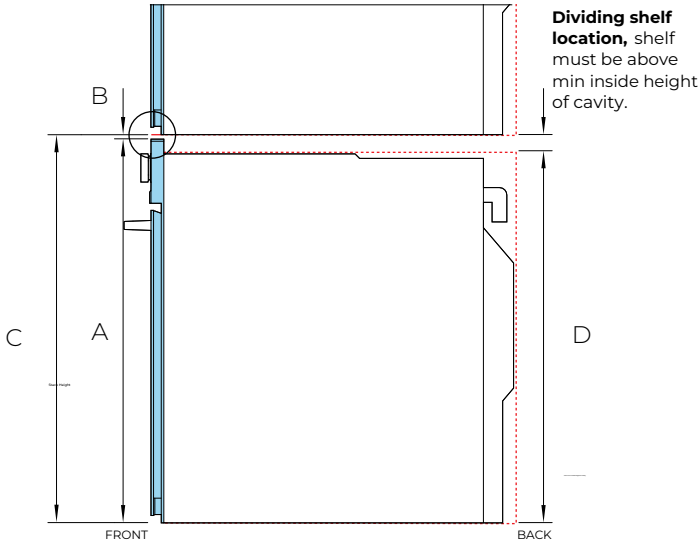

Dividing shelf location, shelf must be above min inside height of cavity.

MINIMUM DIMENSION CLEARANCES

VACUUM SEAL DRAWER
VB30SDX1-SET
VB30SDB1-SET

WARMING DRAWER
WB30SDX1-SET
WB30SDB1-SET

BUILT-IN COFFEE MAKER
EB24DSX1
Trim Kit TK7630NDX1

CONVECTION SPEED OVEN
OM30NDTDX1
OM30NDLX1

COMBINATION STEAM OVEN
OS30NDTDX1
OS30NDLX1

COMBINATION STEAM OVEN
OS30SDTDX1
OS30SDLX1

OVEN
OB30SDPTDX2
OB30SDI7PLX1
OB30SDI14PLX1

DOUBLE OVEN
OB30DDPTDX2

DIMENSIONS




A Overall product height	10 11/16" (271mm)	10 11/16" (271mm)	18" (458mm)**	18" (458mm)	18" (458mm)	23 9/16" (598mm)	27 3/16" (690mm)	48 1/2" (1232mm)
B Minimum clearance above	-	-	-	1/16" (2mm)	1/16" (2mm)	1/16" (2mm)	1/16" (2mm)	1/16" (2mm)
C Stack height	10 11/16" (271mm) *	10 11/16" (271mm) *	18 1/8" (460mm)	18 1/8" (460mm)	18 1/8" (460mm)	23 5/8" (600mm)	27 1/4" (692mm)	48 9/16" (1234mm)
D Minimum inside height of cavity	10 11/16" (271mm)	10 11/16" (271mm)	17 5/16" (440mm)	17 5/16" (440mm)	17 5/16" (440mm)	22 13/16" (580mm)	26 13/16" (681mm)	48 3/16" (1224mm)

* Drawers can fully support 30inch Fisher & Paykel wall oven, without adding shelf in between

** Includes Built-in Coffee Maker rail height

NOTE: Stack height is overall product height with minimum clearance above appliance control panel or front panel to upper appliance.

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available on our website fisherpaykel.com

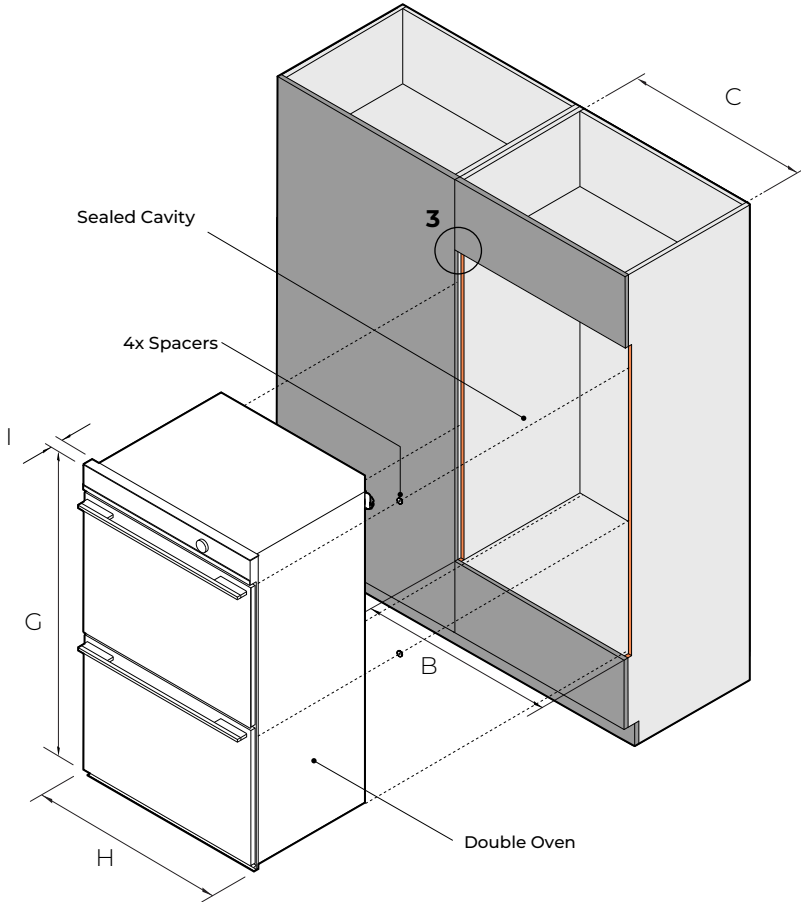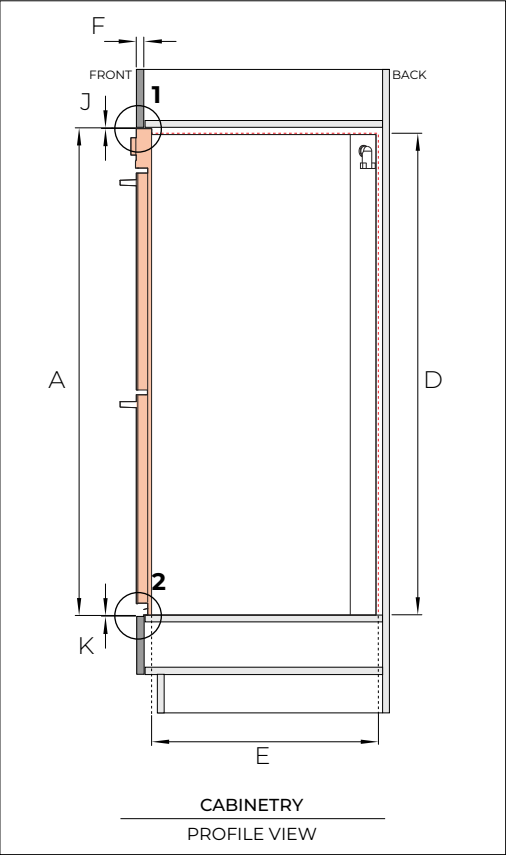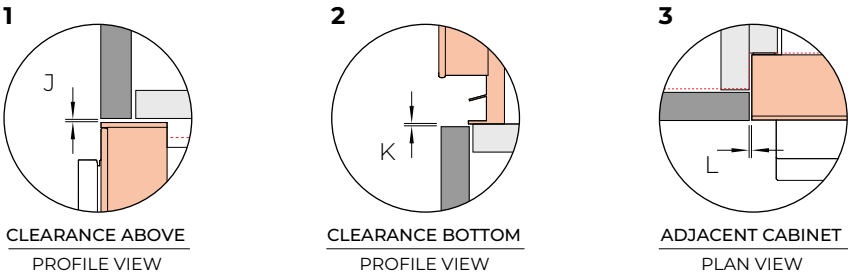

Model no:
Double Oven, 30" - OB30DDPTDX2

Cabinetry Dimensions - Flush Installation		inch	mm
A	Overall cabinet height*	48 9/16	1234
B	Overall cabinet width - single installation	30 1/16	764
C	Minimum inside width of cavity	28 1/2	724
D	Minimum inside height of cavity	48 3/16	1224
E	Minimum inside depth of cavity	22 5/8	575
F	Thickness of cabinetry front panel**	5/8-13/16	16-20

*Overall cabinet height is overall product height with minimum clearance above oven control panel to upper cabinetry front panel.
**Cabinetry shown in drawings 3/4" (19mm) panels.

Note: Oven requires 1/16" (2mm) spacers for screws (supplied x 4).

Product Dimensions		inch	mm
G	Overall height of product	48 1/2	1232
H	Overall width of product	29 15/16	760
I	Thickness of oven control panel*	1 9/16	40




*If the oven control panel is thicker than 3/4" (20mm), adjust the panel above and below to ensure the oven sits flush with the front of the cabinetry.

Cabinetry Clearances		inch	mm
J	Minimum clearance above oven control panel to upper cabinetry front panel	1/16	2
K	Minimum clearance between bottom of oven chassis to lower cabinetry front panel	1/16	2
L	Minimum clearance between adjacent front panel or appliance	1/16	2

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available on our website fisherpaykel.com

COOKTOP CLEARANCE

If installing a cooktop above the oven, ensure adequate clearance is provided for the cooktop as per the cooktop manufacturer's instructions.

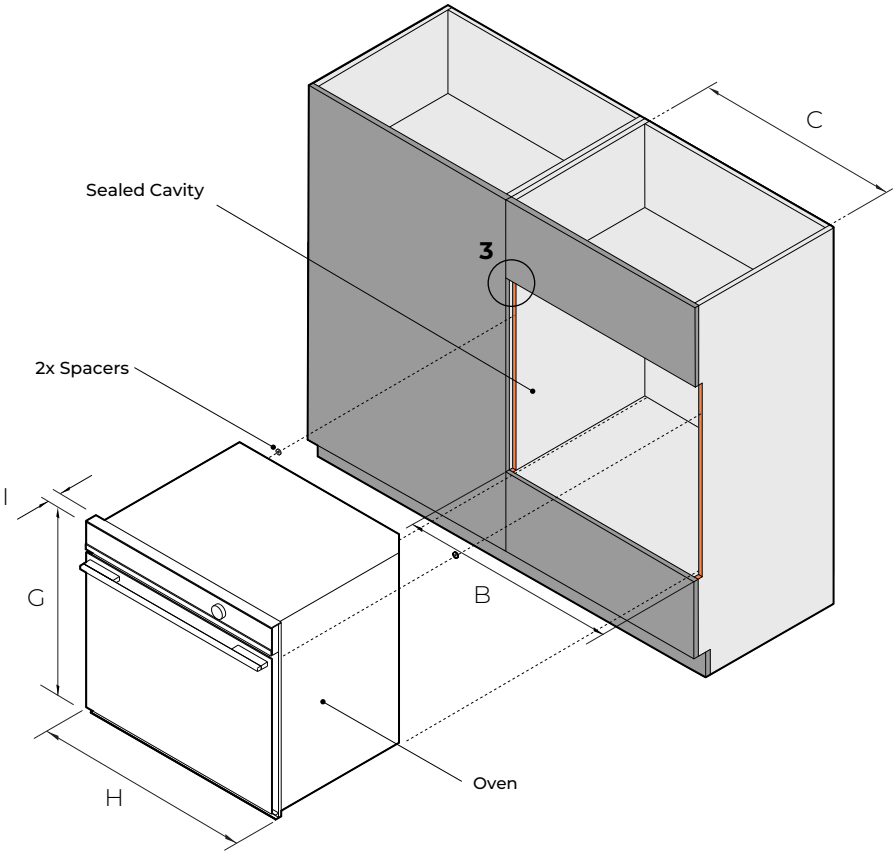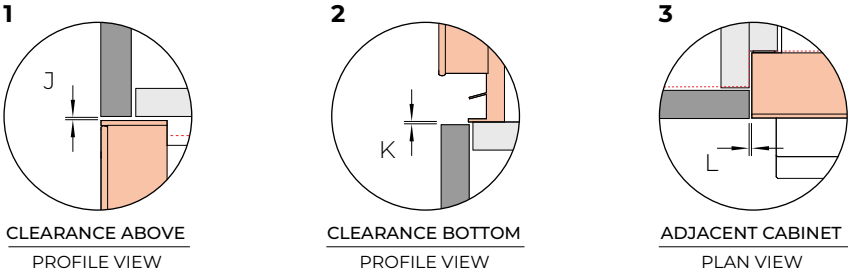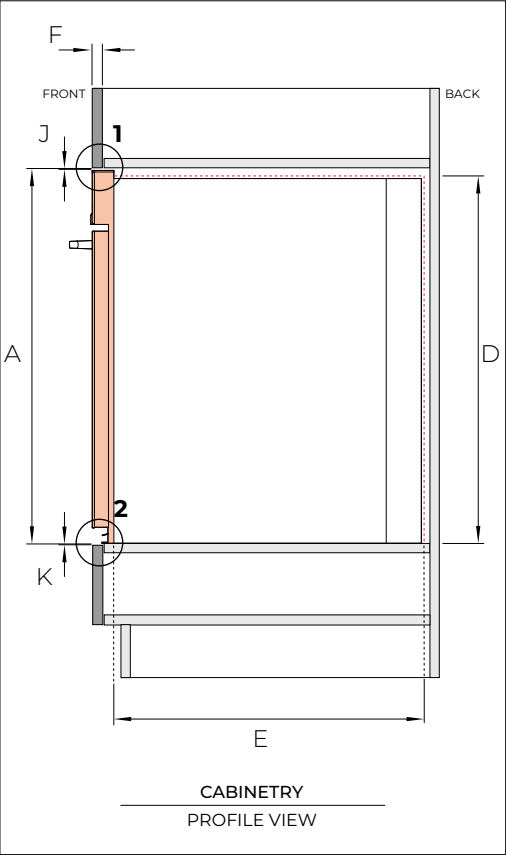

Model no:
Oven, 30" - OB30SDPTDX2, OB30SD14PLX1

Cabinetry Dimensions - Flush Installation		inch	mm
A	Overall cabinet height*	27 1/4	692
B	Overall cabinet width - single installation	30 1/16	764
C	Minimum inside width of cavity	28 1/2	724
D	Minimum inside height of cavity	26 13/16	681
E	Minimum inside depth of cavity	22 5/8	575
F	Thickness of cabinetry front panel**	5/8-13/16	16-20

*Overall cabinet height is overall product height with minimum clearance above oven control panel to upper cabinetry front panel.
**Cabinetry shown in drawings 3/4" (19mm) panels.

Note: Oven requires 1/16" (2mm) spacers for screws (supplied x 2).

Product Dimensions		inch	mm
G	Overall height of product	27 3/16	690
H	Overall width of product	29 15/16	760
I	Thickness of oven control panel*	1 9/16	40


*If the oven control panel is thicker than 3/4" (20mm), adjust the panel above and below to ensure the oven sits flush with the front of the cabinetry.

Cabinetry Clearances		inch	mm
J	Minimum clearance above oven control panel to upper cabinetry front panel	1/16	2
K	Minimum clearance between bottom of oven chassis to lower cabinetry front panel	1/16	2
L	Minimum clearance between adjacent front panel or appliance	1/16	2


The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available on our website fisherpaykel.com

COOKTOP CLEARANCE


If installing a cooktop above the oven, ensure adequate clearance is provided for the cooktop as per the cooktop manufacturer's instructions.





CLEARANCE ABOVE
PROFILE VIEW



CLEARANCE BOTTOM
PROFILE VIEW



ADJACENT CABINET
PLAN VIEW

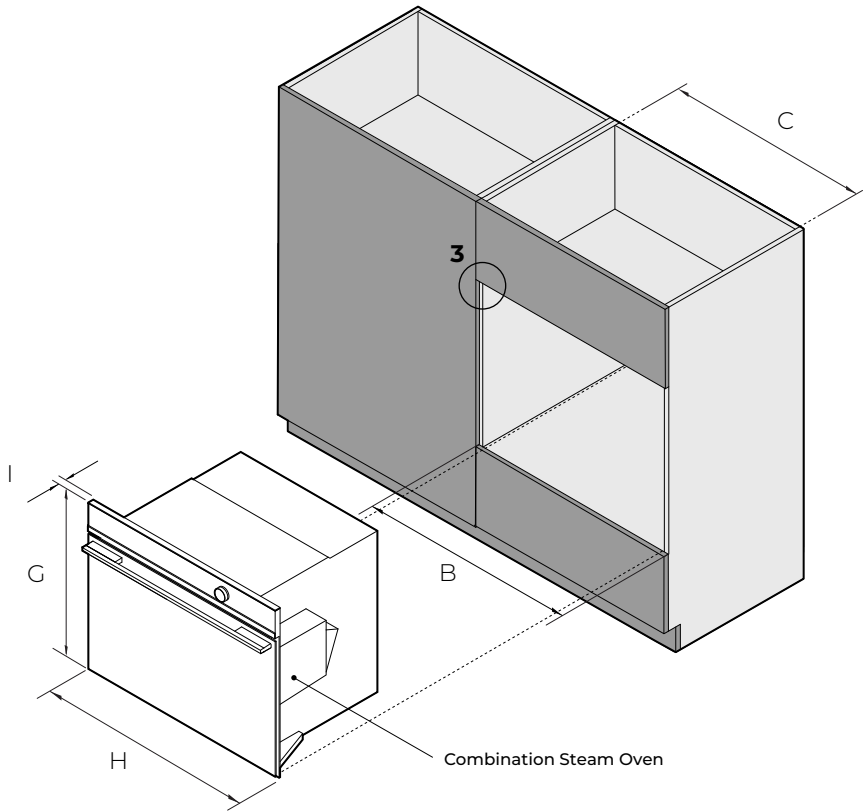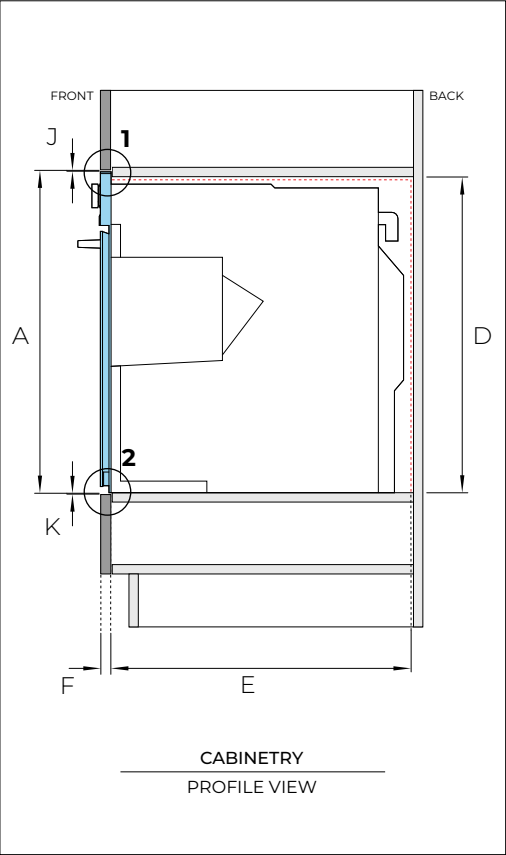

Model no:

Combination Steam Oven, 30" - OS30SDTDX1, OS30SDLX1

Cabinetry Dimensions - Flush Installation		inch	mm
A	Overall cabinet height*	23 5/8	600
B	Overall cabinet width - single installation	30 1/16	764
C	Minimum inside width of cavity	28 1/2	724
D	Minimum inside height of cavity	22 13/16	580
E	Minimum inside depth of cavity	21 5/8	550
F	Thickness of cabinetry front panel**	5/8-13/16	16-20

*Overall cabinet height is overall product height with minimum clearance above oven control panel to upper cabinetry front panel.
**Cabinetry shown in drawings 3/4" (19mm) panels.

Note: Consider placement of shelf above minimum inside height of cavity.


Product Dimensions		inch	mm
G	Overall height of product	23 9/16	598
H	Overall width of product	29 15/16	760
I	Thickness of oven front panel	13/16	20

Cabinetry Clearances		inch	mm
J	Minimum clearance above oven control panel to upper cabinetry front panel	1/16	2
K	Minimum clearance between bottom of oven chassis to lower cabinetry front panel	1/16	2
L	Minimum clearance between adjacent front panel or appliance	1/16	2


The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available on our website fisherpaykel.com

COOKTOP CLEARANCE


If installing a cooktop above the oven, ensure adequate clearance is provided for the cooktop as per the cooktop manufacturer's instructions.




CLEARANCE ABOVE
PROFILE VIEW




CLEARANCE BOTTOM
PROFILE VIEW



ADJACENT CABINET
PLAN VIEW

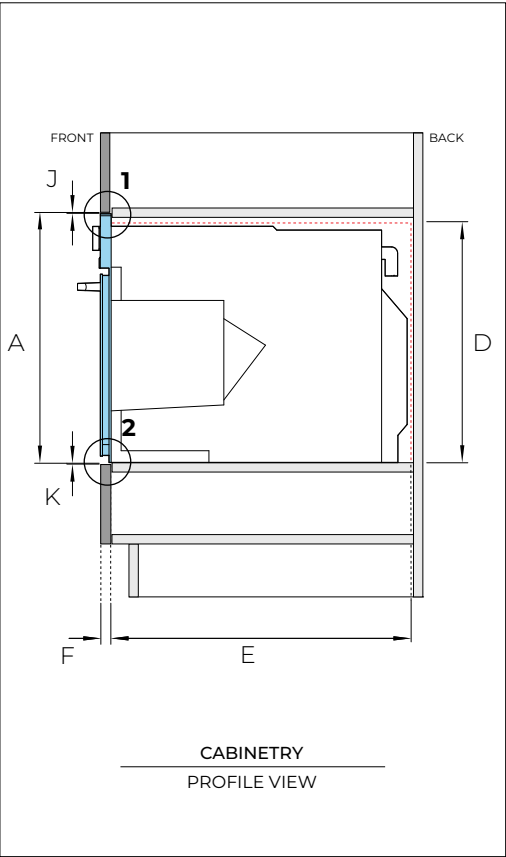

CABINETRY
PROFILE VIEW

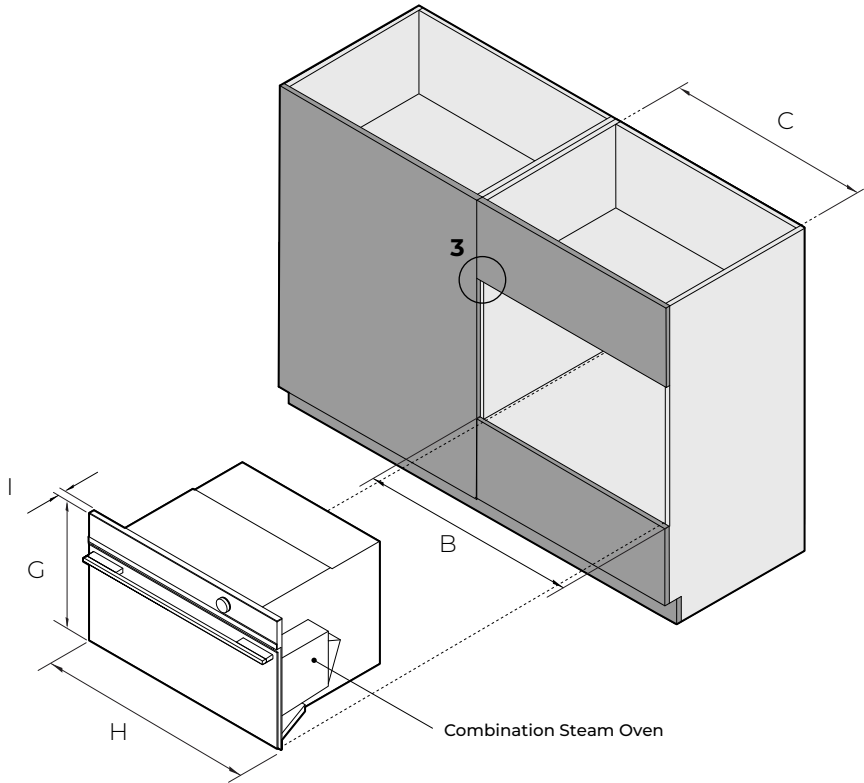

Combination Steam Oven

Model no:
Combination Steam Oven, 30" - OS30NDTDX1, OS30NDLX1

Cabinetry Dimensions - Flush Installation		inch	mm
A	Overall cabinet height*	18 1/8	460
B	Overall cabinet width - single installation	30 1/16	764
C	Minimum inside width of cavity	28 1/2	724
D	Minimum inside height of cavity	17 5/16	440
E	Minimum inside depth of cavity	21 5/8	550
F	Thickness of cabinetry front panel**	5/8-13/16	16-20

*Overall cabinet height is overall product height with minimum clearance above oven control panel to upper cabinetry front panel.
**Cabinetry shown in drawings 3/4" (19mm) panels.

Note: Consider placement of shelf above minimum inside height of cavity.


Product Dimensions		inch	mm
G	Overall height of product	18	458
H	Overall width of product	29 15/16	760
I	Thickness of oven front panel	13/16	20

Cabinetry Clearances		inch	mm
J	Minimum clearance above oven control panel to upper cabinetry front panel	1/16	2
K	Minimum clearance between bottom of oven chassis to lower cabinetry front panel	1/16	2
L	Minimum clearance between adjacent front panel or appliance	1/16	2


The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available on our website fisherpaykel.com

VENTILATION


Ventilation of 2" x 22 1/16" (50mm x 560mm) or totalling 43.4in² (280cm²) is required. The air vent must be located at the rear of cabinet, it can be positioned at the base, top, sides, or back.





CLEARANCE ABOVE
PROFILE VIEW



CLEARANCE BOTTOM
PROFILE VIEW



ADJACENT CABINET
PLAN VIEW

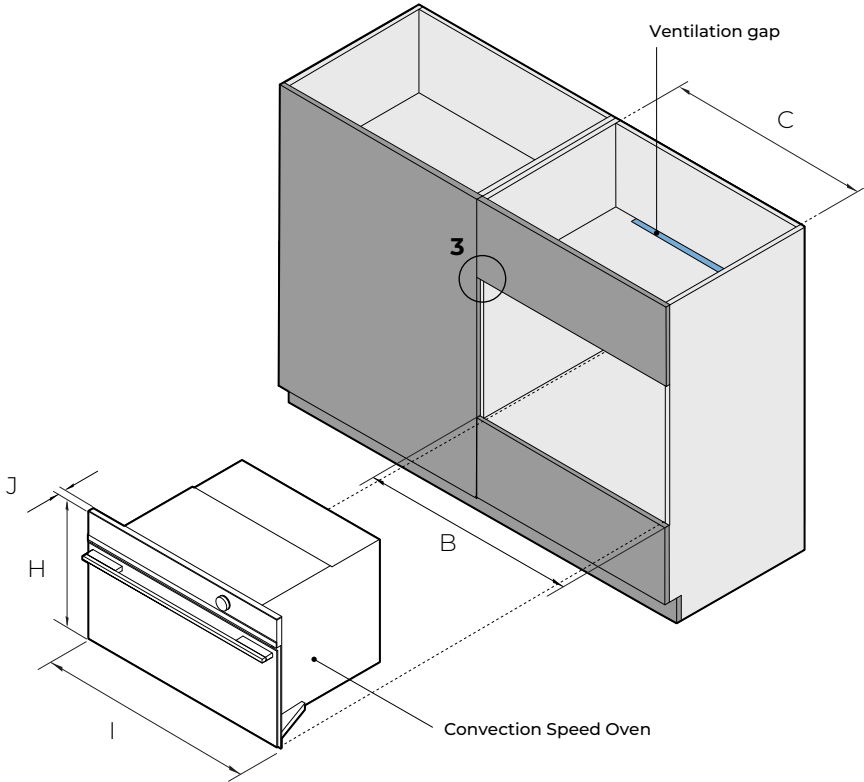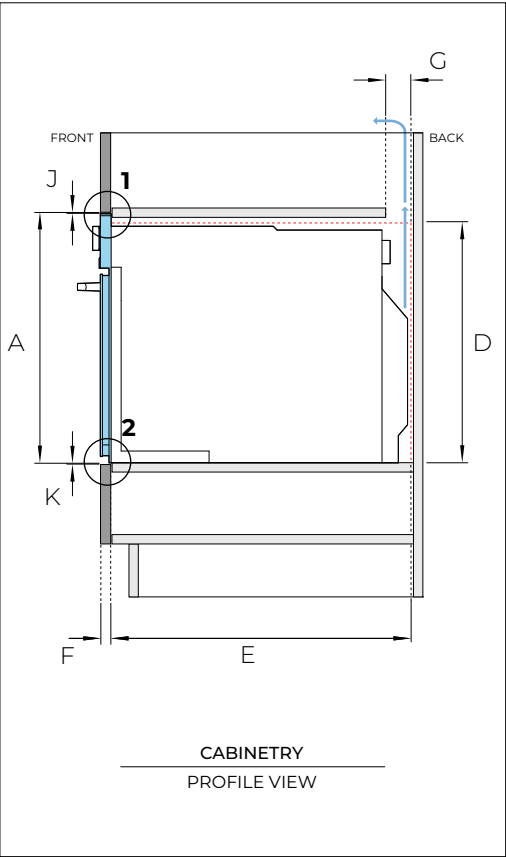

Model no:
Convection Speed Oven, 30" - OM30NDTDX1, OM30NDLX1

Cabinetry Dimensions - Flush Installation	inch	mm
A Overall cabinet height*	18 1/8	460
B Overall cabinet width - single installation	30 1/16	764
C Minimum inside width of cavity	28 1/2	724
D Minimum inside height of cavity	17 5/16	440
E Minimum inside depth of cavity	21 5/8	550
F Thickness of cabinetry front panel**	5/8-13/16	16-20
G Ventilation gap***	2	50

*Overall cabinet height is overall product height with minimum clearance above oven control panel to upper cabinetry front panel
**Cabinetry shown in drawings 3/4" (19mm) panels.
***A rear ventilation air vent totalling 43.4in² (280cm²) is required. The air vent must be located at the rear of the cabinet, it can be positioned at the base, sides, back or top of the cavity.

Note: Consider placement of shelf above minimum inside height of cavity.


Product Dimensions	inch	mm
H Overall height of product	18	458
I Overall width of product	29 15/16	760
J Thickness of oven front panel	13/16	20

Cabinetry Clearances	inch	mm
K Minimum clearance above oven control panel to upper cabinetry front panel	1/16	2
L Minimum clearance between bottom of oven chassis to lower cabinetry front panel	1/16	2
M Minimum clearance between adjacent front panel or appliance	1/16	2


The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available on our website fisherpaykel.com

VENTILATION


Ventilation of 2" x 22 1/16" (50mm x 560mm) or totalling 43.4in2 (280cm²) is required. The air vent must be located at the rear of cabinet, it can be positioned at the base, top, sides, or back.





CLEARANCE ABOVE
PROFILE VIEW



CLEARANCE BOTTOM
PROFILE VIEW



ADJACENT CABINET
PLAN VIEW

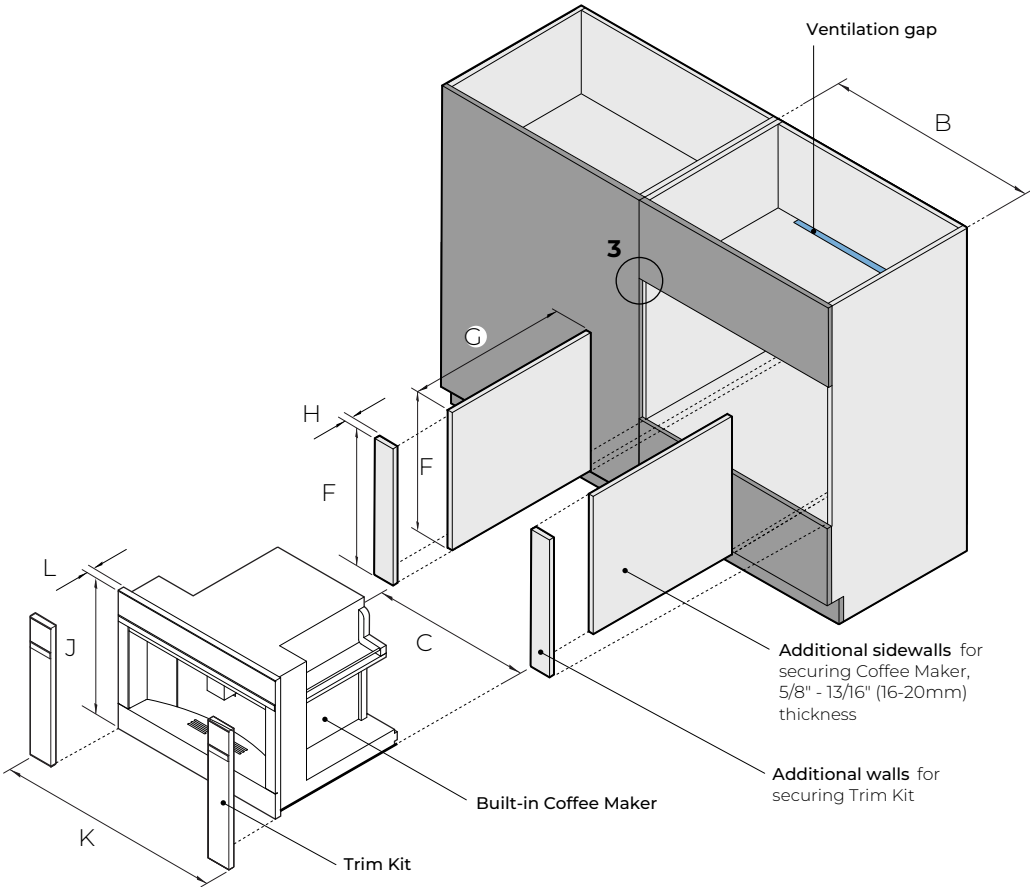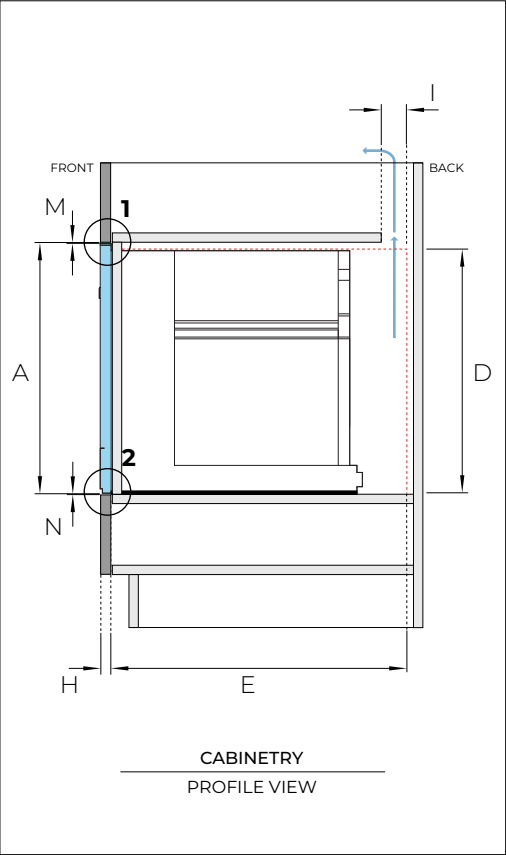

Model no:

Built-in Coffee Maker, 24" - EB24DSX1
Trim Kit, 30" - TK7630NDX1

Cabinetry Dimensions - Flush Installation		inch	mm
A	Overall cabinet height with trim kit*	18 1/8	460
B	Overall cabinet width - single installation	30 1/16	764
C	Minimum inside width of cavity	22 1/16	560
D	Minimum inside height of cavity	17 3/4	450
E	Minimum inside depth of cavity	22 13/16	580
F	Minimum height of additional side walls	17 3/4	450
G	Minimum depth of additional side walls**	22 1/16	561
H	Thickness of cabinetry front panel**	5/8-13/16	16-20
I	Ventilation gap***	2	50

*Overall cabinet height is overall product height with minimum clearance above coffee maker control panel to upper cabinetry front panel
**Cabinetry shown in drawings 3/4" (19mm) panels.
***A rear ventilation air vent totalling 43.4in² (280cm²) is required. The air vent must be located at the rear of the cabinet, it can be positioned at the base, sides, back or top of the cavity.

Note: Consider placement of shelf above minimum inside height of cavity.


Product Dimensions		inch	mm
J	Overall height of built-in coffee maker and trim kit	18	458
K	Overall width of built-in coffee maker and trim kit	29 15/16	760
L	Thickness of built-in coffee maker and trim kit front panel	13/16	20

Cabinetry Clearances		inch	mm
M	Minimum clearance above trim kit front panel to upper cabinetry front panel	1/16	2
N	Minimum clearance between bottom of trim kit to lower cabinetry front panel	1/16	2
O	Minimum clearance between adjacent front panel or appliance	1/16	2


The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available on our website fisherpaykel.com

NOTE


The Warming Drawer can fully support a 30inch Fisher & Paykel oven, without adding a shelf in between.




CLEARANCE ABOVE
PROFILE VIEW




CLEARANCE BOTTOM
PROFILE VIEW



ADJACENT CABINET
PLAN VIEW

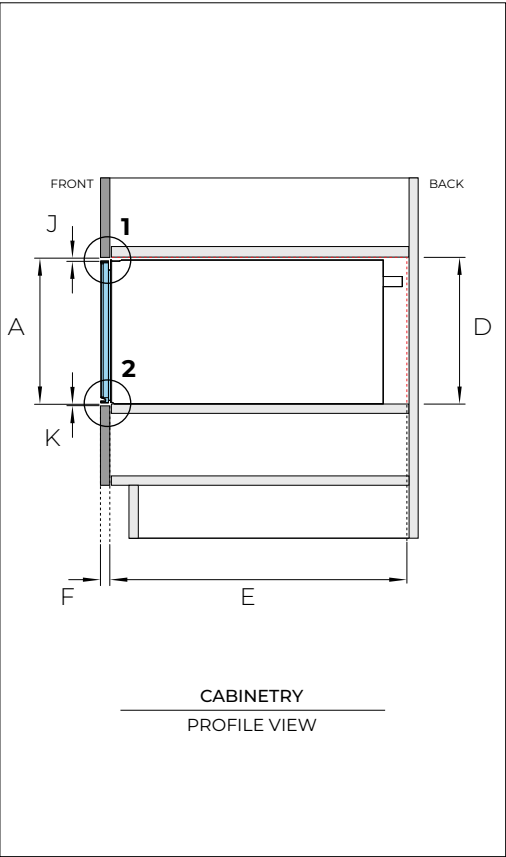

CABINETRY
PROFILE VIEW

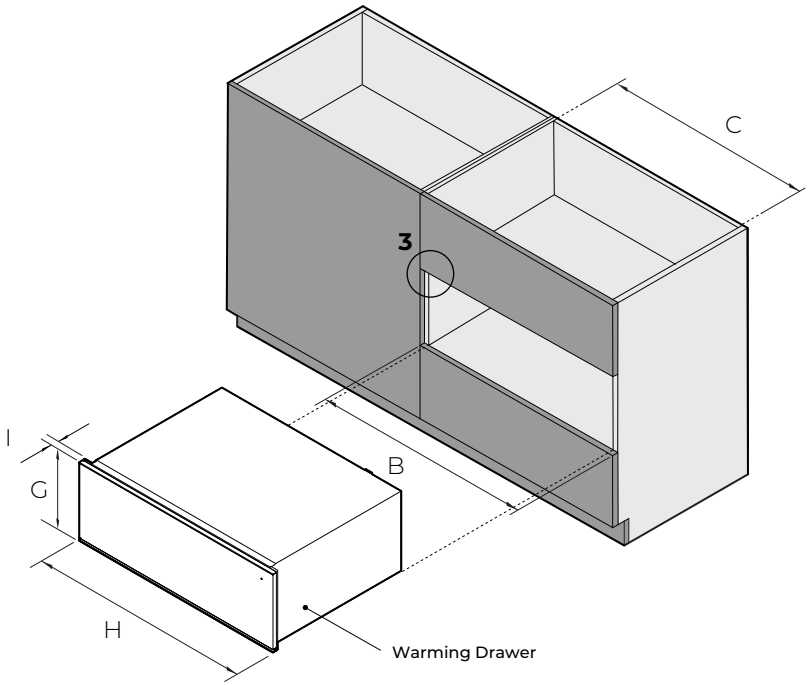

Warming Drawer

Model no:

Warming Drawer, 30" - WB30SDX1-SET, WB30SDB1-SET

Cabinetry Dimensions - Flush Installation		inch	mm
A	Overall cabinet height*	10 13/16	275
B	Overall cabinet width - single installation	30 1/16	764
C	Minimum inside width of cavity	28 1/2	724
D	Minimum inside height of cavity	10 3/4	273
E	Minimum inside depth of cavity	22 13/16	580
F	Thickness of cabinetry front panel**	5/8-13/16	16-20

*Overall cabinet height is overall product height with minimum clearance above drawer front panel to upper cabinetry front panel.

**Cabinetry shown in drawings 3/4" (19mm) panels.

Note: Consider placement of shelf above minimum inside height of cavity.

Product Dimensions		inch	mm
G	Overall height of product	10 11/16	271
H	Overall width of product	29 15/16	760
I	Thickness of warming drawer front panel and flange	13/16	20


Cabinetry Clearances		inch	mm
J	Minimum clearance above drawer front panel to upper cabinetry front panel*	5/32	4
K	Minimum clearance between bottom of drawer chassis to lower cabinetry front panel	1/16	2
L	Minimum clearance between adjacent front panel or appliance	1/16	2

*Achieve a smaller gap between drawer front panel to upper cabinetry front panel by dropping cabinetry front panel down


The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available on our website fisherpaykel.com

NOTE


The Vacuum Seal Drawer can fully support a 30inch Fisher & Paykel oven, without adding a shelf in between.




CLEARANCE ABOVE
PROFILE VIEW




CLEARANCE BOTTOM
PROFILE VIEW



ADJACENT CABINET
PLAN VIEW

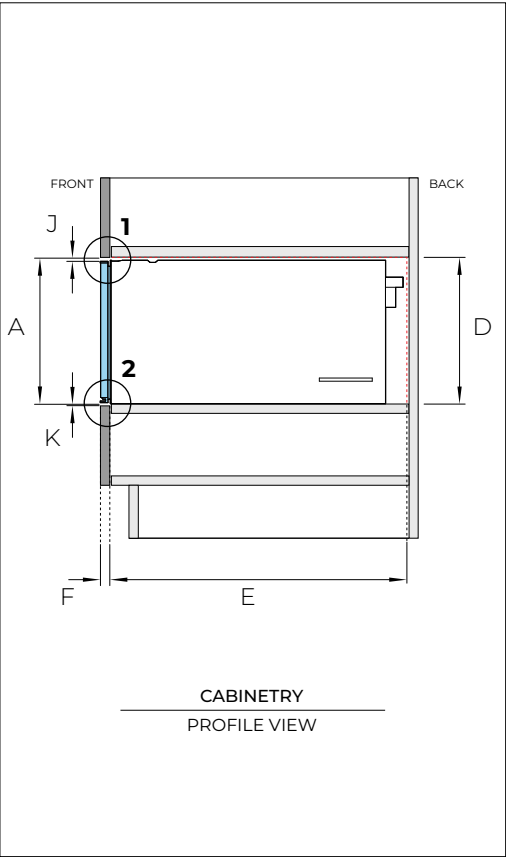

CABINETRY
PROFILE VIEW

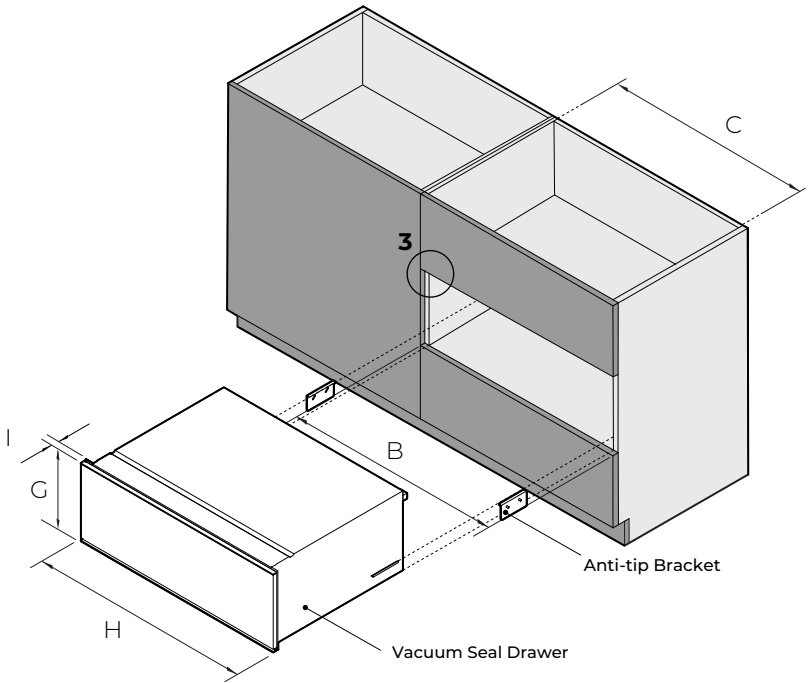

Anti-tip Bracket

Vacuum Seal Drawer

Model no:

Vacuum Seal Drawer 30" - VB30SDX1-SET, VB30SDB1-SET

Cabinetry Dimensions - Flush Installation		inch	mm
A	Overall cabinet height*	10 13/16	275
B	Overall cabinet width - single installation	30 1/16	764
C	Minimum inside width of cavity	28 1/2	724
D	Minimum inside height of cavity	10 3/4	273
E	Minimum inside depth of cavity	22 13/16	580
F	Thickness of cabinetry front panel**	5/8-13/16	16-20

*Overall cabinet height is overall product height with minimum clearance above drawer front panel to upper cabinetry front panel.

**Cabinetry shown in drawings 3/4" (19mm) panels.

Note: Consider placement of shelf above minimum inside height of cavity.

Product Dimensions		inch	mm
G	Overall height of product	10 11/16	271
H	Overall width of product	29 15/16	760
I	Thickness of vacuum seal drawer front panel and flange	13/16	20

Cabinetry Clearances		inch	mm
J	Minimum clearance above drawer front panel to upper cabinetry front panel*	5/32	4
K	Minimum clearance between bottom of drawer chassis to lower cabinetry front panel	1/16	2
L	Minimum clearance between adjacent front panel or appliance	1/16	2

*Achieve a smaller gap between drawer front panel to upper cabinetry front panel by dropping cabinetry front panel down

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available on our website fisherpaykel.com






SERVICES

CONNECTION

Connections may be located in an adjacent cabinet to either side of the appliance. Ensure power will remain accessible following install to allow access for any future product maintenance.

BUILT-IN COFFEE MAKER

The power cable must be long enough to allow the appliance to be extracted from the cabinet to fill the coffee bean container. Fix the power cable with the clip.

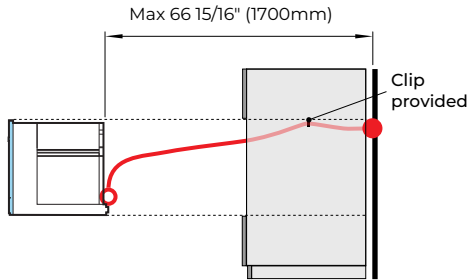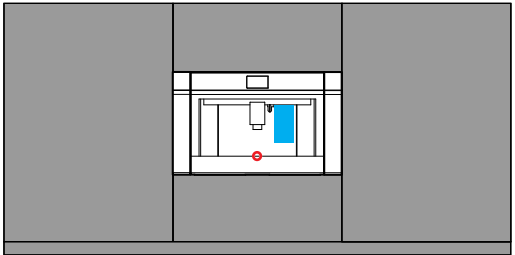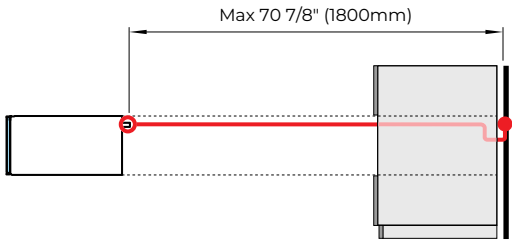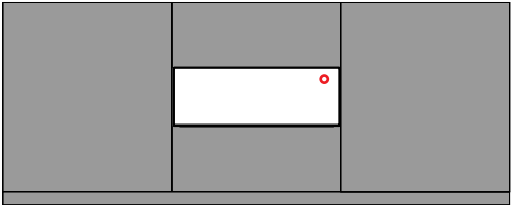

VACUUM SEAL DRAWER
VB30SDX1-SET
VB30SDB1-SET

WARMING DRAWER
WB30SDX1-SET
WB30SDB1-SET

BUILT-IN COFFEE MAKER
EB24DSX1
Trim Kit TK7630NDX1

POWER CORD

Maximum power cord length*	70 7/8" (1800mm)	70 7/8" (1800mm)	66 15/16" (1700mm)
Location	Upper right	Upper right	Lower centered
Connection	Flex cord	Flex cord	Flex cord

*Measured from power outlet

WATER








Total Capacity	-	-	84.5 fl oz (2.5L)
Location	-	-	Water tank (internal)

ELECTRICAL

Supply	120 V, 60 Hz	120 V, 60 Hz	120 V, 60 Hz
Service	10 A	10 A	10 A

Note: Multiple product installation requires the design of power outlets according to local regulations.

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available on our website fisherpaykel.com

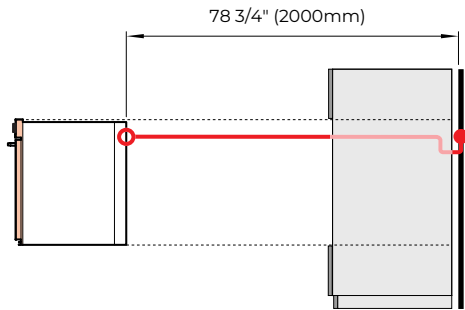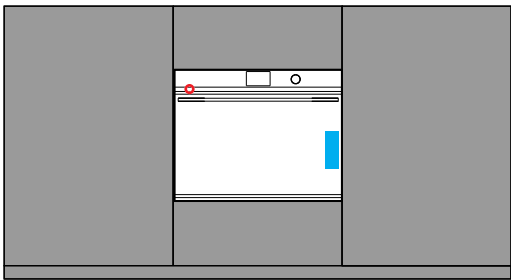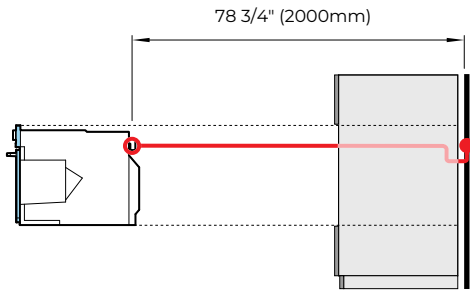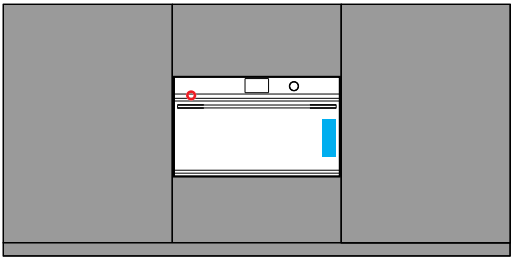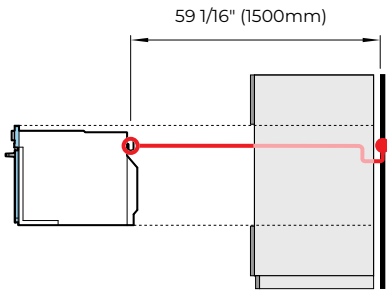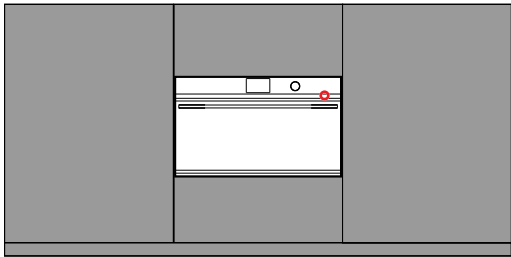



POWER CORD		CONVECTION SPEED OVEN OM30NDTDX1 OM30NDLX1		COMBINATION STEAM OVEN OS30NDTDX1 OS30NDLX1		COMBINATION STEAM OVEN OS30SDTDX1 OS30SDLX1	
Maximum power cord length*		59 1/16" (1500mm)		78 3/4" (2000mm)		78 3/4" (2000mm)	
Location		Upper right		Upper left		Upper left	
Connection		Hard wire**		Hard wire**		Hard wire**	

*Measured from power outlet, supplied with product.
**For more information, refer to the Installation Guide. Ensure power will remain accessible following install to allow access for any future product maintenance.



WATER		COMBINATION STEAM OVEN OS30SDTDX1 OS30SDLX1	
Total Capacity	-	47.3 fl oz (1.4L)	
Location	-	Water tank (internal)	
ELECTRICAL			
Supply	208 or 240 V, 60 Hz	208 or 240 V, 60 Hz	
Service	20 A	20 A	

Note: Multiple product installation requires the design of power outlets according to local regulations.

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available on our website fisherpaykel.com

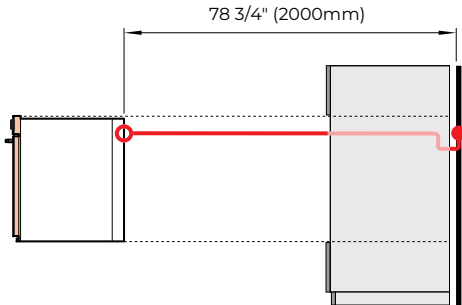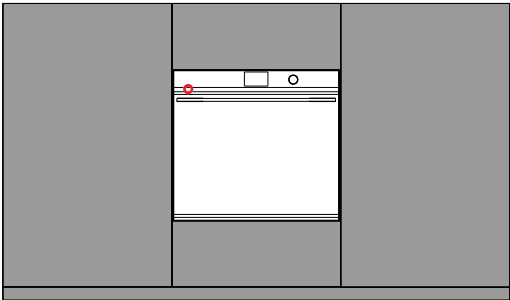

CONVECTION SPEED OVEN
OM30NDTDX1 | OM30NDLX1

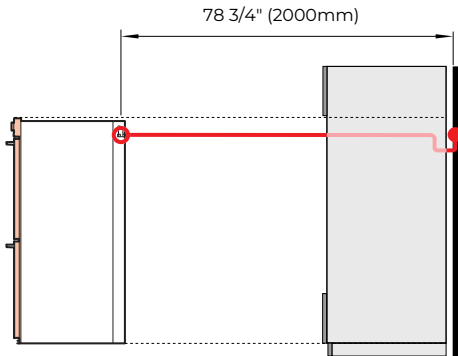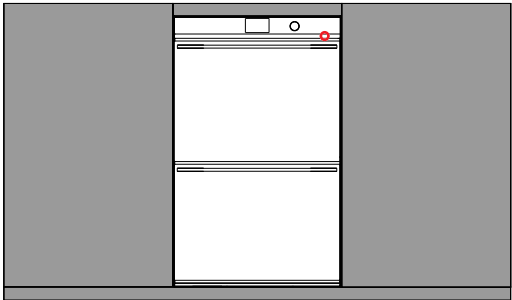

COMBINATION STEAM OVEN
OS30NDTDX1 | OS30NDLX1

 Power Cable

 Water Tank

POWER CORD	
Maximum power cord length*	78 3/4" (2000mm)
Location	Upper left
Connection	Hard wire**

*Measured from power outlet, supplied with product.
**For more information, refer to the Installation Guide. Ensure power will remain accessible following install to allow access for any future product maintenance.

WATER	
Total Capacity	-
Location	-

ELECTRICAL	
Supply	208 or 240 V, 60 Hz
Service	20 A

Note: Multiple product installation requires the design of power outlets according to local regulations.

	78 3/4" (2000mm)
	Upper right
	Hard wire**

	-
	-

	208 or 240 V, 60 Hz
	40 A

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available on our website fisherpaykel.com

