

**76CM BUILT-IN OVENS AND COMPANIONS
CONTEMPORARY STAINLESS STEEL**

PLANNING GUIDE

SERIES 9 & 11

DOUBLE OVEN | OB76DDPTDX2

OVEN | OB76SDPTDX2

STEAM OVEN | OS76NDTDX1

SPEED OVEN | OM76NDTDX1

BUILT-IN COFFEE MAKER | EB60DSX1

TRIM KIT | TK7630NDX1

FISHER & PAYKEL

This comprehensive Planning Guide provides you with the framework and tools to achieve your desired design outcome with Fisher & Paykel appliances. In this guide, you will find a range of conceptual, detailed and dimensional product information to bring your ideas to life and create spaces that truly reflect your vision.

CONTENTS

CONCEPT DESIGN	PAGE	DEVELOPED AND DETAILED DESIGN	PAGE	DEVELOPED AND DETAILED DESIGN	PAGE
Design Choices		Data Sheets		Planning Considerations	
Ovens and Companions - ALL MODELS	4	Double Oven	16	Cabinetry Preparation - ALL MODELS	22
Configurations - ALL MODELS	5	Oven	17	Configurations - ALL MODELS	23
Overview - ALL MODELS	6	Combination Steam Oven	18	Double Oven	24
		Combination Microwave Oven	19	Oven	25
Specification Guides		Built-in Coffee Maker with Trim Kit	20	Combination Steam Oven	26
Double Oven	8			Combination Microwave Oven	27
Oven	9			Built-in Coffee Maker with Trim Kit	28
Combination Steam Oven	10				
Combination Microwave Oven	11			Services	
Built-in Coffee Maker with Trim Kit	12			Power Cord Length and Location	30
Dimensions - ALL MODELS	13				
Power, Weight and Capacity - ALL MODELS	14				

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available on our website fisherpaykel.com

DESIGN CHOICES

COLOUR

OVENS


COMPANIONS

INSTALLATION OPTIONS




STAINLESS
STEEL


OVEN





COMBINATION STEAM




COMBINATION
MICROWAVE



BUILT-IN COFFEE
MAKER




INSTALLATION IN WALL

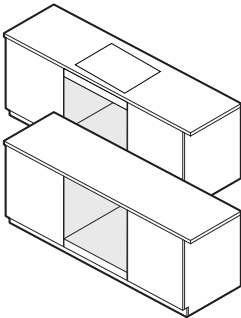


INSTALLATION
UNDER-BENCH

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available on our website fisherpaykel.com


STACKED INSTALLATION

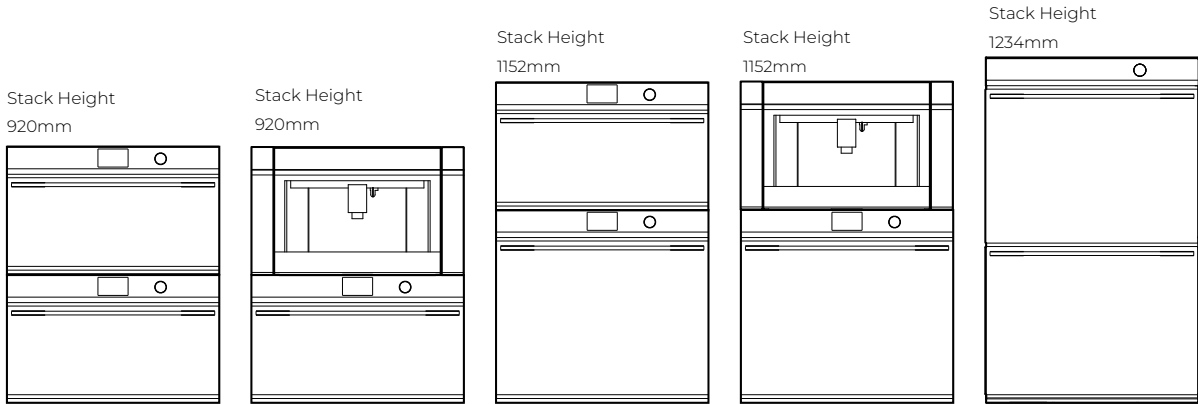

GRID INSTALLATION

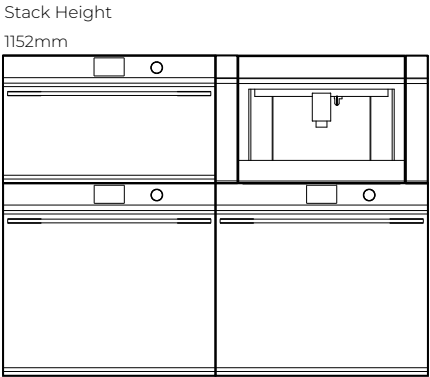

ROW INSTALLATION

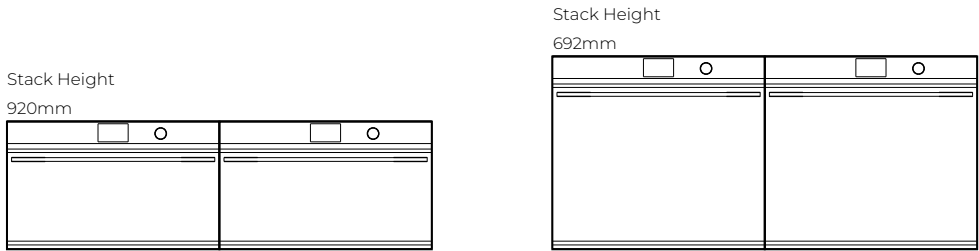


CONSIDERATIONS

Different configurations possible,
consider heights for row and grid
installations.

Note: Stack Height is overall product height with minimum clearance above appliance front panel to upper cabinetry front panel or appliance.

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available on our website fisherpaykel.com

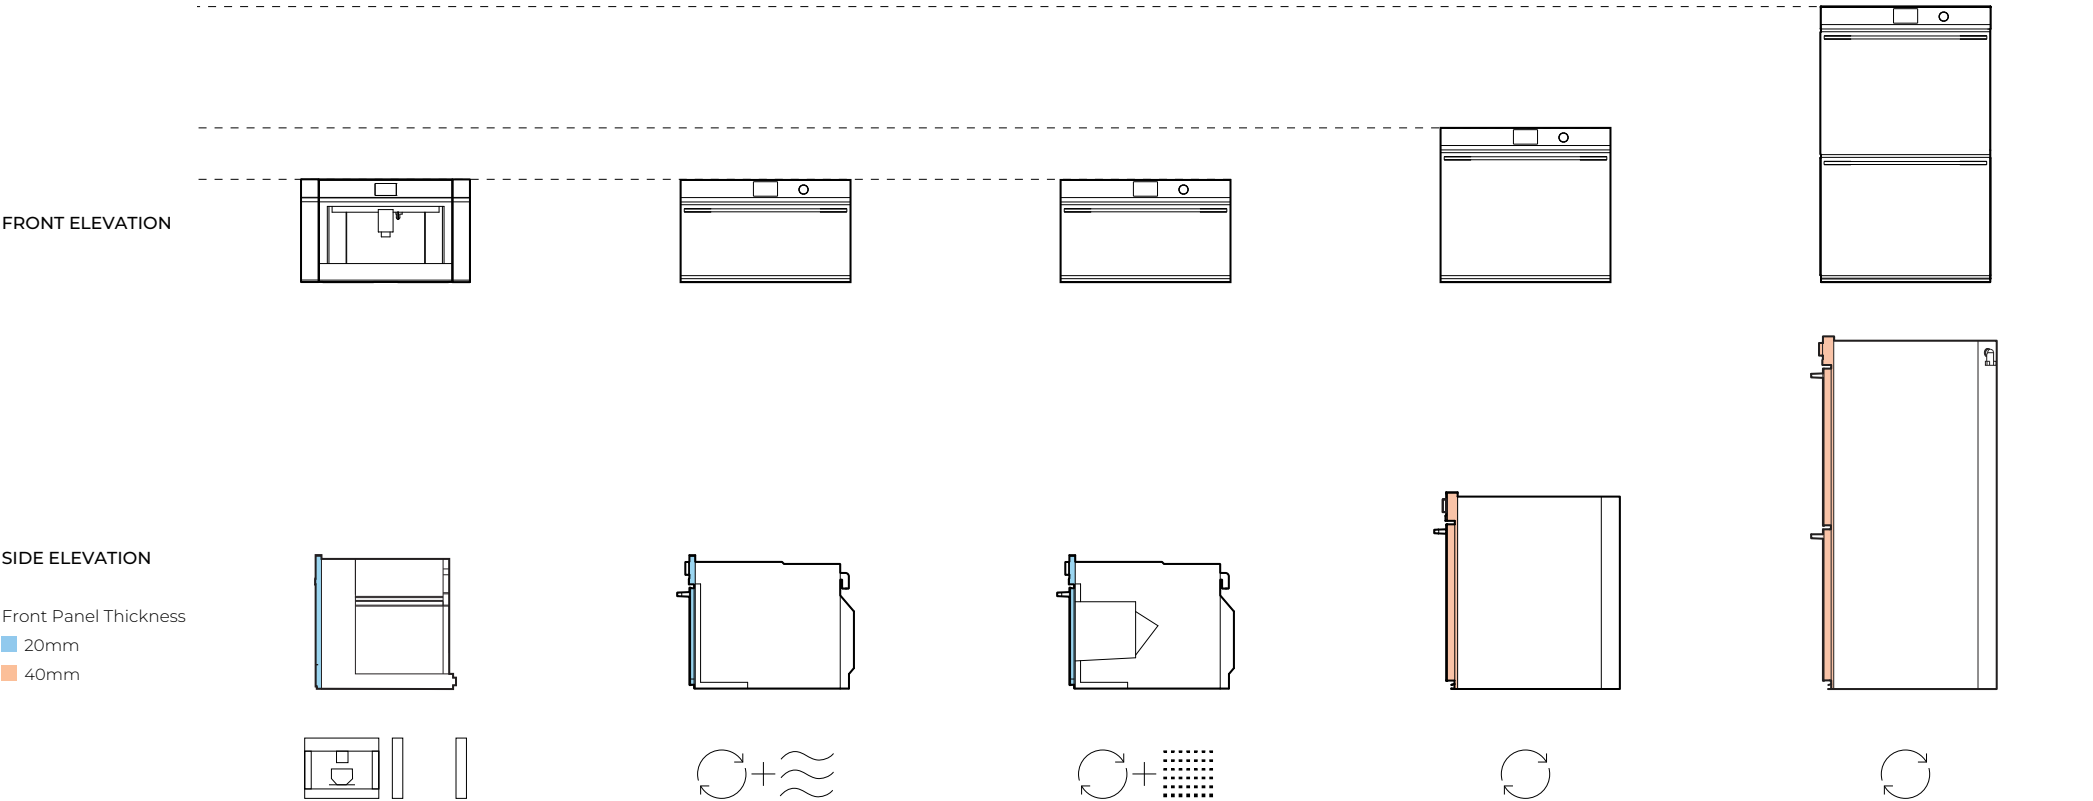

	BUILT-IN COFFEE MAKER WITH TRIM KIT	COMBINATION MICROWAVE OVEN	COMBINATION STEAM OVEN	OVEN	DOUBLE OVEN
Series	Series 9	Series 9	Series 9	Series 9	Series 9
Model Code	EB60DSX1 Trim Kit TK7630NDX1	OM76NDTDX1	OS76NDTDX1	OB76SDPTDX2	OB76DDPTDX2
Interface	4.3" Touchscreen	5" Touchscreen, Dial Control	5" Touchscreen, Dial Control	5" Touchscreen, Dial Control	5" Touchscreen
Height	458mm	458mm	458mm	690mm	1232mm
Front Panel Thickness	20mm	20mm	20mm	40mm	40mm

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available on our website fisherpaykel.com

SPECIFICATION GUIDE

SERIES 9 & 11



OVERVIEW

Enhance your kitchen design with the refined styling of the 76cm Double Oven. Complementing the other products in our Contemporary Stainless Steel collection, you can create a coherent, considered look with ease. Intuitive controls and the performance to deliver perfect results make this double oven beautiful to use.

PRODUCTS

OB76DDPTDX2

Double Oven, 76cm, 17 Function, Self-cleaning, 115L + 115L, Touchscreen, Dial Controls, Stainless Steel

SERIES & STYLE

Series 9
Contemporary Stainless Steel

FEATURES

- 1 Designed to fit flush with cabinetry
- 2 Styled to perfectly match our Contemporary Stainless Steel kitchen appliances
- 3 Generous 115L total capacity per oven, 230L total capacity
- 4 Intuitive, large 5" touchscreen display with illuminated dial
- 5 Guided cooking and recipes
- 6 Perfect results from a variety of oven functions
- 7 Even heat distribution throughout with AeroTech™ technology
- 8 Self-cleaning
- 9 CoolTouch door
- "0 Wi-Fi/Connected capability though the SmartHQ™ app

ACCESSORIES

- 1 Full Extension Sliding Shelves*
- 2 Self-cleaning-proof side racks*
- 3 Roasting dish, tray and rack*
- 4 Wired Temperature Sensor*

*Included with product

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available on our website fisherpaykel.com



OVERVIEW

Enhance your kitchen design with the refined styling. Complementing the other products in our Contemporary Stainless Steel collection, you can create a coherent, considered look with ease. Intuitive controls and the performance to deliver perfect results make this oven beautiful to use.

PRODUCTS

OB76SDPTDX2
Oven, 76cm, 17 Function, 15L, Touchscreen, Dial Controls, Stainless Steel

SERIES & STYLE

Series 9
Contemporary Stainless Steel

FEATURES

- 1 Designed to fit flush with cabinetry
- 2 Styled to perfectly match our Contemporary Stainless Steel kitchen appliances
- 3 Generous 115L total capacity
- 4 Intuitive, large 5" touchscreen display with illuminated dial
- 5 Guided cooking and recipes
- 6 Perfect results from a variety of oven functions
- 7 Even heat distribution throughout with AeroTech™ technology
- 8 Self-cleaning
- 9 Wireless Temperature Sensor precisely monitors cooking in real time
- "0 Wi-Fi/Connected capability though the SmartHQ™ app

ACCESSORIES

- 1 Full Extension Sliding Shelves*
- 2 Self-cleaning-proof side racks*
- 3 Roasting dish, tray and rack*
- 4 Wired Temperature Sensor*
- 5 Wireless Temperature Sensor - Part WTSC1

*Included with product

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available on our website fisherpaykel.com



OVERVIEW

With timeless Contemporary styling, the Combination Steam Oven fits seamlessly into any kitchen. As a companion product, this oven is designed to install easily and fit perfectly with other companion products such as the Vacuum Seal Drawer. It features 23 functions, including steam-only, convection-only, or a combination of both. Reduce the need for oils and fats with six standalone steam functions, perfect for creating flavourful and healthy restaurant-quality meals at home. Beautiful to use, the large 5" touchscreen interface has simple and intuitive guided cooking, helping to ensure perfect results.

PRODUCTS

OS76NDTDX1
Combination Steam Oven, 76cm, 23 Function

SERIES & STYLE

Series 9
Contemporary Stainless Steel

ACCESSORIES

- 1 Full Extension Sliding Shelf*
- 2 Wire Shelf*
- 3 Flat Brushed Baking Tray*
- 4 Roasting Dish*
- 5 Grill Rack*

FEATURES

- 1 Contemporary style, designed to fit flush with cabinetry
- 2 Generous 55L total capacity with four shelf positions
- 3 Intuitive, large 5" touchscreen display with illuminated dial
- 4 23 oven functions including Steam, Sous Vide, Air Fry and Crisp Regenerate
- 5 Guided touchscreen cooking makes it simple to cook by food, function or recipe
- 6 Moisture control and even heat distribution thanks to ActiveVent and AeroTech™ technology
- 7 1.4L water tank
- 8 Wi-Fi enabled and works with the SmartHQ™ app for remote control and notifications
- 9 Steam Clean function ensures a spotless oven with minimal effort
- "0 Soft open and close door

ACCESSORIES

- 6 Perforated Large Steam Dish*
- 7 Perforated Small Steam Dish*
- 8 Large Steam Dish*
- 9 Wired Temperature Sensor*
- "0 Catalytic Panel*
- "1 Descale solution* - 2 sachets (Part 580925)

*Included with product

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available on our website fisherpaykel.com



OVERVIEW

With timeless Contemporary styling, the Combination Microwave Oven fits seamlessly into any kitchen. As a companion product, this Microwave Oven is designed to install easily and fit perfectly with other companion products such as the Combination Steam Oven. A flexible appliance that pairs the speed of microwave cooking with oven technology, which can crisp and brown as it cooks. Featuring 22 cooking functions on an intuitive touch display for easy programming of desired cooking mode and duration.

PRODUCTS

OM76NDTDX1
Combination Microwave Oven, 76cm, 22 Function

SERIES & STYLE

Series 9
Contemporary Stainless Steel

FEATURES

- 1 Contemporary style, designed to fit flush with cabinetry
- 2 49L total capacity
- 3 Intuitive, large 5" touchscreen display with illuminated dial
- 4 Four microwave-only functions, 14 traditional oven functions, and four combination functions
- 5 A Wired Temperature Sensor precisely monitors cooking in real time
- 6 Guided cooking, with the option to access additional functionality via the SmartHQ™ app
- 7 Wi-Fi/Connected capability through the SmartHQ™ app
- 8 Soft open and close door

ACCESSORIES

- 1 Wire Shelf*
- 2 Chrome Shelf Runner*
- 3 Step Down Wire Shelf*
- 4 Grill Rack*
- 5 Glass Tray*
- 6 Wired Temperature Sensor*

*Included with product

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available on our website fisherpaykel.com



OVERVIEW

The Built-in Coffee Maker features a stylish stainless steel finish and can be installed in multiple configurations to suit kitchen design and preference. With 13 beverage options, our Coffee Maker is designed to consistently pour delicious coffee – from Flat White to Latte or Americano. Favourite coffee styles are memorized for a fast brew with the push of a button. A programmable timer turns the Coffee Maker on at the ideal time each day, while the conical burr grinder delivers a consistent grind for a perfect coffee.

PRODUCTS

EB60DSX1
Built-in Coffee Maker, 60cm, Touchscreen, Stainless Steel

TK7630NDX1
Companion Trim Kit, 76cm, Stainless Steel

Note: Trim Kit purchased separately.

SERIES & STYLE

Series 9
Contemporary Stainless Steel

FEATURES


- 1 Designed to pair perfectly with 76cm ovens and companion products
- 2 Stylish stainless steel finish
- 3 Install in multiple configurations to suit your kitchen design
- 4 Intuitive touch display
- 5 13 functions to suit any taste and selection – from Espresso to Latte
- 6 Personalised coffee and smart self-learning menu preferences
- 7 Stainless steel conical burr grinder with 13 coarseness positions
- 8 15 bar pump pressure
- 9 Self-cleaning function and easy to empty coffee grounds container and drip tray
- "0 2.5L water tank capacity

ACCESSORIES

- 1 Thermal milk jug 0.5L*
- 2 Water filter*
- 3 Coffee spoon*
- 4 Extractable steam outlet*
- 5 Descaling agent bottle*

*Included with product

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available on our website fisherpaykel.com

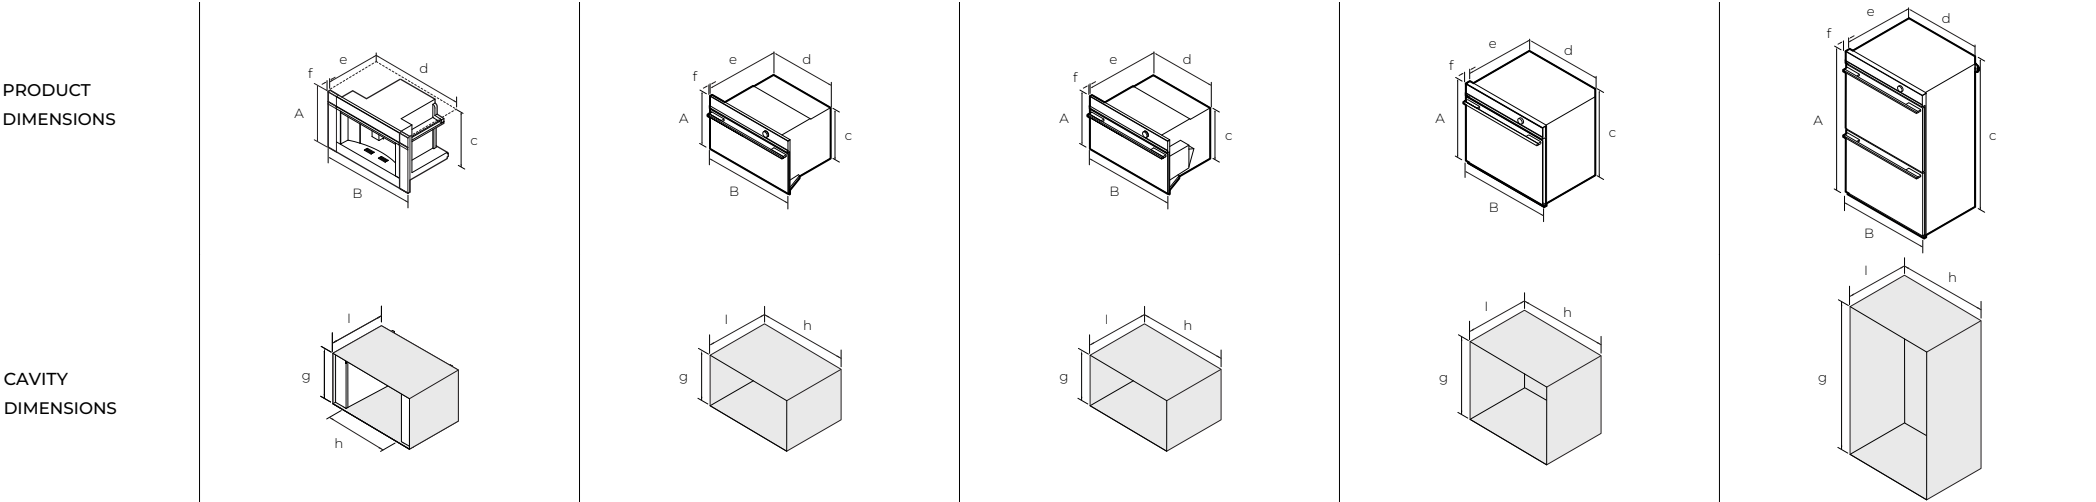

	BUILT-IN COFFEE MAKER EB60DSX1 Trim Kit TK7630NDX1	COMBINATION MICROWAVE OVEN OM76NDTDX1	COMBINATION STEAM OVEN OS76NDTDX1	OVEN OB76SDPTDX2	DOUBLE OVEN OB76DDPTDX2
PRODUCT DIMENSIONS					
A Overall height	458mm**	458mm	458mm	690mm	1232mm
B Overall width	760mm**	760mm	760mm	760mm	760mm
C Chassis height	445mm	435mm	435mm	674mm	1218mm
D Chassis width	560mm	720mm	720mm	720mm	720mm
E Chassis depth	460mm	545mm	545mm	569mm	569mm
F Front panel thickness	20mm**	20mm	20mm	40mm	40mm
Depth of oven door fully open	-	320mm*	320mm*	550mm*	Upper door 550mm* Lower door 530mm*






	* Measured from front of control panel	** Measurements with trim kit			
CAVITY DIMENSIONS - FLUSH INSTALLATION					
G Minimum inside height of cavity	450mm	440mm	440mm	681mm	1224mm
H Minimum inside width of cavity	560mm**	724mm	724mm	724mm	724mm
I Minimum inside depth of cavity***	580mm*	570mm*	570mm	615mm	615mm
Recommended cabinet width	764mm	764mm	764mm	764mm	764mm

* Requires ventilation at the rear of the cavity

** Cabinetry requires additional vertical sidewalls to secure the product

*** Measured from front of control panel

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available on our website fisherpaykel.com



BUILT-IN COFFEE MAKER
EB60DSX1
Trim Kit TK7630NDX1

COMBINATION MICROWAVE OVEN
OM76NDTDX1

COMBINATION STEAM OVEN
OS76NDTDX1

OVEN
OB76SDPTDX2

DOUBLE OVEN
OB76DDPTDX2

POWER REQUIREMENTS

Supply	220-240 V, 50 Hz	220-240 V, 50 Hz	220-240 V, 50 Hz	220-240 V, 50 Hz	220-240 V, 50 Hz
Service	10 A	20 A	20 A	20 A	40 A
Connection	Flex cord 1700mm	Hard wired	Hard wired	Hard wired	Hard wired

WEIGHT

Packaged	EB60DSX1 33kg	55kg	55kg	110kg	184kg
Unpackaged	EB60DSX1 24kg	46kg	46kg	75kg	139kg

CAPACITY

Total oven		49L	55L	115L	115L per oven
Total water tank	2.5L	-	1.4L	-	-

SERVICES


For more information on cord length, water supply and electrical requirements, refer to the 'Services' section of this Planning Guide.

WATER

All Coffee Makers and Steam Ovens have internal water tanks which need to be filled manually.
No external water supply is required.

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available on our website fisherpaykel.com

DATA SHEETS

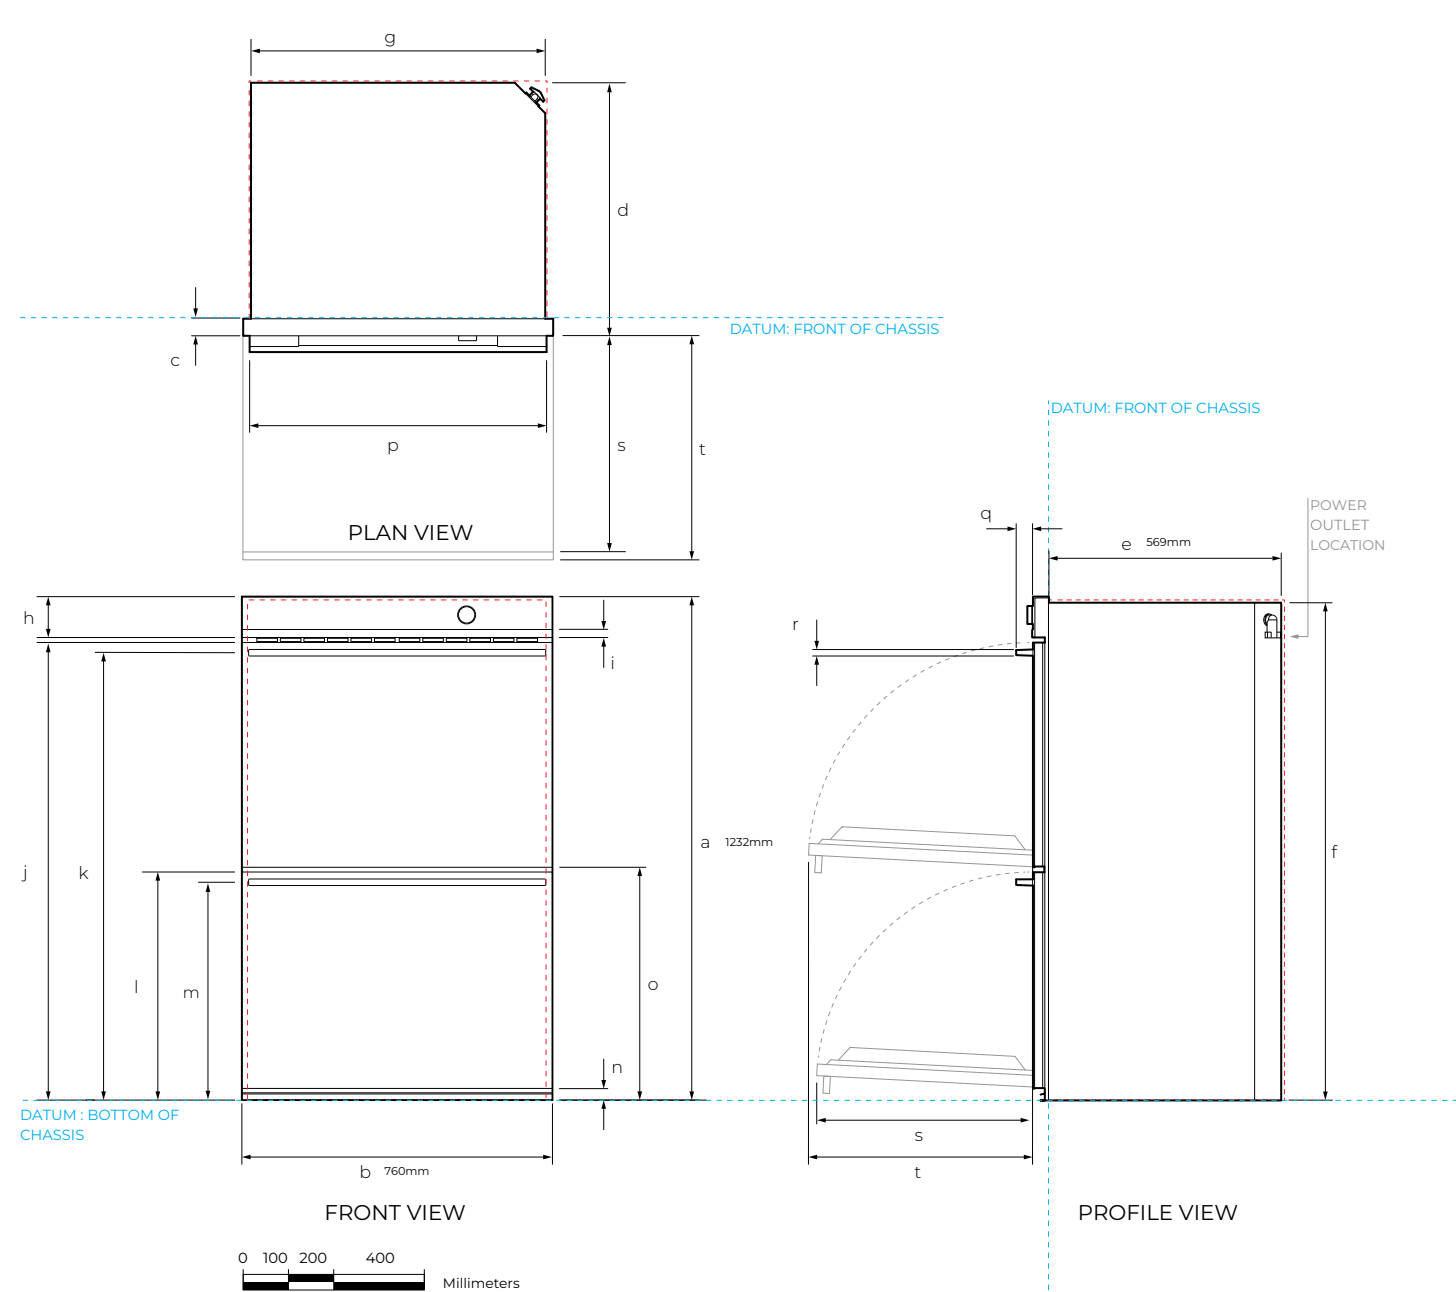

Model no:

Double Oven, 76cm - OB76DDPTDX2

Product Dimensions

	mm
A Overall height of product	1232
B Overall width of product	760
C Depth of control panel (excludes handle, front stainless steel trim and dial)	40
D Depth of chassis and control panel (excludes handle, front stainless steel trim and dial)	609
E Depth of chassis	569
F Height of chassis	1218
G Width of chassis	720
H Height of control panel	100
I Height of stainless steel trim on control panel	20
J Height from bottom datum to top of upper oven door	1120
K Height from bottom datum to centerline upper of handle	1095
L Height from bottom datum to top of lower oven door	558
M Height from bottom datum to centerline of lower handle	533
N Height from bottom datum to bottom of lower door	29
O Height from bottom datum to bottom of upper door	570
P Width of handle	727
Q Depth of handle	42
R Thickness of handle	16
S Depth of lower door when open (measured from front of door)	530
T Depth of upper door when open (measured from front of door)	550

Minimum Clearances - Flush Installation

	mm
Minimum inside height of cavity	1224
Minimum inside width of cavity	724
Minimum inside depth of cavity*	615
Minimum clearance above oven control panel to upper cabinetry front panel or appliance	2
Minimum clearance between bottom of oven chassis to lower cabinetry front panel or appliance	2


*Measured from front of control panel

Note: Depending on cabinet panel thickness a rebate around control panel might be required.

IMPORTANT NOTE: For full installation and clearance details please refer to our installation manual.

INDICATES PRODUCT DATUM
INDICATES CABINETRY CLEARANCES

IMPORTANT NOTE: Throughout this guide, dimensions may vary by $\pm 2\text{mm}$ (1/16"). Please read the Installation Guide for detailed information on installing the product. For full installation instructions visit [fisherpaykel.com](https://www.fisherpaykel.com)

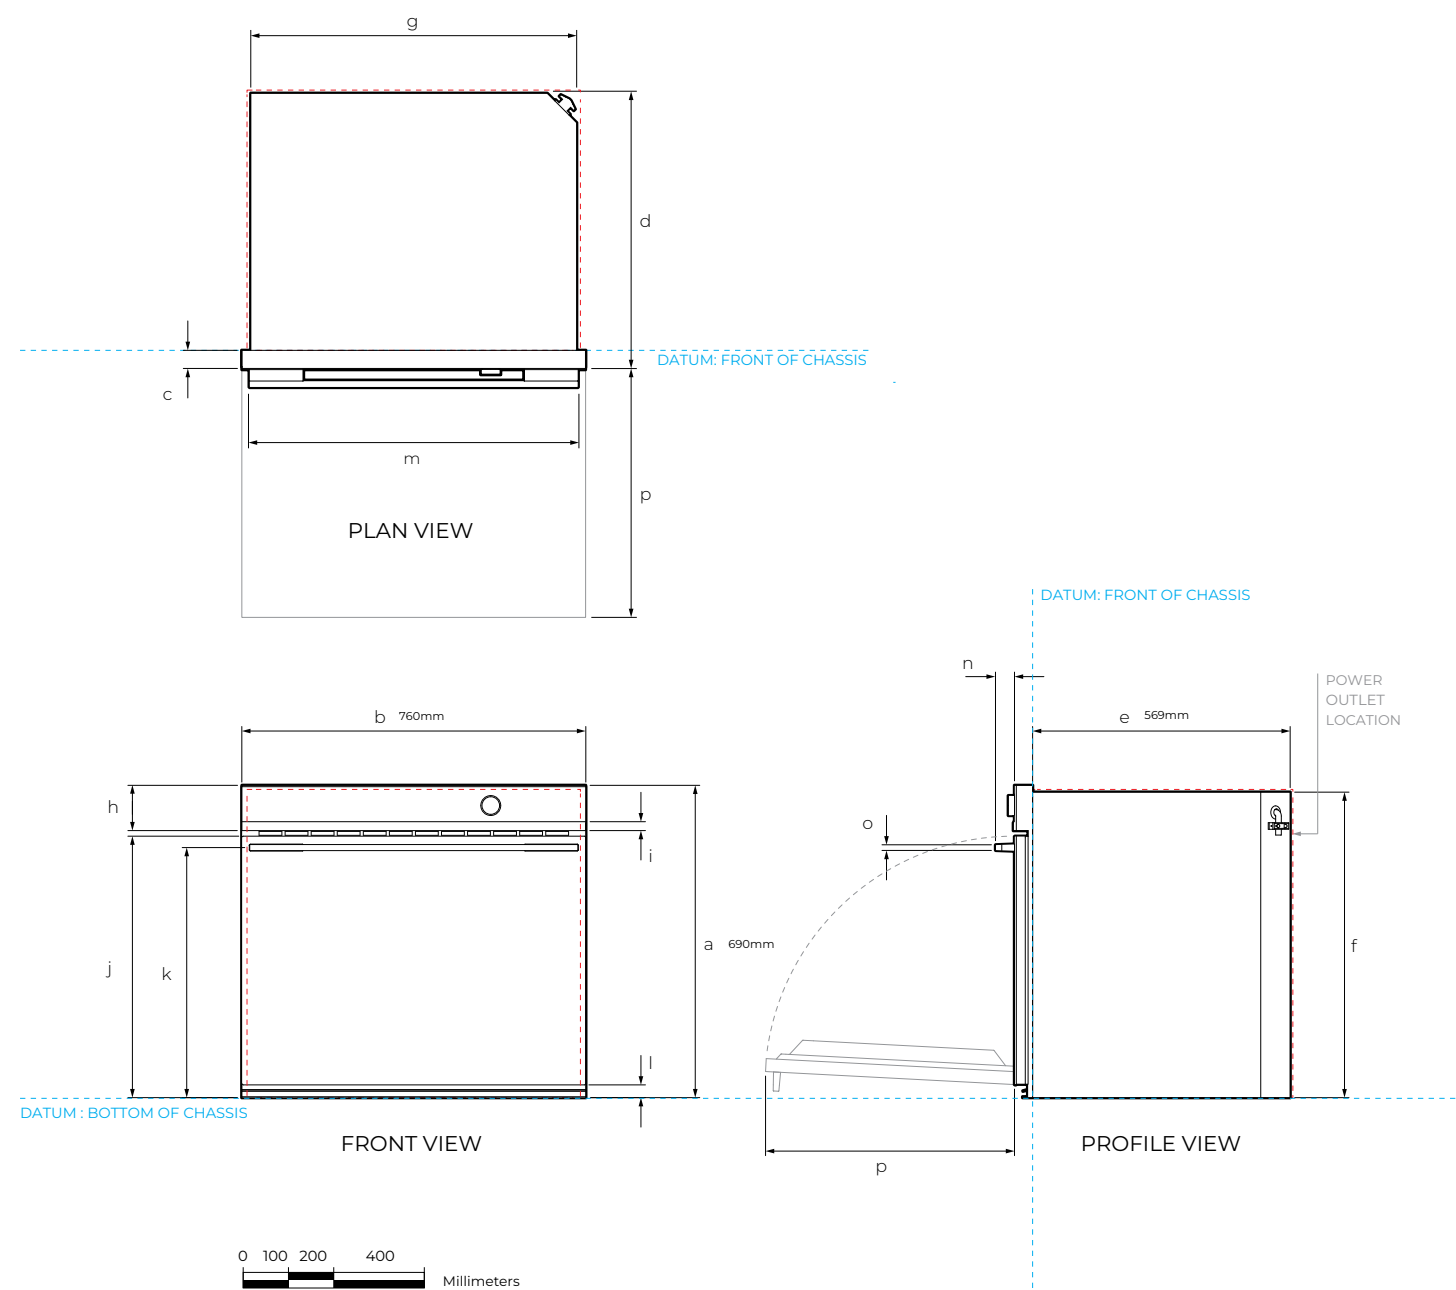

Model no:

Oven, 76cm - OB76SDPTDX2

Product Dimensions	mm
A Overall height of product	690
B Overall width of product	760
C Depth of control panel (excludes handle, front black aluminum trim and dial)	40
D Depth of chassis and control panel (excludes handle, front black aluminum trim and dial)	609
E Depth of chassis	569
F Height of chassis	674
G Width of chassis	720
H Height of control panel	100
I Height of black aluminum trim on control panel	20
J Height from bottom datum to top of oven door	578
K Height from bottom datum to centerline of handle	553
L Height from bottom datum to bottom of door	28
M Width of handle	727
N Depth of handle	42
O Thickness of handle	16
P Depth of door when open (measured from front of door)	550

Minimum Clearances - Flush Installation	mm
Minimum inside height of cavity	681
Minimum inside width of cavity	724
Minimum inside depth of cavity*	615
Minimum clearance above oven control panel to upper cabinetry front panel or appliance	2
Minimum clearance between bottom of oven chassis to lower cabinetry front panel or appliance	2
*Measured from front of control panel	


Note: Depending on cabinet panel thickness a rebate around control panel might be required.

Ensure a 5mm minimum clearance is maintained between the top of the oven chassis and the cabinetry. Ensure the oven is not bearing any weight from cabinetry or products installed above.

IMPORTANT NOTE: For full installation and clearance details please refer to our installation manual.

INDICATES PRODUCT DATUM
INDICATES CABINETRY CLEARANCES

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the Installation Guide for detailed information on installing the product. For full installation instructions visit fisherpaykel.com

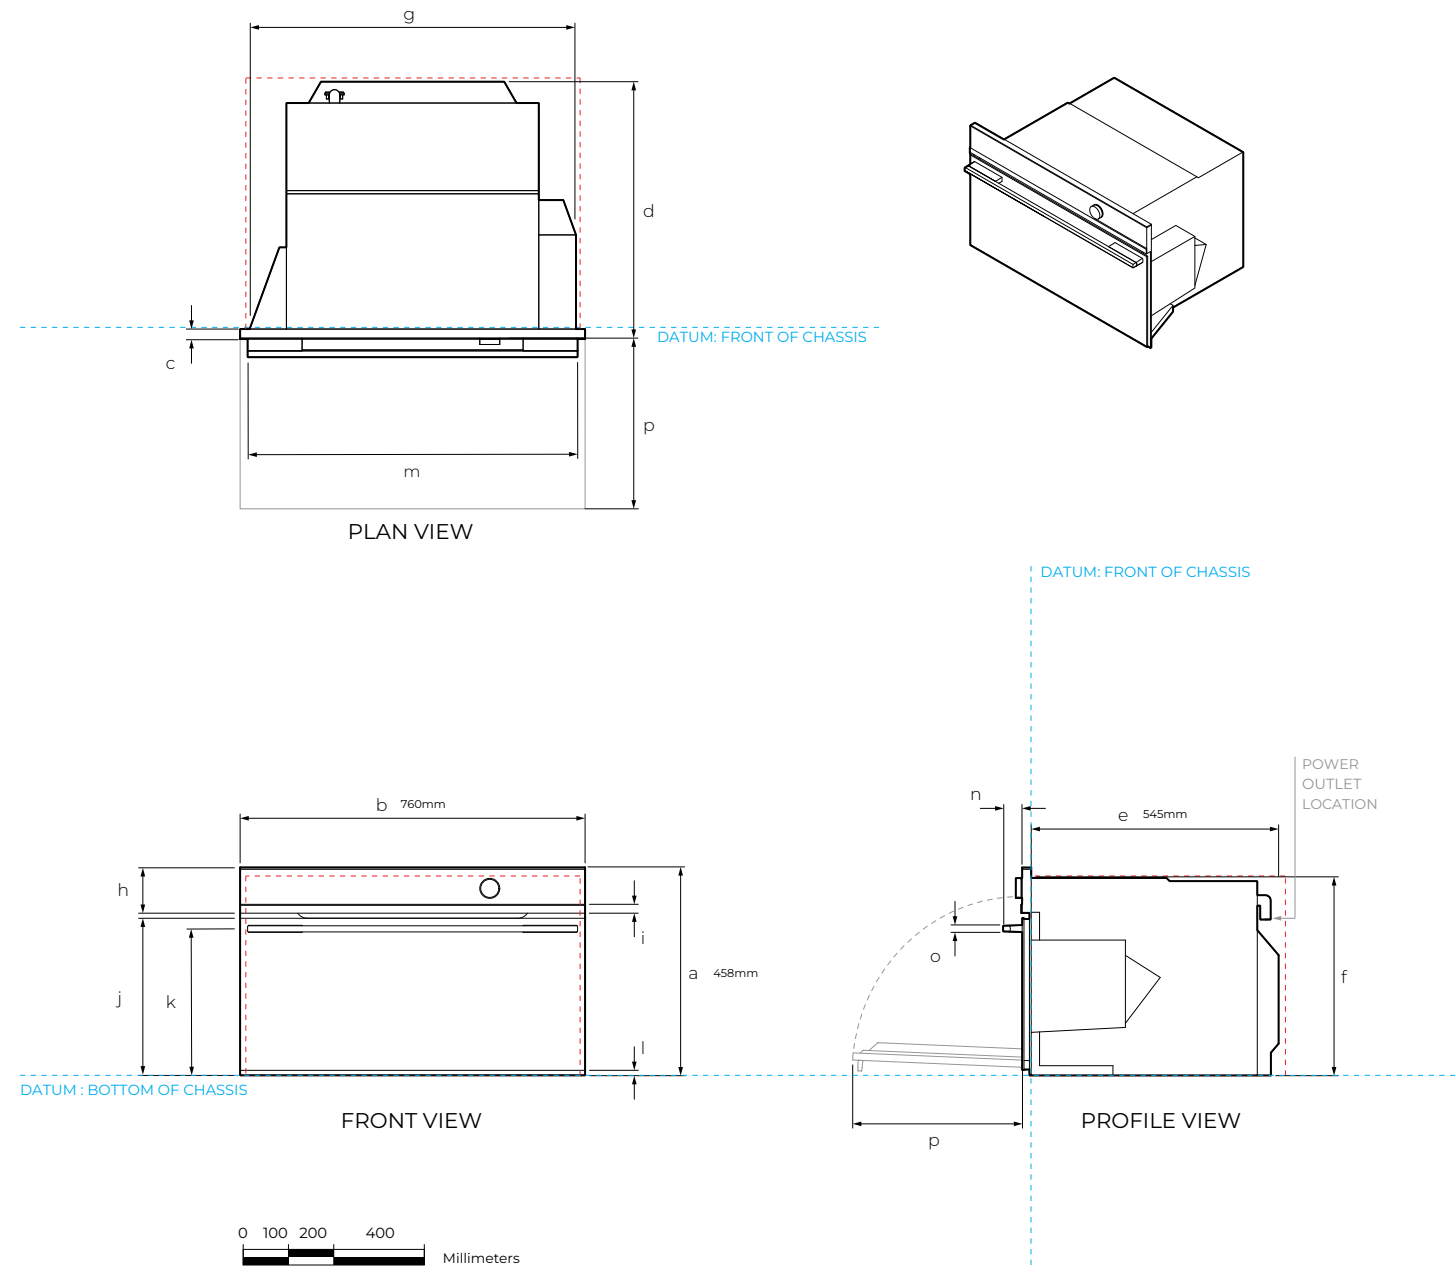

Model no:
Combination Steam Oven, 76cm - OS76NDTDX1

Product Dimensions	mm
A Overall height of product	458
B Overall width of product	760
C Depth of control panel (excludes handle, front black aluminum trim and dial)	20
D Depth of chassis and control panel (excludes handle, front black aluminum trim and dial)	565
E Depth of chassis	545
F Height of chassis	435
G Width of chassis	720
H Height of control panel	100
I Height of black aluminum trim on control panel	20
J Height from bottom datum to top of oven door	347
K Height from bottom datum to centerline of handle	324
L Height from bottom datum to bottom of door	12
M Width of handle	727
N Depth of handle	42
O Thickness of handle	16
P Depth of door when open (measured from front of door)	320

Minimum Clearances - Flush Installation	mm
Minimum inside height of cavity	440
Minimum inside width of cavity	724
Minimum inside depth of cavity*	570
Minimum clearance above oven control panel to upper cabinetry front panel or appliance	2
Minimum clearance between bottom of oven chassis to lower cabinetry front panel or appliance	2


*Measured from front of control panel

Ensure a 5mm minimum clearance is maintained between the top of the oven chassis and the cabinetry. Ensure the oven is not bearing any weight from cabinetry or products installed above.


IMPORTANT NOTE: For full installation and clearance details please refer to our installation manual.

INDICATES PRODUCT DATUM
INDICATES CABINETY CLEARANCES

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the Installation Guide for detailed information on installing the product. For full installation instructions visit fisherpaykel.com

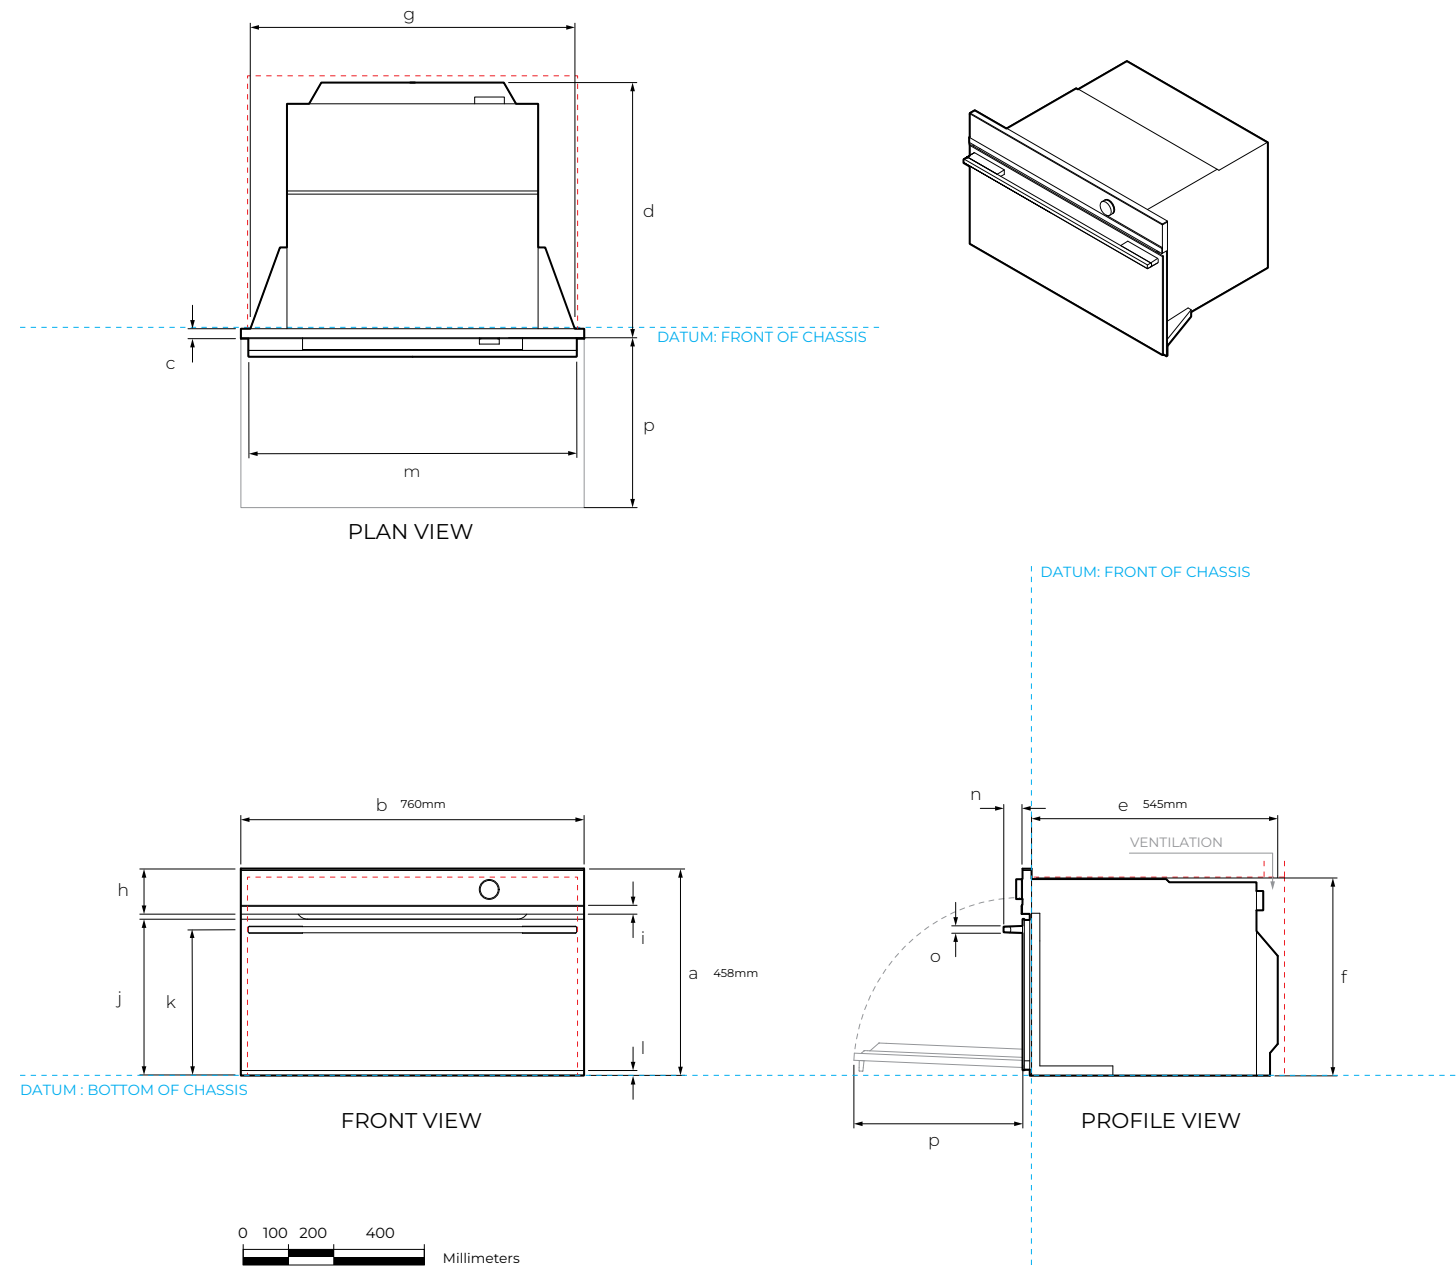

Model no:	
Combination Microwave Oven 76cm - OM76NDTDX1	
Product Dimensions	mm
A Overall height of product	458
B Overall width of product	760
C Depth of control panel (excludes handle, front black aluminum trim and dial)	20
D Depth of chassis and control panel (excludes handle, front black aluminum trim and dial)	565
E Depth of chassis	545
F Height of chassis	435
G Width of chassis	720
H Height of control panel	100
I Height of black aluminum trim on control panel	20
J Height from bottom datum to top of oven door	347
K Height from bottom datum to centerline of handle	324
L Height from bottom datum to bottom of door	12
M Width of handle	727
N Depth of handle	42
O Thickness of handle	16
P Depth of door when open (measured from front of door)	320
Minimum Clearances - Flush Installation	mm
Minimum inside height of cavity	440
Minimum inside width of cavity	724
Minimum inside depth of cavity*	570
Rear ventilation depth**	50
Rear ventilation width**	560
Minimum clearance above oven control panel to upper cabinetry front panel or appliance	2
Minimum clearance between bottom of oven chassis to lower cabinetry front panel or appliance	2
*Measured from front of control panel	
**Rear ventilation totalling 280cm ² is required. The air vent must be located at the rear of cabinet, it can be positioned at the base, sides, back or top of the cavity.	
IMPORTANT NOTE: For full installation and clearance details please refer to our installation manual.	
INDICATES PRODUCT DATUM	
INDICATES CABINETRY CLEARANCES	
IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the Installation Guide for detailed information on installing the product. For full installation instructions visit fisherpaykel.com	

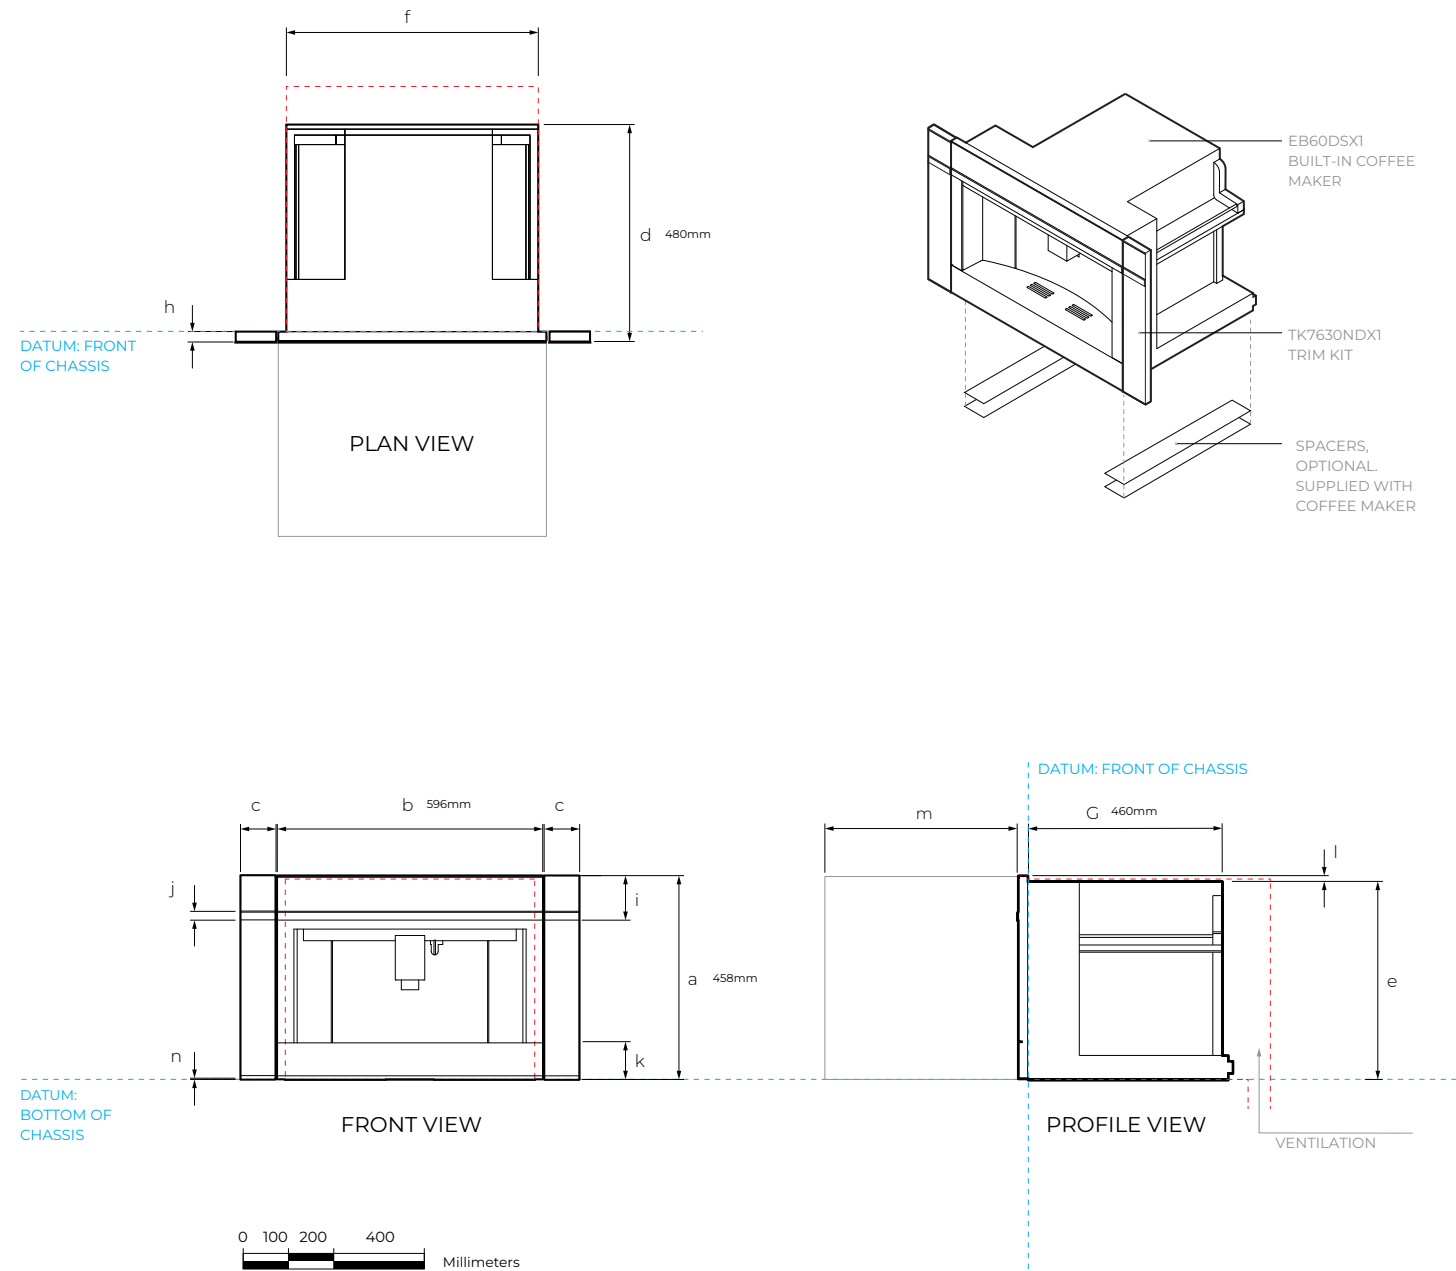

Model no:	
Built-in Coffee Maker, 60cm - EB60DSX1	
Trim Kit, 76cm - TK7630NDX1	
Product Dimensions	
A	mm
Overall height of built-in coffee maker and trim kit	458
B	596
Overall width of built-in coffee maker	
C	79
Overall width of trim kit	
D	480
Overall depth of built-in coffee maker and trim kit (excludes front metal trim)	
E	445
Height of chassis of built-in coffee maker	
F	560
Width of chassis of built-in coffee maker	
G	460
Depth of chassis of built-in coffee maker	
H	20
Depth of coffee maker front frame and control panel (excludes front metal trim)	
I	100
Height of control panel	
J	20
Height of metal cap on control panel	
K	85
Height of horizontal lower section from bottom datum	
L	13
Stepdown from control panel to chassis	
M	435
Extent built-in coffee maker pulls out (measured from glass front)	
N	3
Height from bottom datum to lower edge of glass	
Minimum Clearances - Flush Installation	
mm	
Minimum inside height of cavity	450
Minimum inside width of cavity	560
Minimum inside depth of cavity*	580
Rear ventilation depth**	50
Rear ventilation width**	560
Minimum clearance above Trim Kit to upper cabinetry front panel or appliance	2
Minimum clearance between bottom of Trim Kit to lower cabinetry front panel or appliance	2
*Measured from front of control panel	
**Rear ventilation totalling 280cm2 is required. The air vent must be located at the rear of cabinet, it can be positioned at the base, sides, back or top of the cavity.	
IMPORTANT NOTE: For full installation and clearance details please refer to our installation manual.	
INDICATES PRODUCT DATUM	
INDICATES CABINETRY CLEARANCES	
IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the Installation Guide for detailed information on installing the product. For full installation instructions visit fisherpaykel.com	

PLANNING CONSIDERATIONS

DIVIDING SHELF

If the appliance front panel is thicker than the cabinetry front panel, adjust the dividing shelf depth to ensure the oven sits flush with the front of the cabinetry.

BLACK CLASHING



Black clashing is recommended on front facing edges where products are located and on side cabinets if cabinet is rebated.

OVEN CABINETRY TRIM

If using light-colored cabinets, we recommend using black cabinetry trim to help hide the cabinetry beneath the front door panel of the appliance. Ensure the trim height does not interfere with any appliances or cabinetry below. Black cabinetry trim is included with ovens.


LEVEL CABINETRY

Check the shelves are level and the side panels are straight.

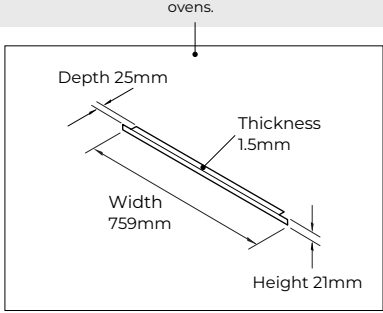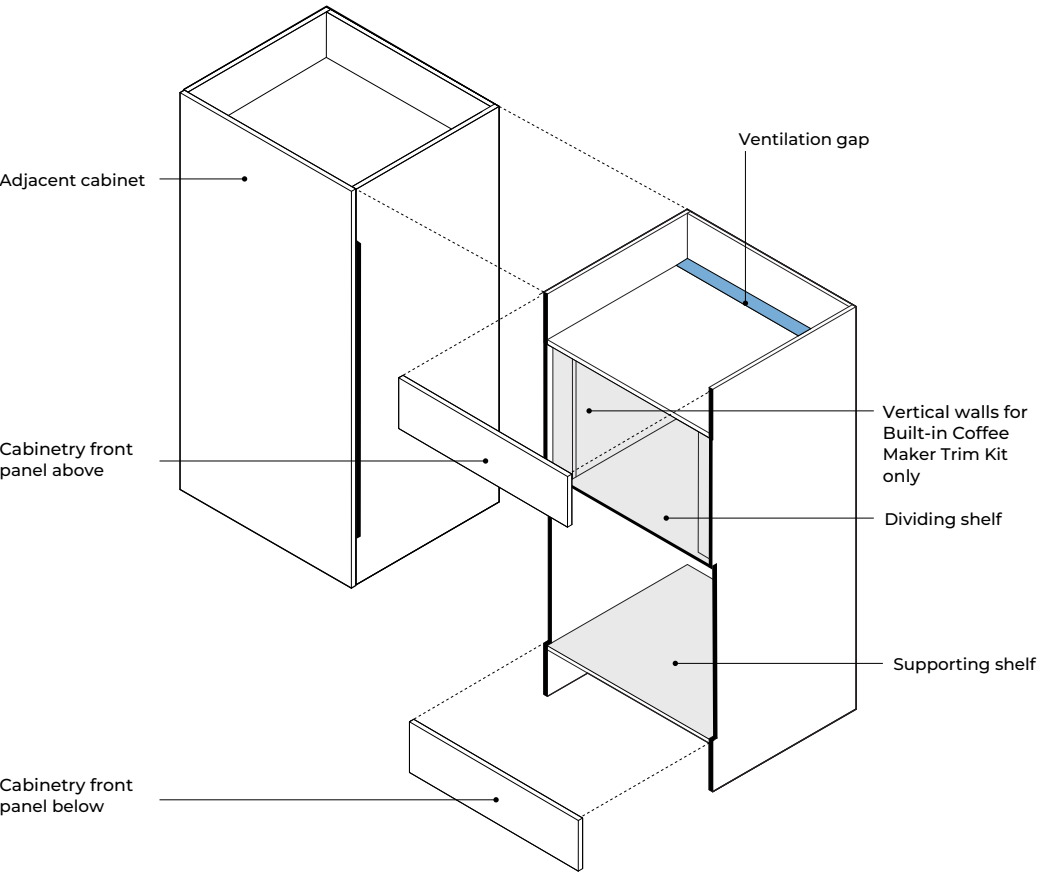

Combination Steam Oven or Convection Speed Oven or Built-in Coffee Maker

Oven

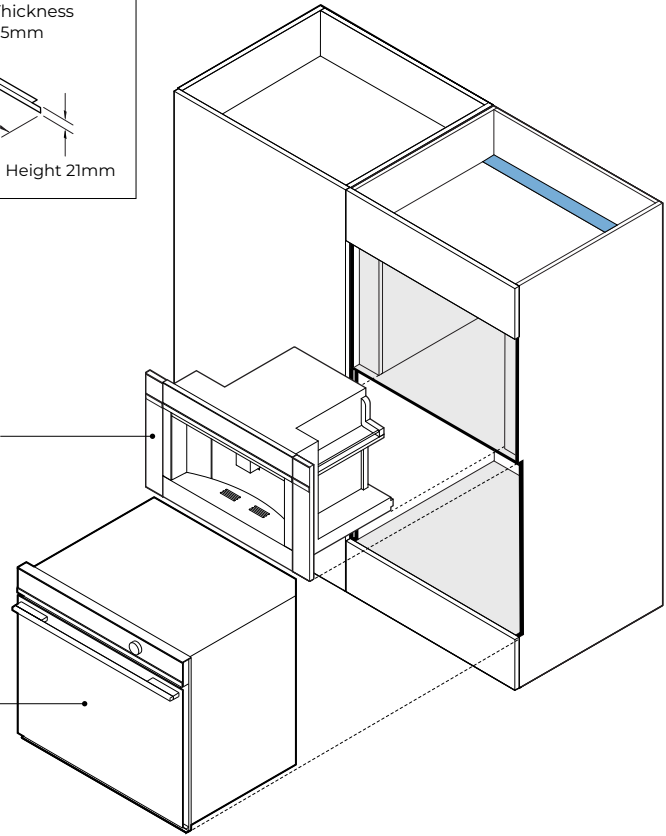


The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available on our website fisherpaykel.com

Ventilation air vent is required at rear for some products.


Dividing shelves are required to support stacked appliances and to achieve correct clearance.

Dividing shelves must be constructed from **material** that will support the weight of the appliances.

Ensure the oven is not bearing any weight from cabinetry or products installed above.

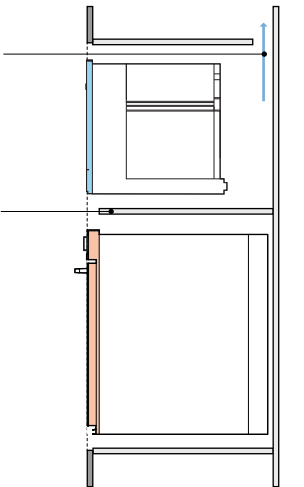


STACK EXPLODED
PROFILE VIEW




Minimum clearance above appliance control panel to upper
appliance

STACK HEIGHT


A Overall product height
+
B Minimum clearance above appliance control panel or
front panel to upper appliance
=
C Stacked Height

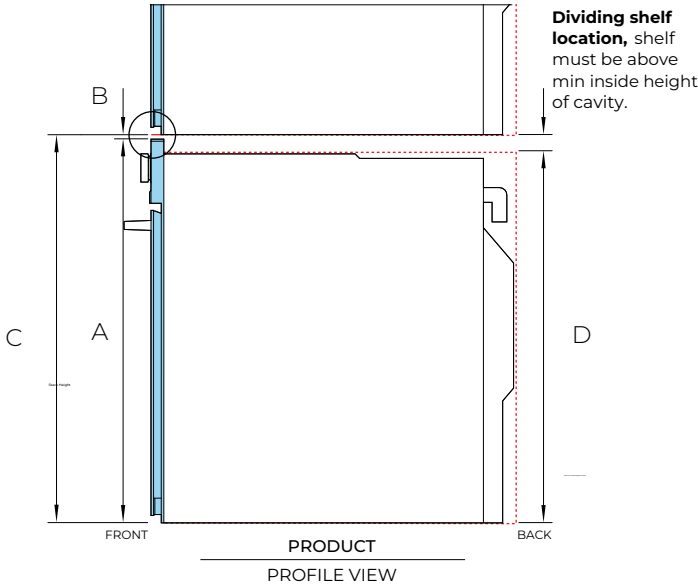


MINIMUM
DIMENSION
CLEARANCES




BUILT-IN COFFEE MAKER
EB60DSX1
Trim Kit TK7630NDX1




COMBINATION MICROWAVE OVEN
OM76NDTDX1



COMBINATION STEAM OVEN
OS76NDTDX1



OVEN
OB76SDPTDX2






DOUBLE OVEN
OB76DDPTDX2

DIMENSIONS					
A Overall product height	458mm*	458mm	458mm	690mm	1232mm
B Minimum clearance above	-	2mm	2mm	2mm	2mm
C Stack height	460mm	460mm	460mm	692mm	1234mm
D Minimum inside height of cavity	440mm	440mm	440mm	681mm	1224mm

* Includes Built-in Coffee Maker rail height

NOTE: Stack height is overall product height with minimum clearance above appliance control panel or front panel to upper appliance.

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available on our website fisherpaykel.com

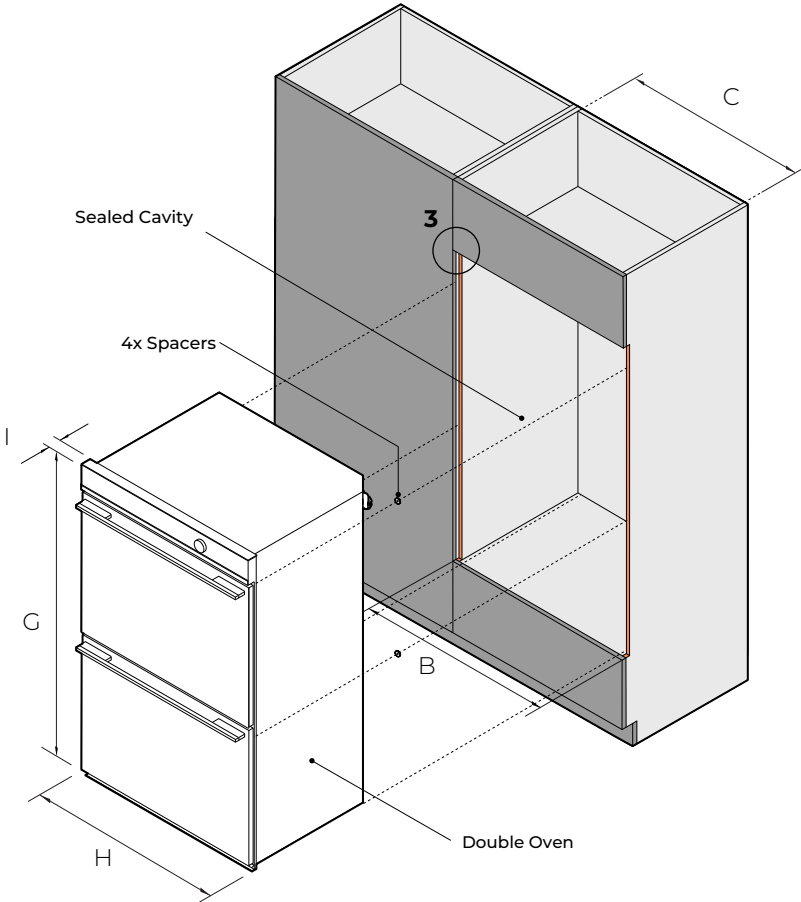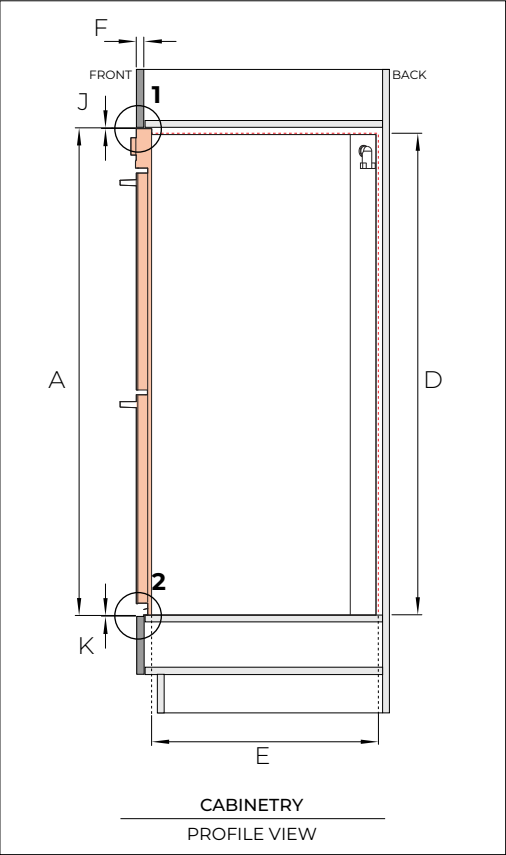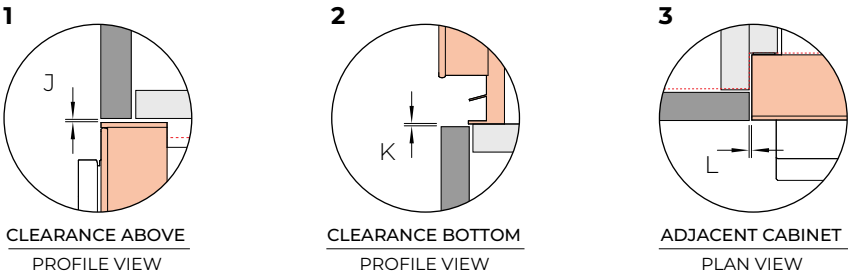

Model no:
Double Oven, 76cm - OB76DDPTDX2

Cabinetry Dimensions - Flush Installation		mm
A	Overall cabinet height*	1234
B	Overall cabinet width - single installation	764
C	Minimum inside width of cavity	724
D	Minimum inside height of cavity	1224
E	Minimum inside depth of cavity	575
F	Thickness of cabinetry front panel**	16-20

*Overall cabinet height is overall product height with minimum clearance above oven control panel to upper cabinetry front panel.
**Cabinetry shown in drawings 19mm panels.

Note: Oven requires 2mm spacers for screws (supplied x 4).

Product Dimensions		mm
G	Overall height of product	1232
H	Overall width of product	760
I	Thickness of oven control panel*	40




*If the oven control panel is thicker than 20mm, adjust the panel above and below to ensure the oven sits flush with the front of the cabinetry.

Cabinetry Clearances		mm
J	Minimum clearance above oven control panel to upper cabinetry front panel	2
K	Minimum clearance between bottom of oven chassis to lower cabinetry front panel	2
L	Minimum clearance between adjacent front panel or appliance	2

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available on our website fisherpaykel.com

COOKTOP CLEARANCE

If installing a cooktop above the oven, ensure adequate clearance is provided for the cooktop as per the cooktop manufacturer's instructions.

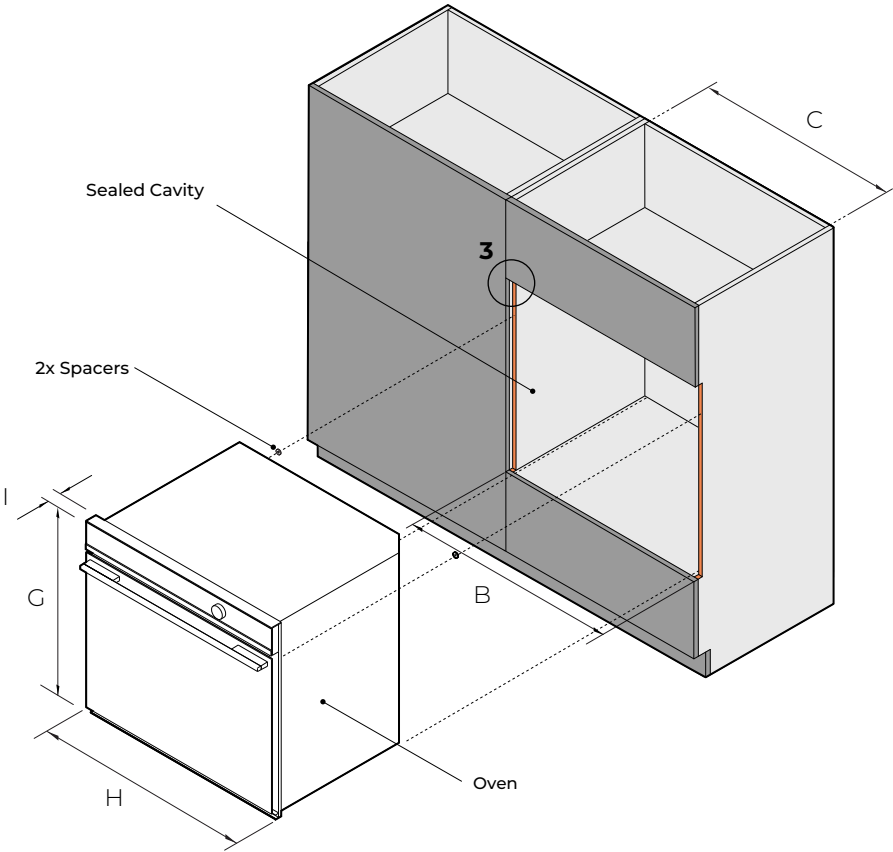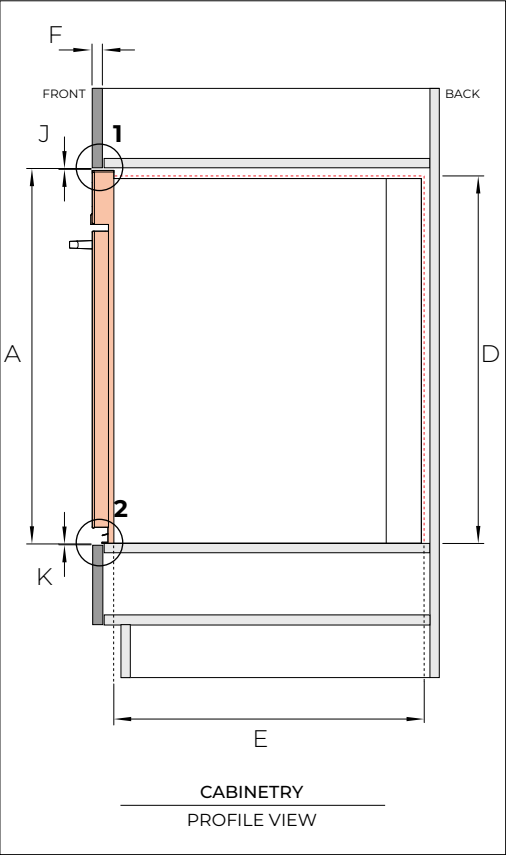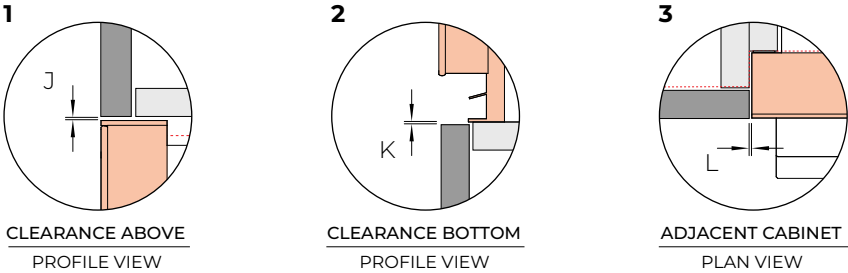

Model no:
Oven, 76cm - OB76SDPTDX2

Cabinetry Dimensions - Flush Installation		mm
A	Overall cabinet height*	692
B	Overall cabinet width - single installation	764
C	Minimum inside width of cavity	724
D	Minimum inside height of cavity	681
E	Minimum inside depth of cavity	575
F	Thickness of cabinetry front panel**	16-20

*Overall cabinet height is overall product height with minimum clearance above oven control panel to upper cabinetry front panel.
**Cabinetry shown in drawings 19mm panels.

Note: Oven requires 2mm spacers for screws (supplied x 2).

Product Dimensions		mm
G	Overall height of product	690
H	Overall width of product	760
I	Thickness of oven control panel*	40


*If the oven control panel is thicker than 20mm, adjust the panel above and below to ensure the oven sits flush with the front of the cabinetry.

Cabinetry Clearances		mm
J	Minimum clearance above oven control panel to upper cabinetry front panel	2
K	Minimum clearance between bottom of oven chassis to lower cabinetry front panel	2
L	Minimum clearance between adjacent front panel or appliance	2


The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available on our website fisherpaykel.com

COOKTOP CLEARANCE


If installing a cooktop above the oven, ensure adequate clearance is provided for the cooktop as per the cooktop manufacturer's instructions.




CLEARANCE ABOVE
PROFILE VIEW




CLEARANCE BOTTOM
PROFILE VIEW



ADJACENT CABINET
PLAN VIEW

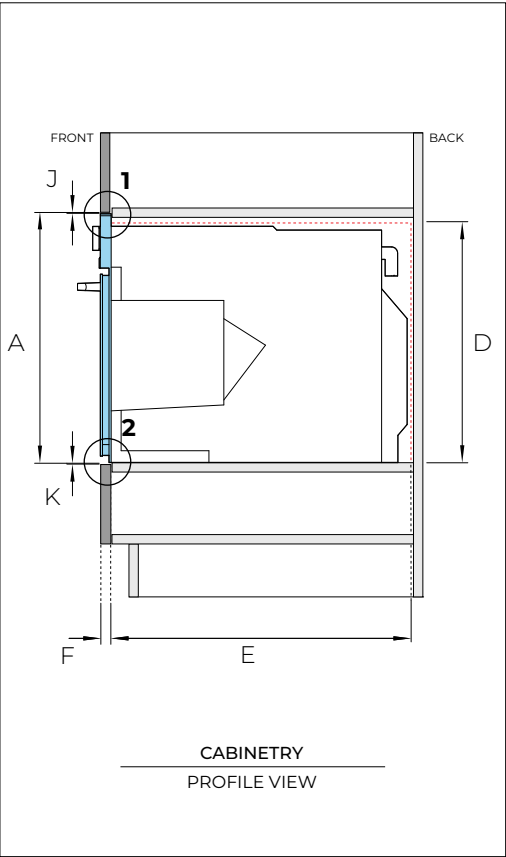

CABINETRY
PROFILE VIEW

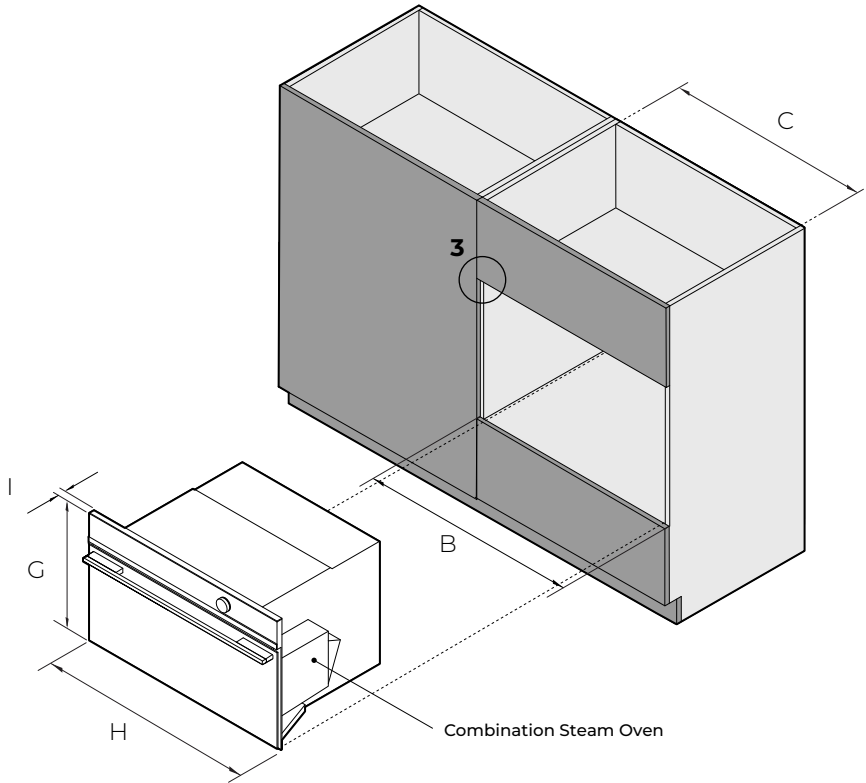

Combination Steam Oven

Model no:

Combination Steam Oven, 76cm - OS76NDTDX1

Cabinetry Dimensions - Flush Installation

	mm
A Overall cabinet height*	460
B Overall cabinet width - single installation	764
C Minimum inside width of cavity	724
D Minimum inside height of cavity	440
E Minimum inside depth of cavity	550
F Thickness of cabinetry front panel**	16-20

*Overall cabinet height is overall product height with minimum clearance above oven control panel to upper cabinetry front panel.

**Cabinetry shown in drawings 19mm panels.

Note: Consider placement of shelf above minimum inside height of cavity.

Product Dimensions

	mm
G Overall height of product	458
H Overall width of product	760
I Thickness of oven front panel	20


Cabinetry Clearances

	mm
J Minimum clearance above oven control panel to upper cabinetry front panel	2
K Minimum clearance between bottom of oven chassis to lower cabinetry front panel	2
L Minimum clearance between adjacent front panel or appliance	2


The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available on our website fisherpaykel.com

VENTILATION


Ventilation of 50mm x 560mm or totalling 280cm² is required. The air vent must be located at the rear of cabinet, it can be positioned at the base, top, sides, or back.





CLEARANCE ABOVE
PROFILE VIEW



CLEARANCE BOTTOM
PROFILE VIEW



ADJACENT CABINET
PLAN VIEW

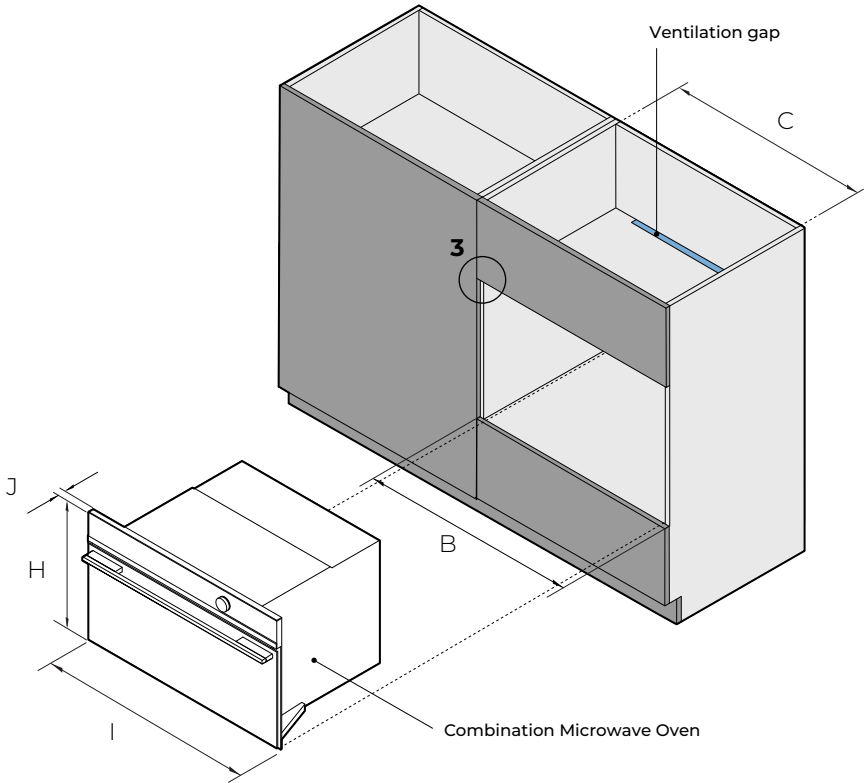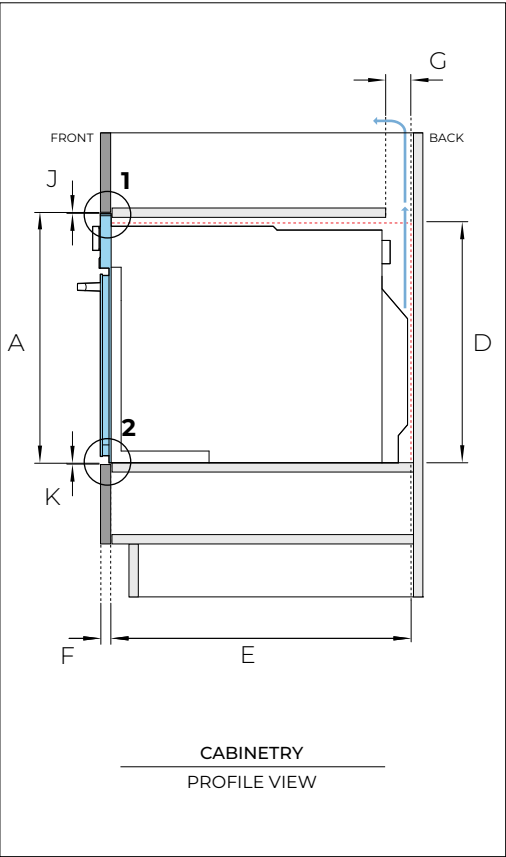

Model no: Combination Microwave Oven, 76cm - OM76NDTDX1	
Cabinetry Dimensions - Flush Installation	mm
A Overall cabinet height*	460
B Overall cabinet width - single installation	764
C Minimum inside width of cavity	724
D Minimum inside height of cavity	440
E Minimum inside depth of cavity	550
F Thickness of cabinetry front panel**	16-20
G Ventilation gap***	50

*Overall cabinet height is overall product height with minimum clearance above oven control panel to upper cabinetry front panel.
**Cabinetry shown in drawings 19mm panels.
***A rear ventilation air vent totalling 280cm² is required. The air vent must be located at the rear of the cabinet, it can be positioned at the base, sides, back or top of the cavity.


Note: Consider placement of shelf above minimum inside height of cavity.	
Product Dimensions	mm
H Overall height of product	458
I Overall width of product	760
J Thickness of oven front panel	20

Cabinetry Clearances	mm
K Minimum clearance above oven control panel to upper cabinetry front panel	2
L Minimum clearance between bottom of oven chassis to lower cabinetry front panel	2
M Minimum clearance between adjacent front panel or appliance	2


The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available on our website fisherpaykel.com

VENTILATION


Ventilation of 50mm x 560mm or totalling 280cm² is required. The air vent must be located at the rear of cabinet, it can be positioned at the base, top, sides, or back.





CLEARANCE ABOVE
PROFILE VIEW



CLEARANCE BOTTOM
PROFILE VIEW



ADJACENT CABINET
PLAN VIEW

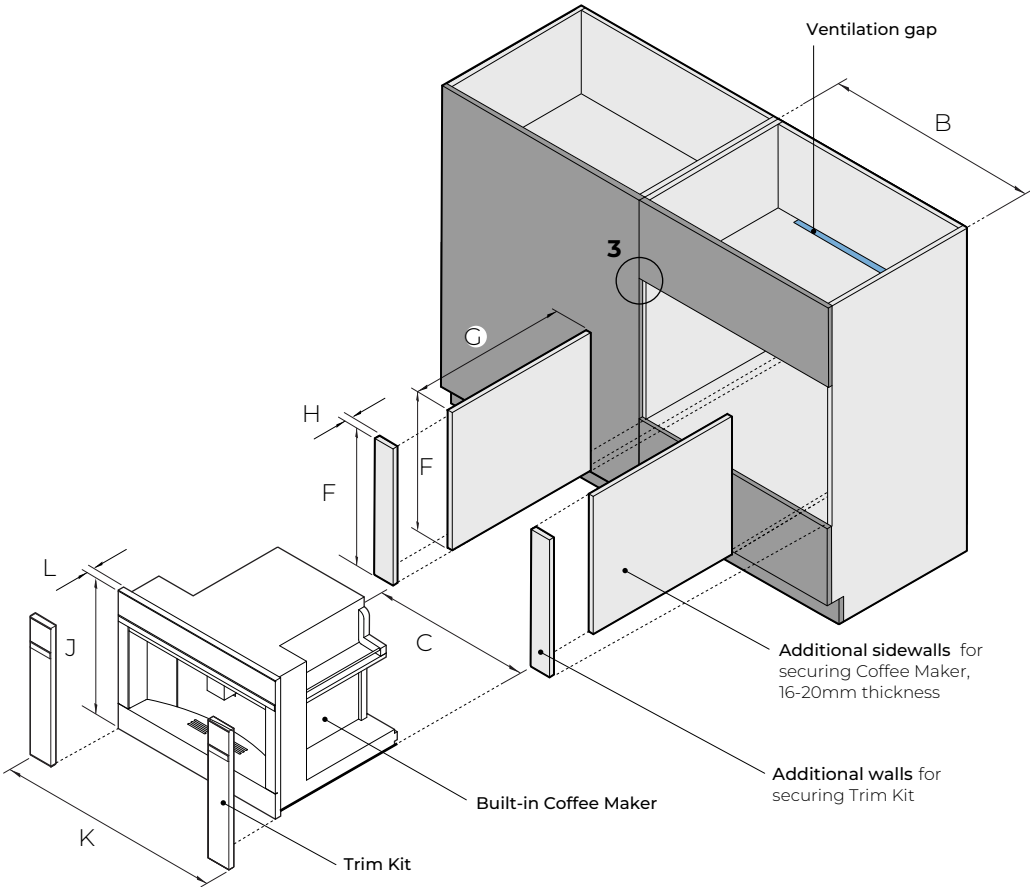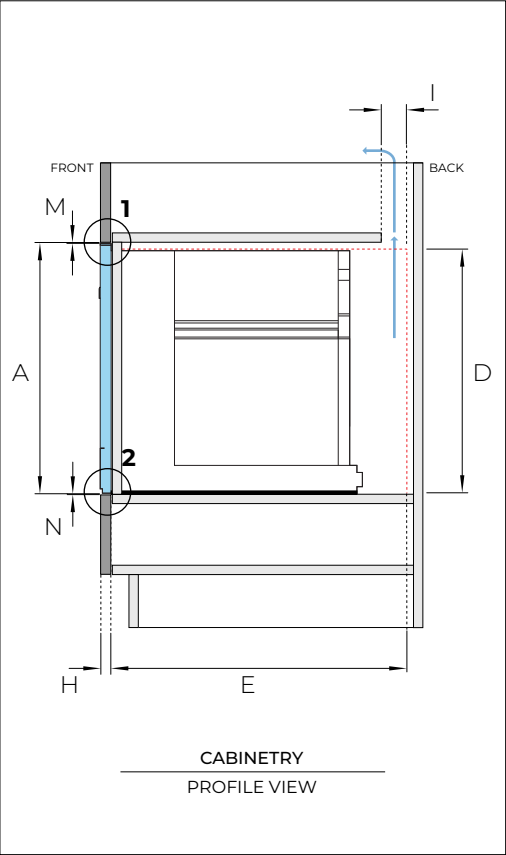

Model no:	
Built-in Coffee Maker, 60cm - EB60DSX1	
Trim Kit, 76cm - TK7630NDX1	
Cabinetry Dimensions - Flush Installation	
mm	
A Overall cabinet height with trim kit*	460
B Overall cabinet width - single installation	764
C Minimum inside width of cavity	560
D Minimum inside height of cavity	450
E Minimum inside depth of cavity	580
F Minimum height of additional side walls	450
G Minimum depth of additional side walls**	561
H Thickness of cabinetry front panel**	16-20
I Ventilation gap***	50

*Overall cabinet height is overall product height with minimum clearance above coffee maker control panel to upper cabinetry front panel
**Cabinetry shown in drawings 19mm panels.
***A rear ventilation air vent totalling 280cm² is required. The air vent must be located at the rear of the cabinet, it can be positioned at the base, sides, back or top of the cavity.

Note: Consider placement of shelf above minimum inside height of cavity.

Product Dimensions	
mm	
J Overall height of built-in coffee maker and trim kit	458
K Overall width of built-in coffee maker and trim kit	760
L Thickness of built-in coffee maker and trim kit front panel	20
Cabinetry Clearances	
mm	
M Minimum clearance above trim kit front panel to upper cabinetry front panel	2
N Minimum clearance between bottom of trim kit to lower cabinetry front panel	2
O Minimum clearance between adjacent front panel or appliance	2

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available on our website fisherpaykel.com






SERVICES

CONNECTION

Connections may be located in an adjacent cabinet to either side of the appliance. Ensure power will remain accessible following install to allow access for any future product maintenance.

BUILT-IN COFFEE MAKER




The power cable must be long enough to allow the appliance to be extracted from the cabinet to fill the coffee bean container. Fix the power cable with the clip.

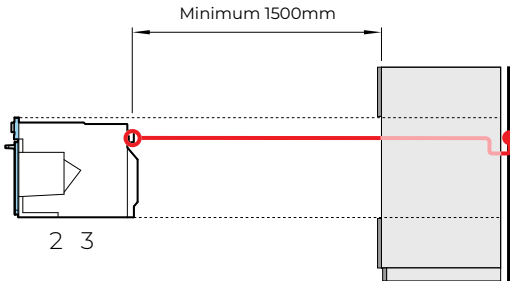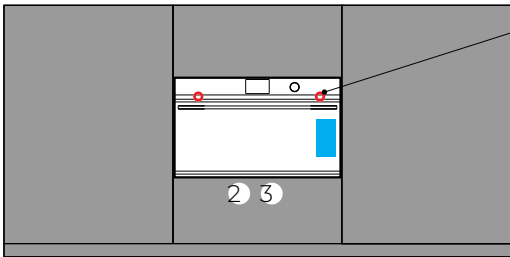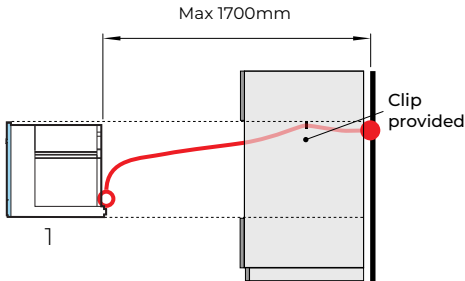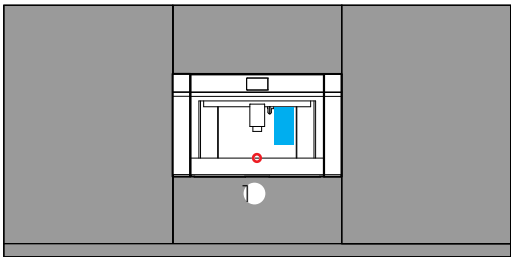

	1 BUILT-IN COFFEE MAKER EB60DSX1	2 COMBINATION MICROWAVE OVEN OM76NDTDX1	3 COMBINATION STEAM OVEN OS76NDTDX1
POWER CORD			
Maximum power cord length	1700mm*	-	-
Power cord free length	-	Minimum 1500mm**	Minimum 1500mm**
Location	Lower centered	Upper right	Upper left
Connection	Flex cord	Hard wired***	Hard wired***
*Measured from power outlet			
**The electrician provides sufficient free length of power supply cable to reach from the bottom rear of the cavity to at least 1500mm in front of the bottom edge of the opening			
***For more information, refer to the Installation Guide. Ensure power will remain accessible following install to allow access for any future product maintenance.			
WATER			
Total Capacity	2.4L	-	1.4L
Location	Water tank (internal)	-	Water tank (internal)
ELECTRICAL			
Supply	220-240 V, 50 Hz	220-240 V, 50 Hz	220-240 V, 50 Hz
Service	10 A	20 A	20 A

Note: Multiple product installation requires the design of power outlets according to local regulations.

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available on our website fisherpaykel.com

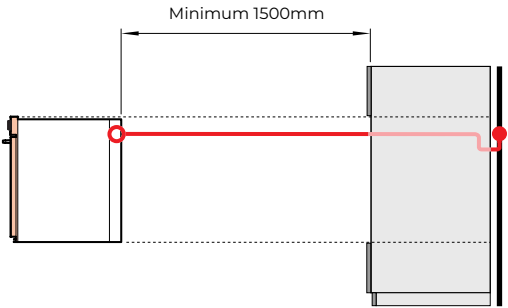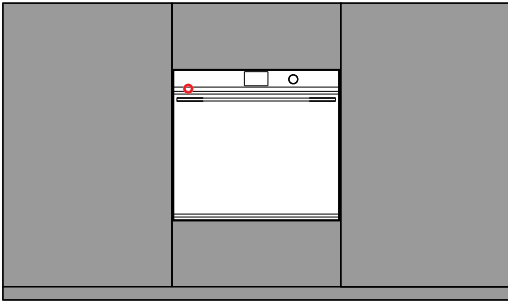

OVEN
OB76SDPTDX2



POWER CORD	
Power cord free length	Minimum 1500mm*
Location	Upper left
Connection	Hard wire**

*The electrician provides sufficient free length of power supply cable to reach from the bottom rear of the cavity to at least 1500mm in front of the bottom edge of the opening
**For more information, refer to the Installation Guide. Ensure power will remain accessible following install to allow access for any future product maintenance.

WATER	
Total Capacity	-
Location	-

ELECTRICAL	
Supply	220-240 V, 50 Hz
Service	20 A

Note: Multiple product installation requires the design of power outlets according to local regulations.

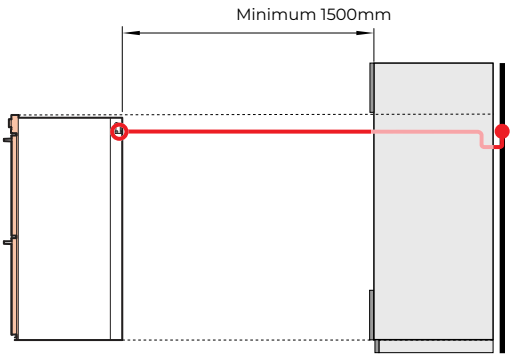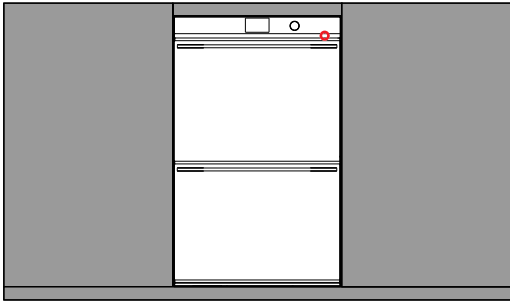

DOUBLE OVEN
OB76DDPTDX2

	Minimum 1500mm*
	Upper right
	Hard wire**

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available on our website fisherpaykel.com

