


Professional-Depth Wall Mount Liner Insert with Magic Lung® Blower

Designed for professional-style ranges and high-output cooking, this liner insert features a deeper capture area to help contain cooking vapors more effectively. Patented Magic Lung® technology delivers high-performance ventilation with exceptionally quiet operation, while SensaSource® automatically adjusts blower speed for enhanced grease control and fire safety. Dishwasher-safe components simplify cleanup.


To view available finishes & accessories please visit ventahood.com/products/BH458PSLD

SPECIFICATIONS

WIDTH	58 3/8"
DEPTH	22 1/2"
HEIGHT	12"
CFM ¹	1200
EQUIVALENT CFM ²	1800
SOUND RATING (HIGH SPEED) ³	6.6 Sones / 57.2 dB
LIGHTING ⁴	4 LEDs 2700K Warm White

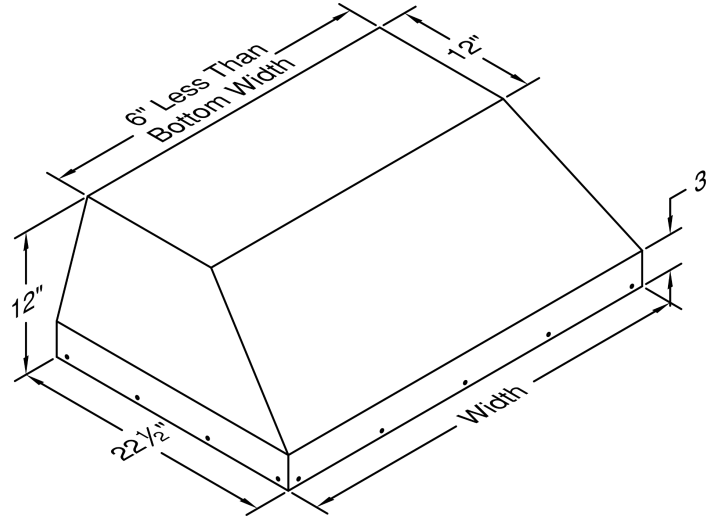


RECOMMENDED MOUNTING HEIGHT

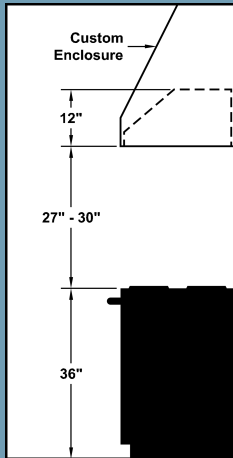


NOTE: Exceeding recommended mounting height may compromise performance.


CONNECTIONS

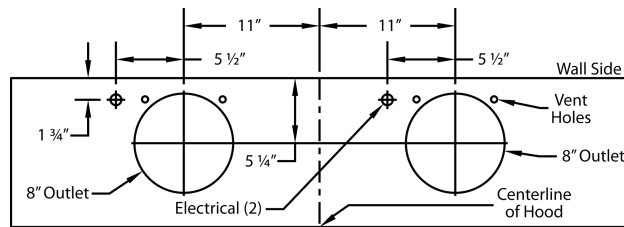

1200 CFM Double B200 Dual Blowers (Top View)



VP563 Transition (Optional) For B400 (Double B200 Dual Blowers)



VP563 transition centers outlet over top of hood.

ELECTRICAL/MECHANICAL SPECIFICATIONS FOR BLOWER UNIT

MODEL	VOLTS	AMPS	HZ	RPM	CFM @ 0.0" SP ⁵	CFM @ 0.1" SP	CFM @ 0.2" SP	CFM @ 0.3" SP	MIN. ROUND DUCT SIZE
2 x B200 Dual	115	7.5	60	1550	1200	1062	960	860	12" (113sq.in.)

¹ CFM (cubic feet per minute) measures airflow. ² Because Magic Lung® blowers use centrifugal filtration instead of traditional baffle or mesh filters, they move air more efficiently. When comparing to other brands, use Equivalent CFM to understand real-world performance. ³ Sones measure perceived loudness—lower values indicate quieter operation. Decibel values shown are approximate equivalents. ⁴ This model is not available with heat lamps. ⁵ Airflow (CFM) decreases as duct resistance (static pressure) increases. Values at 0.1"–0.3" SP reflect typical installed conditions.