

# Planning and Design Guide 2002 Vrs 2.0

DISHWASHERS WASHERS DRYERS ACCESSORIES INSTALLATION



### **ASKO DISHWASHERS**

D1706

#### **Dimensions & Technical Data**

	D1700	∠
	D1716	3
	D1776	4
	D1976	5
	Changing Standard Front Panels	6
	D1796Fl and D1996Fl	7
	Fitting the D1796Fl and D1996Fl Custom Door Panel	8
	D1796Fl and D1996Fl Custom Panel Installation Options	9
	D1996HNDL	.10
	D1996SS	
<b>Optio</b>	onal Accessories	.12
-	Integrated Fill Strip Installations	

This planning guide provides unit dimensions, cutout dimensions, and utility locations only. For more details, refer to the installation instructions that are supplied with the unit.

### **ASKO LAUNDRY**

### **Washers: Dimensions & Technical Data** W6441......16 **Drvers: Dimensions & Technical Data** T701 ......18 T721 ......19 T731 ......20 T761 ......21 T781 ......22 **Stacked Pair Installations** W6021/W6441 and T701 ......23 W6021/W6441 and T721 ......24 W6441 and T731 ......25 W6661 and T761 ......26 W6661 and T781 ......27 Cabinet/Closet Installations Side-by-side Installations......30 Optional Accessories......31

### **MODEL W6021**

### **UNIT DIMENSIONS**


	US	Metric
Height	33-1/2"-34-1/2"	850-876 mm
Width	23-7/16"	595 mm
Depth	24-7/16"	621 mm
Weight	167 lb	73 kg


### **TECHNICAL DATA**


Supply voltage Single-phase 230 V, 60 Hz

Water Pressure 15-146 psi Heating element 2000 W Internal Fuse 15 A

Power cord (attached) 220 V, 20 Amp

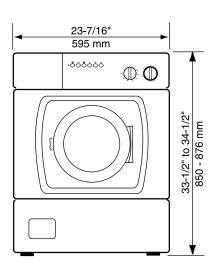

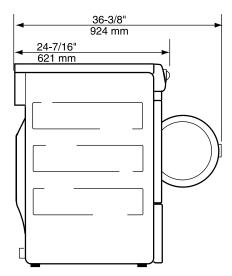

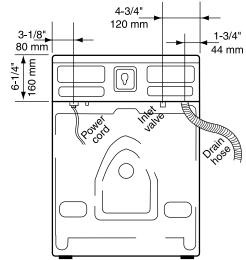

Every ASKO washer is delivered ready-fitted with a plug and is intended for connection to an ASKO dryer, which is equipped with a matching receptacle. If the washer is used separately or with another dryer, it must be on a separate 220 V, 20 Amp single-phase circuit.

Second-floor (above grade) installations must meet all local building codes.

When placing the washer next to a wall or cabinet, be sure to leave 1/2" (12 mm) of space between the washer and the wall or cabinet.

See pages 23–25 for stacked washer/dryer dimensions.

See pages 28–30 for cutout dimensions for closet and undercabinet installations.

# **ASKO WASHER**

### **MODEL W6441**

### **UNIT DIMENSIONS**


	US	Metric
Height	33-1/2"-34-1/2"	850-876 mm
Width	23-7/16"	595 mm
Depth	24-7/16"	621 mm
Weight	167 lb	73 kg

### **TECHNICAL DATA**

Supply voltage Single-phase 230 V, 60 Hz

Water Pressure 15-146 psi Heating element 2000 W Internal Fuse 15 A

Power cord (attached) 220 V, 20 Amp

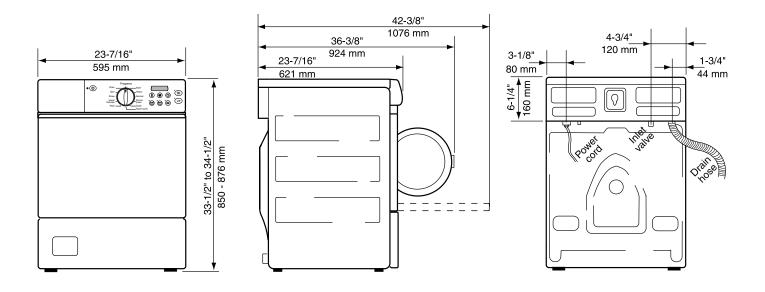

Every ASKO washer is delivered ready-fitted with a plug and is intended for connection to an ASKO dryer, which is equipped with a matching receptacle. If the washer is used separately or with another dryer, it must be on a separate 220 V, 20 Amp single-phase circuit.

Second-floor (above grade) installations must meet all local building codes.

When placing the washer next to a wall or cabinet, be sure to leave 1/2" (12 mm) of space between the washer and the wall or cabinet.

See pages 23–25 for stacked washer/dryer dimensions. See pages 28–30 for cutout dimensions for closet and undercabinet installations.

### **MODEL W6661**

### **UNIT DIMENSIONS**


	US	Metric
Height	33-1/2"-34-1/2"	850-876 mm
Width	23-7/16"	595 mm
Depth	23-7/16"	595 mm
Weight	174 lb	79 kg

### **TECHNICAL DATA**

Supply voltage Single-phase 230 V, 60 Hz

Water Pressure 15-146 psi Heating element 2000 W Internal Fuse 15 A

Power cord (attached) 220 V, 20 Amp

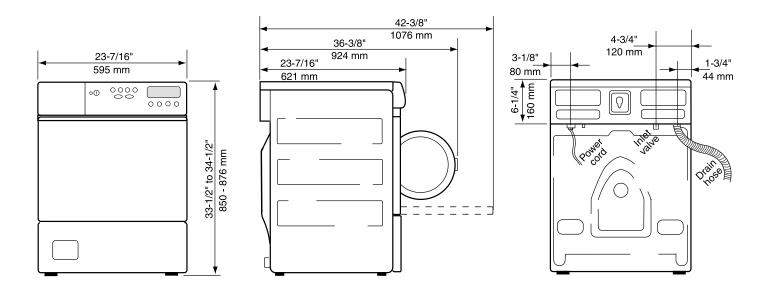

Every ASKO washer is delivered ready-fitted with a plug and is intended for connection to an ASKO dryer, which is equipped with a matching receptacle. If the washer is used separately or with another dryer, it must be on a separate 220 V, 20 Amp single-phase circuit.

Second-floor (above grade) installations must meet all local building codes.

When placing the washer next to a wall or cabinet, be sure to leave 1/2" (12 mm) of space between the washer and the wall or cabinet.

See pages 26–27 for stacked washer/dryer dimensions. See pages 28–30 for cutout dimensions for closet and undercabinet installations.

# ASKO DRYER

### **MODEL T701 VENTED DRYER**


### **UNIT DIMENSIONS**

	US	Metric
Height	33-1/2"-34-1/2	850-876 mm
Width	23-7/16"	595 mm
Depth	24-7/16"	621 mm
Weight	86 lb	39 kg

### **TECHNICAL DATA**

Supply voltage Single-phase 230 V, 60 Hz Heating element 2500 W Internal Fuse 15 A

**NOTE:** When on a separate outlet, use 220 V, 15 Amp single-phase circuit. When an ASKO washer is connected, use 220 V, 30 Amp single-phase circuit.

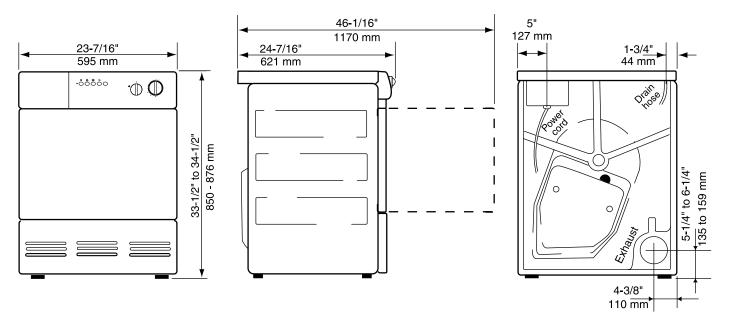

The door hinges on ASKO dryers are shipped left-hinged, but they are reversible. See the Dryer Use and Care Guide for more information.

When placing the dryer next to a wall or cabinet, be sure to leave 1/2" (12 mm) of space between the dryer and the wall or cabinet.

See page 23 for stacked washer/dryer dimensions.

See pages 28–30 for cutout dimensions for closet and undercabinet installations.

### **Venting Requirements**

WARNING! To reduce the risk of fire, vented dryers must be exhausted OUTDOORS or the equivalent.


Never cover the end of the dryer stub or vent hose with anything to catch lint, except for a UL-approved vent basket.

The hose should be run with as few bends as possible to the point of discharge. If necessary, it can be extended to a maximum of 20 feet (610 mm) of 4 in (10 cm) diameter ridged pipe. Make any bends as gentle as possible. A maximum of four 90° bends may

be fitted in the hose, otherwise the performance of the dryer will be impeded. Subtract 4 feet of hose for every 90° elbow.

If the hose is taken to a wall outlet, a ventilation grill should be fitted to prevent reverse flow of cold air. Fit the ventilation grill to the outside or inside of the wall.

This appliance should not be exhausted into a chimney, a wall, a ceiling, or a concealed space of a building. Only a metal ventilation grill should be used.

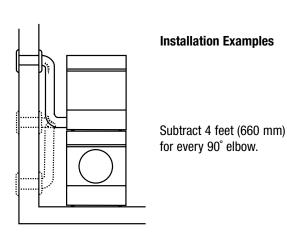

### **MODEL T721 CONDENSER DRYER**


### **UNIT DIMENSIONS**

	US	Metric
Height	33-1/2"-34-1/2	850-876 mm
Width	23-7/16"	595 mm
Depth	24-7/16"	621 mm
Weight	103 lb	47 kg

### **TECHNICAL DATA**

Supply voltage Single-phase 230 V, 60 Hz Heating element 2500 W Internal Fuse 15 A

**NOTE:** When on a separate outlet, use 220 V, 15 Amp single-phase circuit. When an ASKO washer is connected, use 220 V, 30 Amp single-phase circuit.

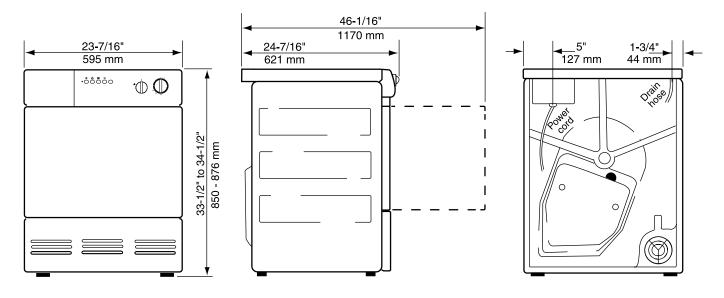

The door hinges on ASKO dryers are shipped left-hinged, but they are reversible. See the Dryer Use and Care Guide for more information.

When placing the dryer next to a wall or cabinet, be sure to leave 1/2" (12 mm) of space between the dryer and the wall or cabinet.

See page 24 for stacked washer/dryer dimensions.


See pages 28–30 for cutout dimensions for closet and undercabinet installations.

### **Condensation Drain Requirements**

If possible, you should install the dryer so the condensed water will continuously flow into a drain or sink. To do this, follow the instructions below:

- 1. Disconnect the short hose (1) from the blue connection. (It's okay to let the hose hang down.)
- 2. Connect the rubber hose supplied with the dryer to the blue nipple (2).
- 3. Run the hose to a drain or sink, as illustrated.

**NOTE:** The drain hose must not be more than 40" above the floor or the bottom of the unit.

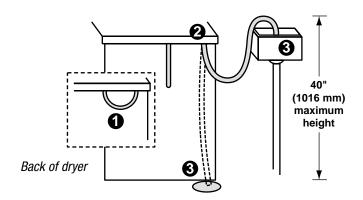

# ASKO DRYER

### **MODEL T731 VENTED DRYER**


### **UNIT DIMENSIONS**

	US	Metric
Height	33-1/2"-34-1/2	850-876 mm
Width	23-7/16"	595 mm
Depth	24-7/16"	621 mm
Weight	86 lb	39 kg

#### **TECHNICAL DATA**

Supply voltage Single-phase 230 V, 60 Hz Heating element 2500 W Internal Fuse 15 A

**NOTE:** When on a separate outlet, use 220 V, 15 Amp single-phase circuit. When an ASKO washer is connected, use 220 V, 30 Amp single-phase circuit.

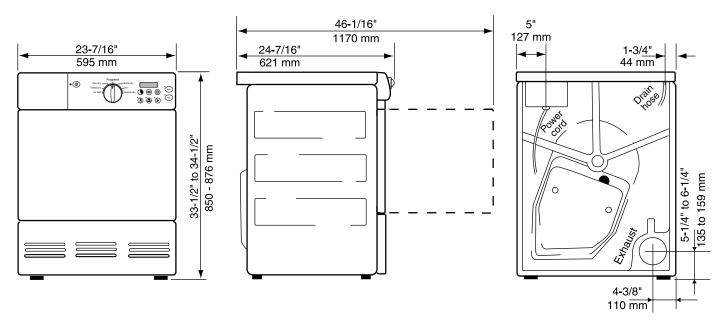

The door hinges on ASKO dryers are shipped left-hinged, but they are reversible. See the Dryer Use and Care Guide for more information.

When placing the dryer next to a wall or cabinet, be sure to leave 1/2" (12 mm) of space between the dryer and the wall or cabinet.

See page 25 for stacked washer/dryer dimensions.

See pages 28–30 for cutout dimensions for closet and undercabinet installations.

### **Venting Requirements**

WARNING! To reduce the risk of fire, vented dryers must be exhausted OUTDOORS or the equivalent.


Never cover the end of the dryer stub or vent hose with anything to catch lint, except for a UL-approved vent basket.

The hose should be run with as few bends as possible to the point of discharge. If necessary, it can be extended to a maximum of 20 feet (610 mm) of 4 in (10 cm) diameter ridged pipe. Make any bends as gentle as possible. A maximum of four 90° bends may

be fitted in the hose, otherwise the performance of the dryer will be impeded. Subtract 4 feet of hose for every 90° elbow.

If the hose is taken to a wall outlet, a ventilation grill should be fitted to prevent reverse flow of cold air. Fit the ventilation grill to the outside or inside of the wall.

This appliance should not be exhausted into a chimney, a wall, a ceiling, or a concealed space of a building. Only a metal ventilation grill should be used.

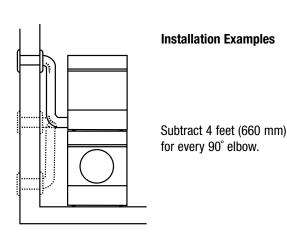

# ASKO DRYER

### **MODEL T761 VENTED DRYER**


### **UNIT DIMENSIONS**

	US	Metric
Height	33-1/2"-34-1/2	850-876 mm
Width	23-7/16"	595 mm
Depth	24-7/16"	621 mm
Weight	86 lb	39 kg

#### **TECHNICAL DATA**

Supply voltage Single-phase 230 V, 60 Hz Heating element 2500 W Internal Fuse 15 A

**NOTE:** When on a separate outlet, use 220 V, 15 Amp single-phase circuit. When an ASKO washer is connected, use 220 V, 30 Amp single-phase circuit.

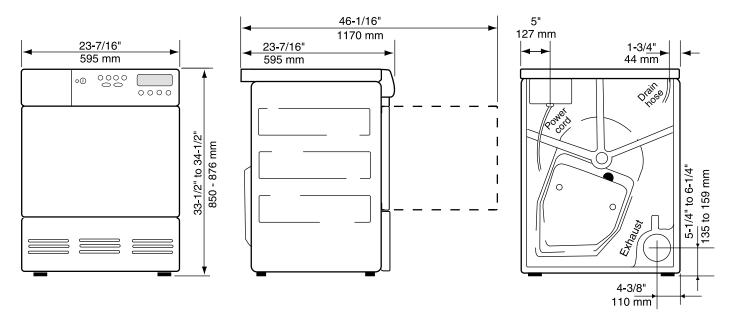

The door hinges on ASKO dryers are shipped left-hinged, but they are reversible. See the Dryer Use and Care Guide for more information.

When placing the dryer next to a wall or cabinet, be sure to leave 1/2" (12 mm) of space between the dryer and the wall or cabinet.

See page 26 for stacked washer/dryer dimensions.

See pages 28–30 for cutout dimensions for closet and undercabinet installations.

### **Venting Requirements**

WARNING! To reduce the risk of fire, vented dryers must be exhausted OUTDOORS or the equivalent.


Never cover the end of the dryer stub or vent hose with anything to catch lint, except for a UL-approved vent basket.

The hose should be run with as few bends as possible to the point of discharge. If necessary, it can be extended to a maximum of 20 feet (610 mm) of 4 in (10 cm) diameter ridged pipe. Make any bends as gentle as possible. A maximum of four 90° bends may

be fitted in the hose, otherwise the performance of the dryer will be impeded. Subtract 4 feet of hose for every 90° elbow.

If the hose is taken to a wall outlet, a ventilation grill should be fitted to prevent reverse flow of cold air. Fit the ventilation grill to the outside or inside of the wall.

This appliance should not be exhausted into a chimney, a wall, a ceiling, or a concealed space of a building. Only a metal ventilation grill should be used.

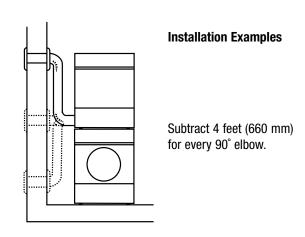

### **MODEL T781 CONDENSER DRYER**

#### **UNIT DIMENSIONS**


	US	Metric
Height	33-1/2"-34-1/2	850-876 mm
Width	23-7/16"	595 mm
Depth	23-7/16"	595 mm
Weight	103 lb	47 kg

### **TECHNICAL DATA**

Supply voltage Single-phase 230 V, 60 Hz Heating element 2500 W

Internal Fuse 15 A

**NOTE:** When on a separate outlet, use 220 V, 15 Amp single-phase circuit. When an ASKO washer is connected, use 220 V, 30 Amp single-phase circuit.

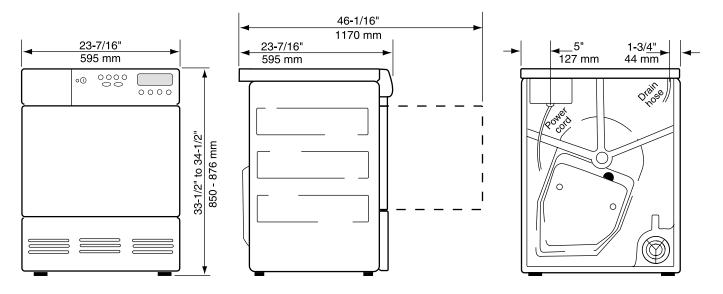

The door hinges on ASKO dryers are shipped left-hinged, but they are reversible. See the Dryer Use and Care Guide for more information.

When placing the dryer next to a wall or cabinet, be sure to leave 1/2" (12 mm) of space between the dryer and the wall or cabinet.

See page 27 for stacked washer/dryer dimensions.


See pages 28–30 for cutout dimensions for closet and undercabinet installations.

### **Condensation Drain Requirements**

If possible, you should install the dryer so the condensed water will continuously flow into a drain or sink. To do this, follow the instructions below:

- 1. Disconnect the short hose (1) from the blue connection. (It's okay to let the hose hang down.)
- 2. Connect the rubber hose supplied with the dryer to the blue nipple (2).
- 3. Run the hose to a drain or sink, as illustrated.

**NOTE:** The drain hose must not be more than 40" above the floor or the bottom of the unit.

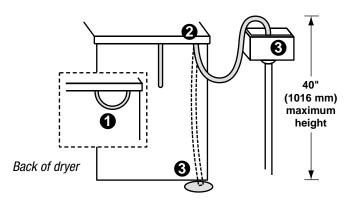

### W6021/W6441 AND T701 VENTED DRYER

#### **DIMENSIONS**

	US	Metric
Height	67"-69"	1702-1753 mm
Width	23-7/16"	595mm
Depth	24-7/16"	621 mm
Weight	253-258 lbs	115–117 kg

### WARNING! Never stack a washer on top of a dryer!

**Any ASKO dryer can be mounted on top of any matching ASKO washer.** Stacking kits are packed inside the dryer. Refer to the *ASKO Dryer Use and Care Guide* for stacking instructions.

Every ASKO washer is delivered ready-fitted with a plug and is intended for connection to an ASKO dryer, which is equipped with a matching receptacle. When an ASKO washer is connected to the dryer, use 220 V, 30 Amp single-phase circuit. When the dryer is

on a separate outlet, use 220 V, 15 Amp single-phase circuit. If the washer is used separately or with another dryer, it must be on a separate 220 V, 20 Amp single-phase circuit.


When placing a stacked set next to a wall or cabinet, be sure to leave 1/2" (12 mm) of space between the washer and the wall or cabinet.

See page 18 for venting requirements.

See pages 29 for stacked cabinet or closet dimensions.

WARNING! To reduce the risk of fire, vented dryers must be exhausted OUTDOORS or the equivalent.

Never cover the end of the dryer stub or vent hose with anything to catch lint, except for a UL-approved vent basket.

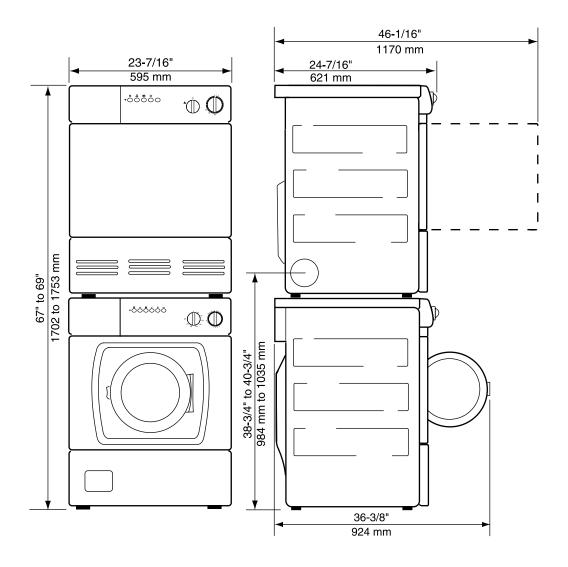

### W6021/W6441 AND T721 CONDENSER DRYER

#### **DIMENSIONS**

	US	Metric
Height	67"-69"	1702-1753 mm
Width	23-7/16"	595 mm
Depth	24-7/16"	621 mm
Weight	270-275 lbs	122-125 kg

### WARNING! Never stack a washer on top of a dryer!

Any ASKO dryer can be mounted on top of any matching ASKO washer. Stacking kits are packed inside the dryer. Refer to the ASKO Dryer Use and Care Guide for stacking instructions.


Every ASKO washer is delivered ready-fitted with a plug and is intended for connection to an ASKO dryer, which is equipped with a matching receptacle. When an ASKO washer is connected to the

dryer, use 220 V, 30 Amp single-phase circuit. When the dryer is on a separate outlet, use 220 V, 15 Amp single-phase circuit. If the washer is used separately or with another dryer, it must be on a separate 220 V, 20 Amp single-phase circuit.

When placing a stacked pair next to a wall or cabinet, be sure to leave 1/2" (12 mm) of space between the washer and the wall or cabinet.

ASKO condenser dryers can be installed to continuously drain through a hose attached to the rear of the machine. **To ensure** proper drainage, the drain must not be higher than 40" above the bottom of the dryer.

See page 19 for condensation drain requirements. See page 29 for stacked cabinet or closet installation dimensions.

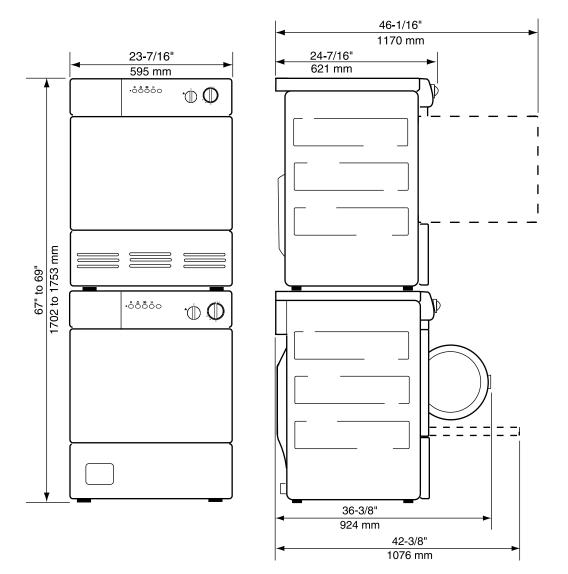

### **W6441 AND T731 VENTED DRYER**

#### **DIMENSIONS**

	US	Metric
Height	67"-69"	1702-1753 mm
Width	23-7/16"	595mm
Depth	24-7/16"	621 mm
Weight	253-258 lbs	115–117 kg

### WARNING! Never stack a washer on top of a dryer!

**Any ASKO dryer can be mounted on top of any matching ASKO washer.** Stacking kits are packed inside the dryer. Refer to the *ASKO Dryer Use and Care Guide* for stacking instructions.

Every ASKO washer is delivered ready-fitted with a plug and is intended for connection to an ASKO dryer, which is equipped with a matching receptacle. When an ASKO washer is connected to the dryer, use 220 V, 30 Amp single-phase circuit. When the dryer is

on a separate outlet, use 220 V, 15 Amp single-phase circuit. If the washer is used separately or with another dryer, it must be on a separate 220 V, 20 Amp single-phase circuit.


When placing a stacked set next to a wall or cabinet, be sure to leave 1/2" (12 mm) of space between the washer and the wall or cabinet.

See page 20 for venting requirements.

See pages 29 for stacked cabinet or closet dimensions.

WARNING! To reduce the risk of fire, vented dryers must be exhausted OUTDOORS or the equivalent.

Never cover the end of the dryer stub or vent hose with anything to catch lint, except for a UL-approved vent basket.

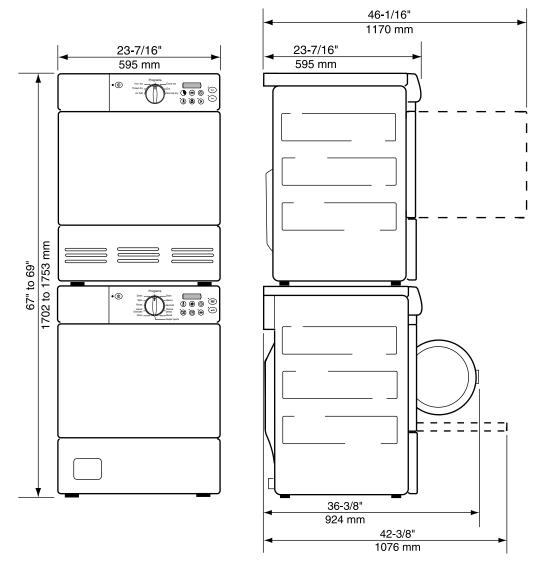

### **W6661 AND T761 VENTED DRYER**

#### **DIMENSIONS**

	US	Metric
Height	67"-69"	1702-1753 mm
Width	23-7/16"	595 mm
Depth	24-7/16"	621 mm
Weight	253-260 lbs	115–118 kg

### WARNING! Never stack a washer on top of a dryer!

**Any ASKO dryer can be mounted on top of any matching ASKO washer.** Stacking kits are packed inside the dryer. Refer to the *ASKO Dryer Use and Care Guide* for stacking instructions.

Every ASKO washer is delivered ready-fitted with a plug and is intended for connection to an ASKO dryer, which is equipped with a matching receptacle. When an ASKO washer is connected to the dryer, use 220 V, 30 Amp single-phase circuit. When the dryer is

on a separate outlet, use 220 V, 15 Amp single-phase circuit. If the washer is used separately or with another dryer, it must be on a separate 220 V, 20 Amp single-phase circuit.


When placing a stacked pair next to a wall or cabinet, be sure to leave 1/2" (12 mm) of space between the washer and the wall or cabinet.


See page 21 for venting requirements.

See page 29 for stacked cabinet or closet installation dimensions.

WARNING! To reduce the risk of fire, vented dryers must be exhausted OUTDOORS or the equivalent.

Never cover the end of the dryer stub or vent hose with anything to catch lint, except for a UL-approved vent basket.

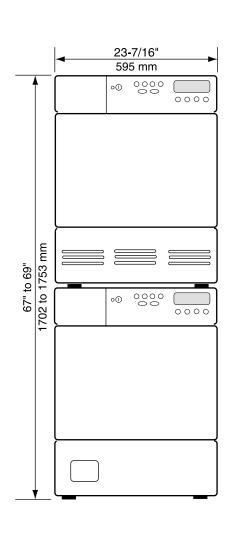

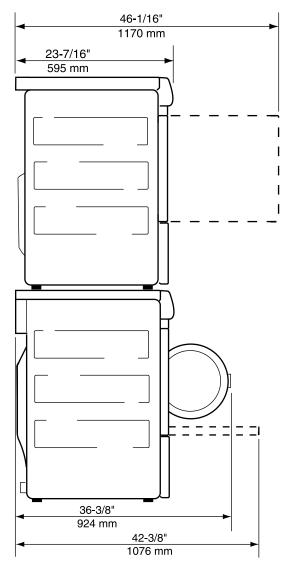

### **W6661 AND T781 CONDENSER DRYER**

#### **DIMENSIONS**

	US	Metric
Height	67"-69"	1702-1753 mm
Width	23-7/16"	595mm
Depth	24-7/16"	621 mm
Weight	270-277 lbs	122–126 kg

### WARNING! Never stack a washer on top of a dryer!

**Any ASKO dryer can be mounted on top of any matching ASKO washer.** Stacking kits are packed inside the dryer. Refer to the *ASKO Dryer Use and Care Guide* for stacking instructions.


Every ASKO washer is delivered ready-fitted with a plug and is intended for connection to an ASKO dryer, which is equipped with a matching receptacle. When an ASKO washer is connected to the dryer, use 220 V, 30 Amp single-phase circuit. When the dryer is

on a separate outlet, use 220 V, 15 Amp single-phase circuit. If the washer is used separately or with another dryer, it must be on a separate 220 V, 20 Amp single-phase circuit.

When placing a stacked pair next to a wall or cabinet, be sure to leave 1/2" (12 mm) of space between the washer and the wall or cabinet.

ASKO condenser dryers can be installed to continuously drain through a hose attached to the rear of the machine. To ensure proper drainage, the drain must not be higher than 40" above the bottom of the dryer.

See page 22 for condensation drain requirements. See page 29 for stacked cabinet or closet installation dimensions.

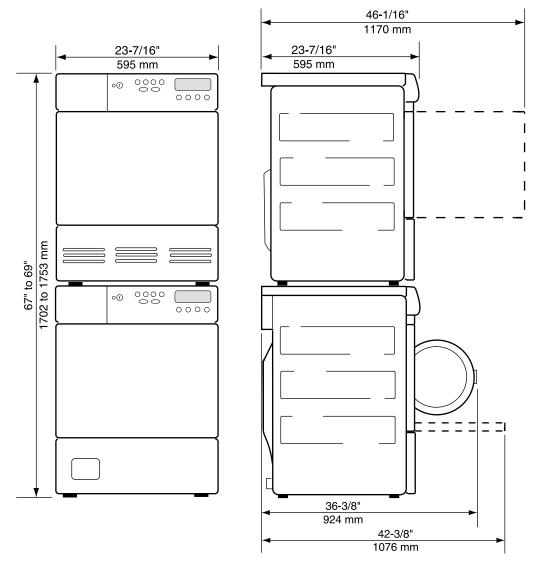


### STACKED CABINET OR CLOSET INSTALLATIONS

ASKO's front panel controls make it possible to install the washers and dryers under a cabinet or in a closet. Make sure there is a 1/2" (12 mm) minimum clearance between units and between units and cabinet or wall. To ensure proper ventilation, we recommend louvered doors, particularly for condenser dryers.

Every ASKO washer is delivered ready-fitted with a plug and is intended for connection to an ASKO dryer, which is equipped with a matching receptacle. When an ASKO washer is connected to the dryer, use 220 V, 30 Amp single-phase circuit. When the dryer is on a separate outlet, use 220 V, 15 Amp single-phase circuit. If the washer is used separately or with another dryer, it must be on a separate 220 V, 20 Amp single-phase circuit.

#### **VENTED DRYER OPENING**

T701 and T721 dryers can be vented from the rear or the left or right side. The cabinet cutout illustrated below gives the dimensions for a rear exhaust. **See page 18 for venting requirements.** 

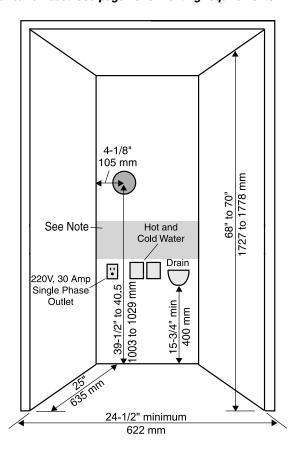

WARNING! To reduce the risk of fire, vented dryers must be exhausted OUTDOORS or the equivalent.

Never cover the end of the dryer stub or vent hose with anything to catch lint, except for a UL-approved vent basket.


#### **CUTOUT DIMENSIONS**

US	Metric
68" to 70"	1727 to 1778 mm
24-1/2" minimum	622 mm
25"	635 mm
	24-1/2" minimum

### **CONDENSER DRYER OPENING**

ASKO condenser dryers can be installed to continuously drain through a hose attached to the rear of the machine.

To ensure proper drainage, the drain must not be higher than 40" above the bottom of the dryer. See page 19 for condensation drain requirements.

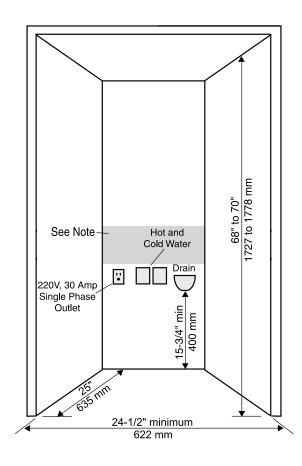

**NOTE:** To avoid crimping the electrical and water connections, do not install the hookups between the area of 26" to 35" from the floor (as indicated by shaded area in illustrations above).

For stacked installations, we recommend a 6-foot cord.


# **ASKO LAUNDRY**

### SINGLE UNIT CABINET INSTALLATIONS


ASKO's front panel controls make it possible to install the washers and dryers under a cabinet or in a closet. Make sure there is a 1/2" (12 mm) minimum clearance between units and between units and cabinet or wall.

Every ASKO washer is delivered ready-fitted with a plug and is intended for connection to an ASKO dryer, which is equipped with a matching receptacle. When an ASKO washer is connected to the dryer, use 220 V, 30 Amp single-phase circuit. When the dryer is on a separate outlet, use 220 V, 15 Amp single-phase circuit. If the washer is used separately or with another dryer, it must be on a separate 220 V, 20 Amp single-phase circuit.

#### **WASHER OPENING**

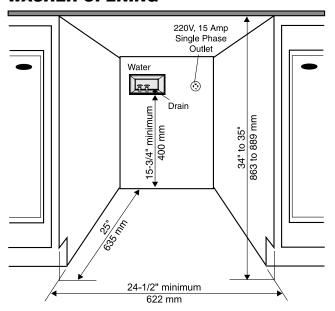

#### **CONDENSER DRYER OPENING**

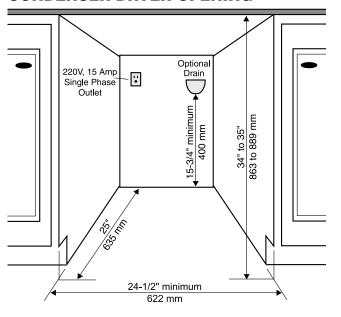

#### **CUTOUT DIMENSIONS**


	US	Metric
Height	34"-35"	863-889 mm
Width	24-1/2" minimum	622 mm
Depth	25"	635 mm

**NOTE:** For these installations, a custom countertop may be required.

#### **VENTED DRYER OPENING**

ASKO vented dryers can be vented from the rear or the left or right side. The cabinet cutout illustrated below gives the dimensions for a rear or left exhaust.

See page 18 for venting requirements.

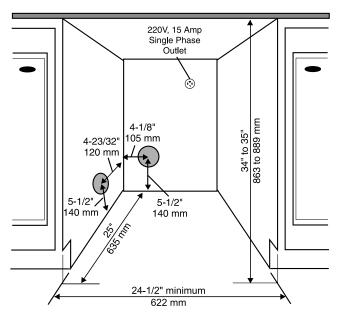

WARNING! To reduce the risk of fire, vented dryers must be exhausted OUTDOORS or the equivalent. See page 18 for venting requirements.

Never cover the end of the dryer stub or vent hose with anything to catch lint, except for a UL-approved vent basket.

### Condenser Dryers

ASKO condenser dryers can be installed to continuously drain through a hose attached to the rear of the machine. To ensure proper drainage, the drain must not be higher than 40" above the bottom of the dryer.

See page 19 for condensation drain requirements.

# **ASKO LAUNDRY**

### SIDE-BY-SIDE UNDER-COUNTER INSTALLATIONS

ASKO's front panel controls make it possible to install the washers and dryers under a cabinet or in a closet. Make sure there is a 1/2" (12 mm) minimum clearance between units and between units and cabinet or wall.

Every ASKO washer is delivered ready-fitted with a plug and is intended for connection to an ASKO dryer, which is equipped with a matching receptacle. When an ASKO washer is connected to the dryer, use 220 V, 30 Amp single-phase circuit. When the dryer is on a separate outlet, use 220 V, 15 Amp single-phase circuit. If the washer is used separately or with another dryer, it must be on a separate 220 V, 20 Amp single-phase circuit.

# CUTOUT DIMENSIONS

	US	Menic
Height	68" to 70"	1727 to 1778 mm
Width	24-1/2" minimum	622 mm
Depth	25"	635 mm

**NOTE:** For these installations, a custom countertop may be required.

**NOTE:** To avoid crimping the electrical and water connections, do not install the hookups between the area of 26" to 35" from the floor.

# OPENING FOR WASHER AND VENTED DRYER


T701 and T721 dryers can be vented from the rear or the left or right side. The cabinet cutout illustrated at right gives the dimensions for a rear and left exhaust. **See page 18 for venting requirements.** 


WARNING! To reduce the risk of fire, vented dryers must be exhausted OUTDOORS or the equivalent.

Never cover the end of the dryer stub or vent hose with anything to catch lint, except for a UL-approved vent basket.

### OPENING FOR WASHER AND CONDENSER DRYER

ASKO condenser dryers can be installed to continuously drain through a hose attached to the rear of the machine. To ensure proper drainage, the drain must not be higher than 40" above the bottom of the dryer. See page 19 for condensation drain requirements.

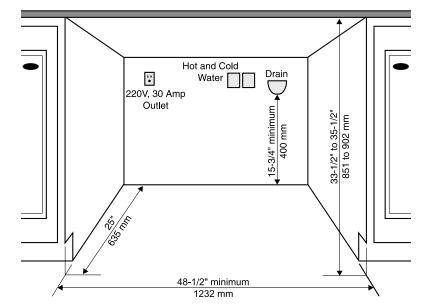

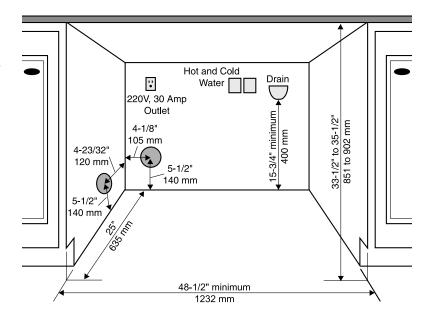

# **ASKO LAUNDRY**

# OPTIONAL LAUNDRY ACCESSORIES

### **SLIDE-OUT SHELF**

Installs between stacked pair. Extends 15" from units.


8061907-0 White 8061907-26 Black



### STEEL LAUNDRY PLATFORM

Will raise a washer or a dryer (one machine per platform) 12" off the floor.

8052000 White 8052000-B Black



### WHITE SPACE TRIM KIT

Installs between stacked pair to provide a single unit appearance.

8063981


## THE AWARDS JUST KEEP STACKING UP.



W660 and T760 for 2000



W600 for 2001



Dishwashers selected by 91% of homeowners as the quietest in independent tests.



D1996FI Dishwasher



1805 Dishwasher Excellence In Design Innovation



All ASKO products are covered by the Good Housekeeping Seal.



W660 Washer & T760 Dryer



Money Isn't All You're Saving

ASKO dishwashers and washers meet the Energy Star® requirements.



W660 Washer & T760 Dryer 2000



W6661 Washer & T761 Dryer 2002



www.askousa.com