

Viking Range Corporation

111 Front Street

Greenwood, Mississippi 38930 USA

(662) 455-1200

For product information,

call 1-888-VIKING1 (845-4641)


or visit the Viking Web site at

vikingrange.com





# Viking Installation Guide

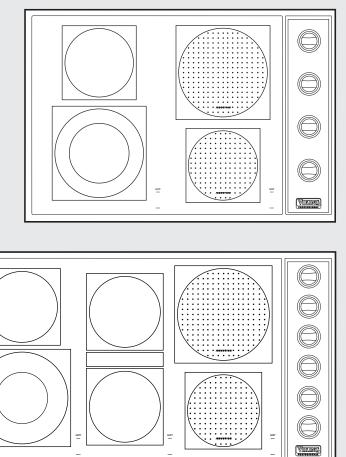

### Built-In Electric Induction/Radiant Cooktop

# Table of Contents

Warnings & Important Safety Instructions	
Dimensions (30"W.)	
Dimensions (36"W.)	
Specifications	
Cutout Dimensions	
Clearance Dimensions	1
Electrical Requirements	1
General Information	1
Installation	1
Final Preparation	1
Performance Checklist	1
Service & Registration	1

## **IMPORTANT**— Please Read and Follow

• Before beginning, please read these instructions completely and carefully.

Your safety and the safety of others is very important.

We have provided many important safety messages in this manual and on your appliance. Always read and obey all safety messages.



This is the safety alert symbol. This symbol alerts you to hazards that can kill or hurt you and others.

All safety messages will be preceded by the safety alert symbol and the word "DAN-GER," "WARNING" or "CAUTION." These words mean:

### **A** DANGER

Hazards or unsafe practices which WILL result in severe personal injury or death

### 

Hazards or unsafe practices which COULD result in severe personal injury or death

### **A** CAUTION

Hazards or unsafe practices which COULD result in minor personal injury or property damage.

All safety messages will identify the hazard, tell you how to reduce the chance of injury, and tell you what can happen if the instructions are not followed.

- DO NOT remove permanently affixed labels, warnings, or plates from the product. This may void the warranty.
- Please observe all local and national codes and ordinances.
- Please ensure that this product is properly grounded.
- The installer must leave these instructions with the consumer who should retain for local inspector's use and for future reference.
- Installation must conform with local codes or, in the absence of codes, the National Electrical Code, ANSI/NFPA 70-latest edition.

In Canada: Electrical installation must be in accordance with the current CSA C22.1 Canadian Electrical Codes Part 1 and/or local codes.

## **IMPORTANT**– Please Read and Follow

### Dimensions (30"W.)

### **WARNING**



#### **BURN HAZARD**

The use of cabinets for storage above the appliance may result in potential burn hazard. Combustible items may

ignite, metallic items may become hot and cause burns. If a cabinet storage is to provided the risk can be reduced by installing a range hood that projects horizontally a minimum of 5" beyond the bottom of the cabinets.

### **A** WARNING



ELECTRICAL GROUNDING INSTRUCTIONS

This cooktop must be electrically grounded in accordance with local codes or, in the absence of codes, with the National Electrical Code, ANSI/NFPA 70-latest edition. FOR PERSONAL SAFETY, THIS APPLIANCE MUST BE PROP-ERLY GROUNDED.

### **A** CAUTION

Be sure the electric power is off from the breaker box to the junction box until the cooktop is installed and ready to operate. The junction box should be connected to a suitable ground.

### **WARNING**




The electrical power to the unit must be shut off while line connections are being made. Failure to do so could result in serious injury or death.


### **A** WARNING




**FIRE AND ELECTRICAL** SHOCK HAZARD DO NOT use an extension cord with this appliance. Such use

may result in fire, electrical shock, or other personal injury.

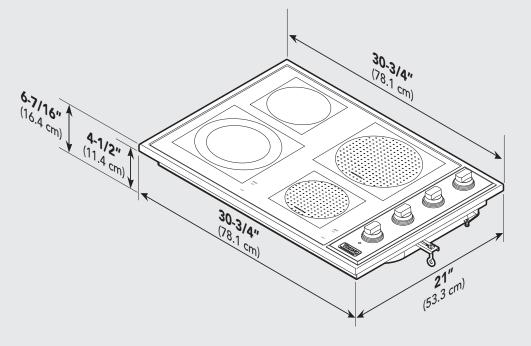







**Front View Height** 

## Dimensions (36"W.)

### Electric 36" Induction/Radiant Cooktop

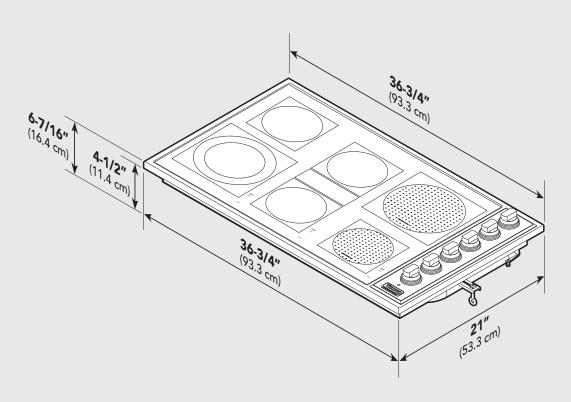

Front	View	Height




# Specifications

Induction/Radiant Cooktop							
Description	30"W. VCCU106-4B		36″W. VCCU166-6B				
Overall width	30-3/4" (78.1 cm)		36-3/4" (93.3 cm)				
Overall height from bottom To top of knobs To top of cooking surface To bottom edge of frame	6-11/16" (17.0 cm) 5-7/32" (13.3 cm) 4-15/32" (11.4 cm)						
Overall depth from rear	21" (53.3 cm)						
Cutout width	28-9/16" (72.6 cm) minimum to 29-5/8" (75.2 cm) maximum		34-9/16" (87.8 cm) minimum to 35-1/2" (90.2 cm) maximum				
Cutout depth	19-1/8" (48.6 cm) minimum to 19-7/8" (50.5 cm) maximum						
Electrical requirements	240-208/120 VAC/60Hz; 3-wire conduit with a No. 10 ground wire.						
Maximum amp usage	240V—37.9 amps (9.1 kw) 208V—35.4 amps (7.4 kw)		240V—55.0 amps (13.2 kw) 208V—50.2 amps (10.4 kw)				
Surface element rating Right front Right rear Center front Bridge Center rear Left front Left rear Approximate	240V 1,800 watts 3,300 watts N/A N/A 2,500 watts 1,500 watts 52 lb (22	208V 1,560 watts 2,800 watts N/A N/A N/A 1,875 watts 1,125 watts	240V 1,800 watts 3,300 watts 1,800 watts 800 watts 1,800 watts 2,200 watts 1,500 watts 63 lb (2)	208V 1,560 watts 2,800 watts 1,350 watts 600 watts 1,350 watts 1,650 watts 1,650 watts 1,125 watts			
shipping weight	52 ID. (23	52 lb. (23.4 kg) 63 lb. (28.6 kg)					

## **Cutout Dimensions**

### Cutout Dimensions (30"W.)

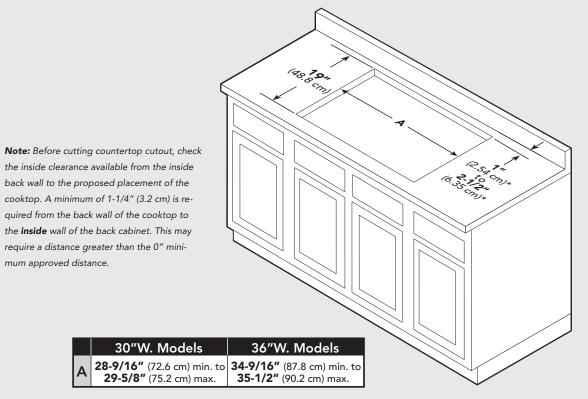


\*Note: Based on 24" deep cabinet with 3/4" backsplash.


# **Clearance Dimensions**


#### **Interior Cabinet Clearances**

**IMPORTANT:** The electronic components for the induction elements in the cooktop need air circulation. To ensure long life of electronic components, it is required that a minimum of 8" (3.8 cm) open space remain between the bottom of the cooktop and any shelf underneath. The maximum length of the shelf underneath is 18" (45.7 cm). There should be no partition or shelf **directly** underneath the unit.

It is also required that the exit air ports at the rear are not blocked. There should be a minimum of 1-1/4" (3.2 cm) space between the exit air ports at the rear of the unit and any nearby obstruction, including downdrafts.

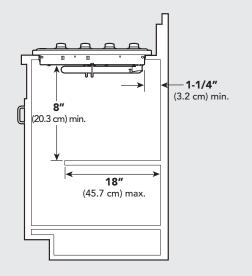

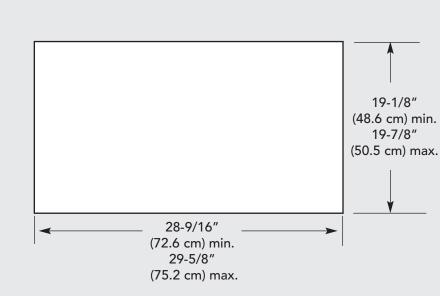

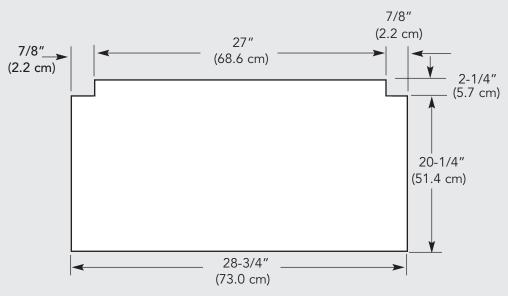


#### **30" W. CUTOUT**

#### 30" W. CUTOUT w/ DOWNDRAFT


### Cutout Dimensions (36"W.)

# **Clearance Dimensions**

#### **36" W. CUTOUT**

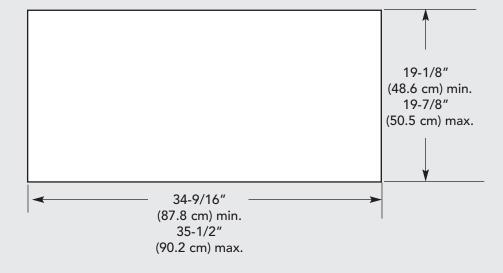

36" W. CUTOUT w/ DOWNDRAFT

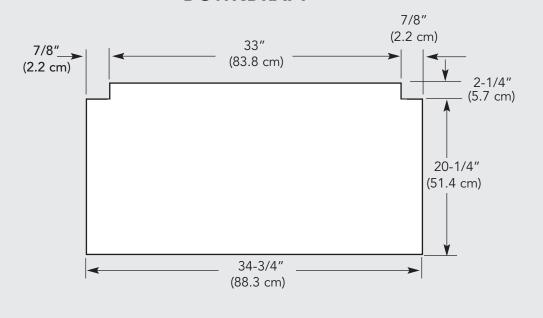

#### Proximity to Side Cabinet Installation


- The cooktop may be installed directly to existing base cabinets.
- The cooktop **CANNOT** be installed directly adjacent to sidewalls, tall cabinets, tall appliances, or other side vertical surfaces above 36" (91.4 cm) high. There must be a minimum of 6" (15.2 cm) side clearance from the cooktop to such combustible surfaces above the 36" (91.4 cm) counter height.
- Within the 6" (15.2 cm) side clearance to combustible vertical surfaces above 36" (91.4 cm), the maximum wall cabinet depth must be 13" (33.0 cm) and wall cabinets within this 6" (15.2 cm) side clearance must be 18" (45.7 cm) above the 36" (91.4 cm) high countertop.
- Wall cabinet above the cooktop must be a minimum of 36" (91.4 cm) above the countertop for a full width of the cooktop.

Dimensions shown are for use with combustible surfaces unless otherwise stated.

**\*Note:** 36" minimum unless using a hood. **\*\*Note:** Only applies to combustible surfaces.

#### Minimum Clearances from Adjacent Combustible Construction

- Above countertop 36" (91.4 cm) minimum
- Side 6" (15.2 cm)
- Rear 0" (0.0 cm)
- Within 6" side clearance. Wall cabinets no deeper than 13" (33.0 cm)
- Must be minimum 18" (45.7 cm) above countertop
- Wall cabinets directly above the product must be minimum 36" (91.4 cm) above the countertop

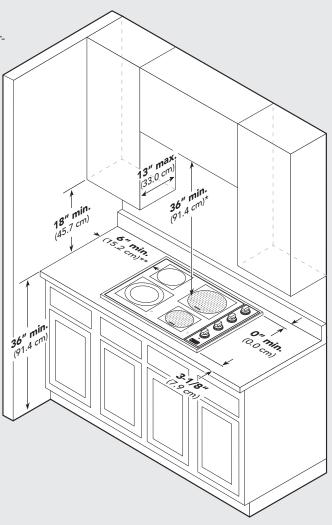

# Electrical Requirements

### **WARNING**

**ELECTRICAL** 2加 GROUNDING INSTRUCTIONS

This cooktop must be electrically grounded in accordance with local codes or, in the absence of codes, with the National Electrical Code, ANSI/NFPA 70-latest edition. FOR PERSONAL SAFETY, THIS APPLIANCE MUST BE PROP-ERLY GROUNDED.

#### **Electrical Requirements**

Check your local codes regarding this unit. This cooktop is supplied with a 3-wire, 240/208 volt, 60 HZ electrical system. A white (neutral) is not needed for this unit. See next section for grounding instructions. It should be fused separately.

### **A** CAUTION



Be sure the electric power is off from the breaker box to the junction box until the cooktop is installed and ready to operate. The junction box should be con-

nected to a suitable ground.

Refer to the specifications chart for kilowatt rating and recommended amperage. House wiring and fusing must comply with local codes. If no local codes are applicable, wire in accordance with the National Electrical Code, ANSI/NFPA 70-latest edition.

### **WARNING**

The electrical power to the unit must be shut off while line connections are being made. Failure to do so could result in serious injury or death.

#### **Electrical Connection**

When making the wire connections, use the entire length of the conduit provided (3 feet). The conduit must not be cut. <u>Connect the</u> red and black leads from the unit conduit to the corresponding leads in the junction box. The bare ground wire in the conduit is connected to the unit frame. When connecting to a 3-conductor branch circuit, if local codes permit, connect the bare ground connector lead of the unit to the branch circuit neutral (gray or white in color).

### **A** WARNING




FIRE AND ELECTRICAL SHOCK HAZARD **DO NOT** use an extension cord with this appliance. Such use may result in fire, electrical shock, or other personal injury.

# **General Information**


#### **READ AND FOLLOW ALL WARNING** AND CAUTION INFORMATION WHEN INSTALLING THIS APPLIANCE.

- Keep appliance area clear and free from combustible materials, gasoline and other flammable vapors.
- Disconnect the electrical supply prior to servicing or cleaning.

## Installation

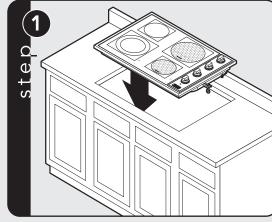


Lower cooktop into cutout.

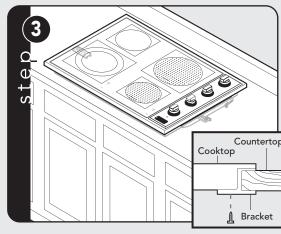


Screw brackets to burner box with sheet metal screw. (Two bracket assemblies included)

- When removing the cooktop for service and/or cleaning, disconnect AC power supply.
- Electrical requirements are listed in the product specifications under the "Electrical Requirements" section.

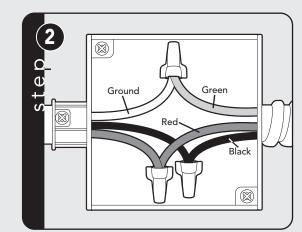

Connect the red and black leads from the unit conduit to the corresponding leads in the junction box.

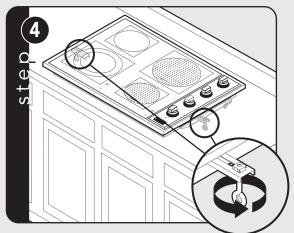

Screw sheet metal screws into brackets and tighten firmly against bottom of countertop. Note: Be careful not to crack or damage counter by overtightening.

# **Final Preparation**

- Some stainless steel parts may have a plastic protective wrap which must be peeled off.
- All stainless steel body parts should be wiped with hot, soapy water and with a liquid cleaner designed for this material. If buildup occurs, **DO NOT** use steel wool, abrasive cloths, cleaners, or powders!
- If it is necessary to scrape stainless steel to remove encrusted materials, soak with hot, wet cloths to loosen the material, then use a wood or nylon scraper.

**DO NOT** use a metal knife, spatula, or any other metal tool to scrape stainless steel! Scratches are almost impossible to remove.

## Performance Checklist

A qualified installer should carry out the following checks:

- □ Check top surface elements
  - 1. Starting with the left front element, turn the corresponding knob to the Hi position-Left front indicator should flash.
- 2. Place an induction compatible piece of cookware onto the left front burner-Left front indicator should be solid.
- 3. Remove cookware and repeat steps for other elements.

# Service & Registration

Only authorized replacement parts may be used in performing service on the cooktop. **DO NOT** repair or replace any part of the appliance unless specifically recommended in the manual. All other servicing should be referred to a qualified technician. Contact Viking Range Corporation, 1-888-VIKING1 (854-4641), for the nearest service parts distributor in your area or write to:

**Cooktop** – The serial number and model number for your unit can be found by looking under the cooktop. Record the following information indicated below. You will need it if service is ever required.

Model number

Serial number

Date of purchase \_

Date installed

Dealer's name

Address

These installation instructions should remain with the unit for future reference.

#### VIKING RANGE CORPORATION PREFERRED SERVICE 1803 Hwy 82W Greenwood, Mississippi 38930 USA