



Pro-Grand 30" All Gas Range with 4 Burners


SKU	PRG304EG
Range Size	30" Range
Type	Gas
22" High Back Shelf	HS30R
12" Low Back Guard	N/A
9" Back Guard	Included
3 ⁵ / ₈ " Trim Piece	IT30R
Black Knob Accessory Kit	KNOBRGBLK
GENERAL INFORMATION	
120 Volts, 3 Prong Plug, 60 Hz, Single Phase A.C., 20 Amps	15 Amps
Approximate Shipping Weight (lbs.)	450
ADDITIONAL ACCESSORIES	
Blue Knob Accessory Kit	KNOBRGBLU

FEATURES & BENEFITS

Patented, sealed, brass Star Burners distribute heat evenly, and 375 BTU/hr ExtraLow® setting simmers without scorching.

Easy temperature reference at a glance with an electronically controlled indicator.

Professional Pro Grand Gas Range with Cutout

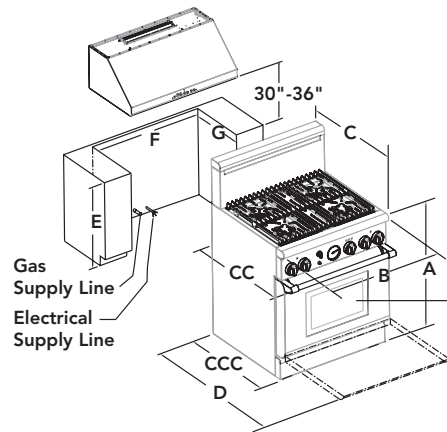

Model No.	BTU/hr ^{††}	Ovens kW.	Overall Dimensions						Cutout Dimensions*			Oven Cap. (cu. ft.)
			A**	B	C†	CC	CCC	D	E	F	G	
PRG304EG	85,000	N/A	35 ⁷ / ₈ to 36 ³ / ₄	29 ⁷ / ₈	29 ¹ / ₂	32 ⁵ / ₈	27 ¹ / ₈	47 ³ / ₈	35 ⁷ / ₈ to 36 ³ / ₄	30	24 to 25 ¹ / ₂	4.6

L.P. Converter orifices - PD ranges order (PLPKIT). Black Knob Kit (KNOBRGBLK) ordered separately. All-Gas Self-Cleaning PG ranges factory (NG) Natural Gas or factory (LP) Liquid Propane ordered separately.

Notes: 1) All height, width and depth dimensions are shown in inches. 2) Oven doors should be removed for doorway clearance. *Please refer to installation instructions prior to making cutout. Installation instructions and back guard information are available at www.thermador.com. **Height without back guard or high shelf. ***You must install your professional range with one of the back guards listed above. They are ordered separately — except for the 30" range, which comes standard with a 9" back guard. Approved for residential use only. †Measured to front of bullnose. ††BTU/hr includes surface burners and the oven.

