# JTP70BM/CM/WM GE® 30" Built-In Single Convection Wall Oven

#### Dimensions and Installation Information (in inches)

KW Rating	
240V	4.5
208V	3.4
Breaker Size	
240V	20 Amps
208V	20 Amps

Most 30" Wall Cabinets can be used with this unit.

**Note:** These ovens are not approved for stackable installations.

**Note:** Cabinets installed adjacent to wall ovens must have an adhesion spec of at least a 194°F temperature rating.

Door handle protrudes 3" from door face. Cabinets and drawers on adjacent 45° and 90° walls should be placed to avoid interference with the handle.

**Installation Information:** Before installing, consult installation instructions packed with product for current dimensional data.

Electric wall ovens are not approved for installation with a plug and receptacle. They must be hard wired in accordance with installation instructions.


Side-by-side installations require at least 2" between cutouts.

Suitable bracing to support runners

Suitable bracing to support content runners

Suitable bracing to support 21-5/8"

(must support 275 lbs.)

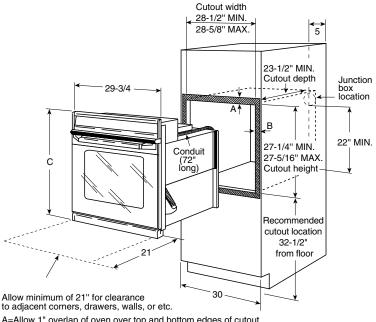

A=Allow 1" overlap of oven over top and bottom edges of cutout. B=Allow 11/16"-3/4" for overlap of oven over side edges of cutout. C=28-1/4" without trim and 28-3/4" with trim.

For answers to your Monogram,® GE Profile™ or GE® appliance questions, visit our website at ge.com or call GE Answer Center® service, 800.626.2000.






# JTP70BM/CM/WM GE® 30" Built-In Single Convection Wall Oven

### Dimensions and Installation Information (in inches)

#### **Optional Undercounter Installation**

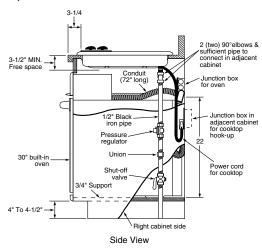


This installation is to achieve minimum gap between bottom of countertop and control panel.

**Note:** For this installation, the bottom trim will not be flush with a typical 4" toe kick.

**Note:** Cabinets installed adjacent to wall ovens must have an adhesion spec of at least a 194°F temperature rating.


# Optional Undercounter Installation With 30" CleanDesign or Sealed Burner Gas Cooktop

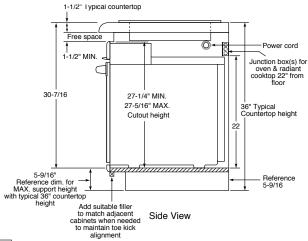

**Note:** 36" ribbon cooktops are approved for use over GE 30" single wall ovens only. 30" ribbon cooktops are approved for use over GE 30" and GE 27" single wall ovens. Refer to cooktop and wall oven installation information packed with products for current dimensional data.

**Installation Information:** Before installing, consult installation instructions packed with product for current dimensional data.

#### **Undercounter Installation**

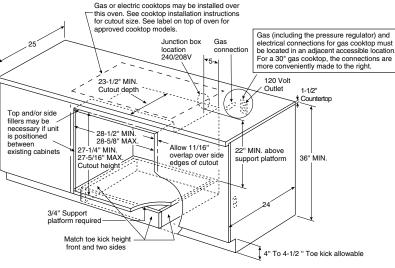

For answers to your Monogram,® GE Profile™ or GE® appliance questions, visit our website at ge.com or call GE Answer Center® service, 800 626 2000






## JTP70BM/CM/WM

### GE® 30" Built-In Single Convection Wall Oven

### **Features and Benefits**

- PreciseAir<sup>™</sup> Convection System Delivers even air and heat circulation for superior baking and roasting results
- Flat Back Convection Features a more streamline convection fan that better accommodates baking and roasting pans
- Convection Bake (Multi-Mode) Offers two specialized modes for different cooking needs: multi-rack convection baking and convection roasting
- Eight-Pass Bake Element A powerful, continuous heating element loops throughout the oven, delivering evenly cooked foods
- Six-Pass Broil Element Provides a more even coverage of the food on the broiler pan
- Electronic Oven Controls One-touch electronic pads are easy-to-use and allow for simple oven operation
- Hidden Bake Oven Interior Hides previously exposed bottom element to deliver a clean interior appearance
- Heavy-Duty Oven Racks Provides extra support
- Model JTP70BMBB Black on black
- Model JTP70CMCC Bisque on bisque
- Model JTP70WMWW White on white

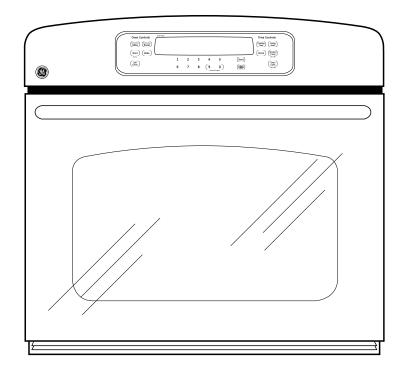

For answers to your Monogram,® GE Profile™ or GE® appliance questions, visit our website at ge.com or call GE Answer Center® service, 800.626.2000.



