

ISLAND HOOD

Maggiore offers a "minimalist" hood design that's only 2.5" high and compliments the many futuristic products and clean architectural lines often seen in today's modern home. Maggiore features include a powerful 600 CFM blower, halogen lighting with 2 light intensities, dishwasher-safe anodized aluminum mesh filters and high-tech multi-functional LCD controls that deliver convenience and safety. Designed for standard ducted installation, Maggiore can also be installed as a recirculating system using the Recirculating Kit, available as an accessory.

FEATURES

Advanced Electronic Touch Controls

State-of-the-art electronics deliver maximum user convenience and control. LCD function display with elegant blue illumination combined with low-profile, easy-to-clean touchpads is your interface with a multi-function control system, including...

- On/Off control
- Programmable timer and buzzer
- Four blower speeds
- · Clock

- HeatGuard[™] automatically adjusts blower speed if heat exceeds 158°F for safety and convenience
- Two light intensities
- Filter Saturation Monitor detects excessive levels within both
 grease and charcoal filters
- 600 CFM 4-Speed Internal Blower
- 4 Halogen Lamps with two light intensities (12V 20W bulbs included)






Elica-Patented Stainless Steel Micro Hole Filter Available as an optional upgrade

(see back for accessory details)

- Dishwasher-Safe Anodized Aluminum Mesh Filter
- Telescopic Chimney Extension For ceiling heights 7' 2" to 9'11"
- 8" Round Duct Transition
- One-Way No Return Valve eliminates outside air drafts.



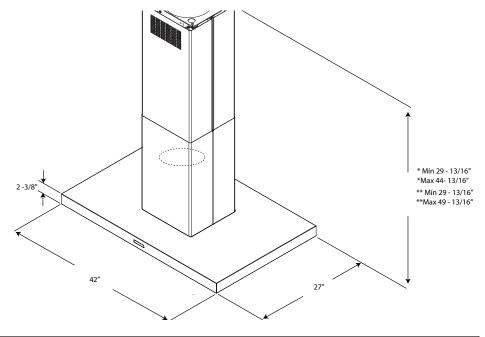

MODEL		DIMENSIONS SHIPPING			
NUMBER	FINISH	WIDTH	DEPTH	HEIGHT	WEIGHT
EMG642SS	Stainless Steel	42"	27"	2-3/8"	109 lbs

HOOD MOUNTING HEIGHT ABOVE COOKING SURFACE

G	AS	ELEC	CTRIC
minimum	maximum	minimum	maximum
30"	34"	24"	30"

CHIMNEY HEIGHT (based on recommended mounting heights listed above)

DUC	TED	RECIRC	ULATING
Gas min./max.	Electric min./max.	Gas min./max.	Electric min./max.
8' - 9' 11"	7' 6" - 9' 7"	8' - 9' 6"	7' 2" - 9' 2"

BLOWER PERFORMANCE

SPEED LEVEL	AIRFLOW IN CFM (CUBIC FEET PER MINUTE)	SOUND LEVEL (IN SONES)
1	180	1.6
2	300	3.5
3	470	6.5
4	600	8.7

MAGGIORE ACCESSORIES

MODEL NUMBER	DESCRIPTION	SHIPPING WEIGHT
EXXRCK04	Recirculating Kit	8.8 lbs
EXXGFKMH	Stainless Steel Micro Hole Filter - One	5.5 lbs



culus ELECTRICAL: AC Input: 120V - 60

AC Input: 120V - 60Hz, AC Power Max.: 530W at 4.4 Amps