



Drop-In Cooktops

FFGC3625L S/W/B

36" Gas



Product Dimensions

Width	36"
Depth	21-3/4"
Height	4-1/4"

More Easy-To-Use Features

Color-Coordinated Control Knobs

White and Black cooktops come with matching knobs — while Stainless Steel models feature our neutral black knobs.

Electronic Pilotless Ignition

Saves energy and can be ignited manually when electricity is out.

Porcelain Cooktop Grates

Grates are durable and easy to clean.

LP Gas Conversion Option

Available in:



Burners	BTU
Right Front	9,500
Right Rear	5,000
Left Front	9,500
Left Rear	9,500
Center XtraZone Burner	15,000

¹Select models only.

Signature Features

Ready-Select™ Controls

Select options or control cooking temperature with our easy-to-use controls.

Sealed Gas Burners

Enjoy easier cleanup and a burner that stays looking great.

Quick Boil


Boil water faster with our 15,000 BTU burner.

Durable Stainless Steel Cooktop¹

A premium look that stands up to everyday use.

Features	
Controls	Ready-Select™
Surface Type	Deep-Well Stainless Steel (S), Deep-Well Color-Coordinated Porcelain (W/B)
Sealed Gas Burners	Yes
Grates	Continuous Cast Iron with Black Matte Finish
Right Front Element (BTU)	9,500
Right Rear Element (BTU)	5,000
Left Front Element (BTU)	9,500
Left Rear Element (BTU)	9,500
Center XtraZone Burner (BTU)	15,000
Control Location	Right Side
Knob Color	Black (S), Color-Coordinated (W/B)
Knob Type	Plastic
Bowl Type	Black (S), Color-Coordinated (W/B)
Specifications	
Power Supply Connection Location	Right Rear
Gas Supply Connection Location	Right Rear
LP Gas Conversion Kit	Included
Voltage Rating	120V / 60V / 15A
Connected Load (kW Rating) @ 120 Volts ¹	.8
Amps @ 120 Volts	1.0
Minimum Circuit Required (Amps)	15
Approved for Electric Single Wall Oven Combination Installation	
Shipping Weight (Approx.)	60 Lbs.

¹For use on adequately wired 120V, dedicated circuit having 2-wire service with a separate ground wire. Appliance must be grounded for safe operation.

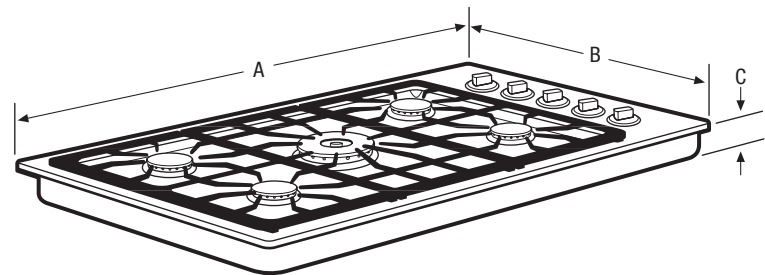

NOTE: Always consult local and national electric and gas codes. Refer to Product Installation Guide for detailed installation instructions on the web at frigidaire.com.



Product Dimensions	
A - Width	36"
B - Depth	21-3/4"
C - Height	4-1/4"

Cutout Dimensions	
Width (Min.)	33-7/8"
Width (Max.)	34-1/4"
Depth (Min.)	19-1/4"
Depth (Max.)	19-3/4"
Height	8"

Granite Countertop Installation Kit available.

Accessories information available on the web at frigidaire.com