



Drop-In Cooktop

FFGC3603L W

36" Gas



Product Dimensions

Width	36"
Depth	18-5/8"
Height	3-1/2"

More Easy-To-Use Features

Porcelain Cooktop Grates

Grates are durable and easy to clean.

LP Gas Conversion Option

A.D.A. Compliant¹

Available in:



White
(W)

Burners	BTU
Right Front	9,000
Right Rear	9,000
Left Front	9,000
Left Rear	9,000

¹When properly installed, meets the appliance standards in the Americans with Disabilities Act and the Architectural Barriers Act Accessibility Guidelines as published by the United States Access Board on June 23, 2004, as amended August 5, 2005.

Signature Features

Ready-Select™ Controls

Select options or control cooking temperature with our easy-to-use controls.

Color-Coordinated Control Knobs

White cooktops come with matching knobs.

Electronic Pilotless Ignition

Saves energy and can be ignited manually when electricity is out.


Spill Saver™ Drip Bowls

Cooktop features chrome drip bowls that make cleaning up spills quick and easy.

Features	
Controls	Ready-Select™
Surface Type	Color-Coordinated Porcelain
Grates	Steel Round with Black Gloss Finish
Right Front Element (BTU)	9,000
Right Rear Element (BTU)	9,000
Left Front Element (BTU)	9,000
Left Rear Element (BTU)	9,000
Control Location	Center Front
Knob Color	Color-Coordinated
Knob Type	Plastic
Bowl Type	Chrome
Certifications	
A.D.A. Compliant ¹	Yes
Specifications	
Power Supply Connection Location	Center Front
Gas Supply Connection Location	Center Front
LP Gas Conversion Kit	Included
Voltage Rating	120V / 60V / 15A
Connected Load (kW Rating) @ 120 Volts ²	.8
Amps @ 120 Volts	1.0
Minimum Circuit Required (Amps)	15
Approved for Electric Single Wall Oven Combination Installation	
Shipping Weight (Approx.)	30 Lbs.

¹When properly installed, meets the appliance standards in the Americans with Disabilities Act and the Architectural Barriers Act Accessibility Guidelines as published by the United States Access Board on June 23, 2004, as amended August 5, 2005.

²For use on adequately wired 120V, dedicated circuit having 2-wire service with a separate ground wire. Appliance must be grounded for safe operation.

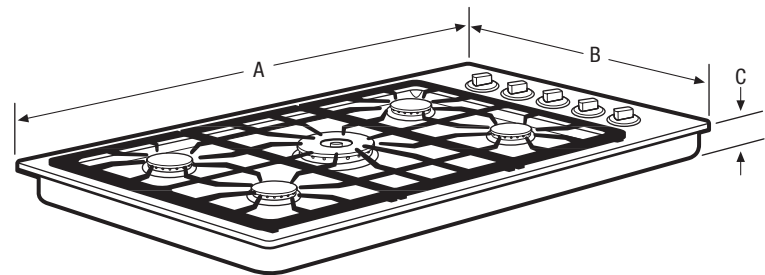

NOTE: Always consult local and national electric and gas codes. Refer to Product Installation Guide for detailed installation instructions on the web at frigidaire.com.



Product Dimensions	
A - Width	36"
B - Depth	18-5/8"
C - Height	3-1/2"

Cutout Dimensions	
Width (Min.)	34-1/4"
Width (Max.)	34-3/8"
Depth (Min.)	16-5/8"
Depth (Max.)	16-3/4"
Height	5"

Granite Countertop Installation Kit available.

Accessories information available on the web at frigidaire.com