

HYBRID HEAT PUMP WATER HEATER

EE66WP30PS

Electric Hybrid Heat Pump Water Heater - Single Vent



66 Gallons

SIGNATURE FEATURES



ENERGY EFFICIENCY

Uses up to 70% less energy than standard electric tank-style water heaters.



PREMIUM STAINLESS STEEL

Durable premium stainless steel exterior and interior tank.



ENERGY STAR®

Exceeds current energy standards, providing a more energy efficient water heating solution for your home.



NORTHERN CLIMATE TIER 2 CERTIFICATION

Exceeds current ENERGY STAR® standards providing the most versatile, quiet and efficient water heater in its class.

PRODUCT DIMENSIONS

Height 70-1/2" Diameter 25-1/2"

MORE EASY-TO-USE FEATURES

LIFETIME LIMITED WARRANTY

Lifetime Limited Warranty supported by a 1-year labor, 10-year parts and 15-year tank warranty to provide peace of mind.

LONGER LASTING

Lasts up to 2 times longer than standard electric tank-style water heaters.

LED DIGITAL DISPLAY

Conveniently adjust temperature and operating modes with the LED digital control and display.


Available in:



Stainless (S)



CONTROL PANEL FEATURES	
Mechanical Button Controls	Yes
LED Digital Display	Yes
Temperature Display Mode	°F
PERFORMANCE	
Energy Factor (Hybrid-AUTO Mode)	2.35
First Hour Rating (Hybrid–AUTO Mode) (Gallons)	70
FEATURES	
Air Filter	Yes
Anode Rod	Yes
Condensate Overflow Drain	Yes
Default Temperature (°F)	120
Heat Pump Ambient Temp Operating Range (Factory Default) (°F)	32-120
Heat Pump Ambient Temp Operating Range (Programmable) (°F)	20-120
Operating Modes	Auto (Default,) Econ, Heater
Operating Noise (Heat Pump - AUTO/ECON Mode)	48 DBA
Recirculation Compatible	Yes
Temperature Setting Range (°F)	90-135
ACCESSORIES	
Vent Duct Compatible (Exhaust)	Yes-Single
Rigid/Smooth Interior Dryer Venting	Optional
T&P Relief Valve	Included
ADDITIONAL FEATURES	
ENERGY STAR® Qualified	Yes
Northern Cold Climate Specification	Tier 2
SPECIFICATIONS	
Exhaust Vent Diameter	6"
Condensation Drain Connection Size	3/4" Threaded
Condensate Outlet Location	Top Rear
Drainage Outlet Location	Bottom Left
Hot Water Outlet Connection Size	3/4" Threaded
Water Inlet Connection Size	3/4" Threaded
Water Inlet Location	Bottom Left
Water Outlet Location	Middle Left
Water Supply Pressure Range (PSI)	15 - 150
Tank Capacity (Gallons)	66
Tank Material	Stainless Steel
Wiring Port Location	Top Right
Voltage Rating	240V, 60Hz, 30A
Back-Up Heater Element Output (kW)	4
Max Current (Heater Element - HEATER Mode) (A)	23
Maximum Output (Hybrid - AUTO Mode) (kW)	6.2
Primary Heater Element Output (kW)	4
Color –	
Stainless Steel	S
Shipping Weight (Approx.)	263 Lbs.

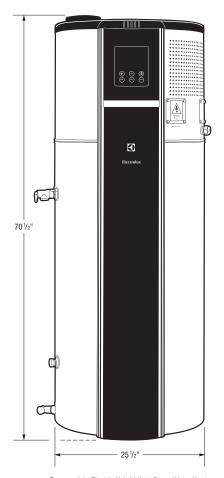

For complete Electric Hybrid Heat Pump Water Heater installation details, refer to Product Installation Guide on the web at electroluxappliances.com

Height	70-1/2"
Diameter	25-1/2"

FOR WATER HEATING INQUIRIES, PLEASE CONTACT ELECTROLUX WATER HEATING AT 1-888-360-8557.

